HITACHI

SM00030

C24W410SN
C24W430N
C24W511TN
C28W410SN
C28W410TN
C28W411TN
C28W430N
C28W433N
C28W510SN
C28W510TN
C28W511NA
C32W1TN
C32W433N
C32W510SN
C32W511TN
C32WD2TN2
CL28W410TAN
CL32WD2TAN2
CP28W410TAN

SERVICE MANUAL
MANUEL D'ENTRETIEN
WARTUNGSHANDBUCH

CAUTION:
Before servicing this chassis, it is important that the service technician read the "Safety Precautions" and "Product Safety Notices" in this service manual.

ATTENTION:
Avant d'effectuer l'entretien du châassis, le technicien doit lire les «Précautions de sécurité» et les «Notices de sécurité du produit» présentés dans le présent manuel.

VORSICHT:
Vor Öffnen des Gehäuses hat der Service-Ingenieur die „Sicherheitshinweise" und „Hinweise zur Produktsicherheit" in diesem Wartungshandbuch zu lesen.

Data contained within this Service manual is subject to alteration for improvement.

Les données fournies dans le présent manuel d'entretien peuvent faire l'objet de modifications en vue de perfectionner le produit.

Die in diesem Wartungshandbuch enthaltenen Spezifikationen können sich zwecks Verbesserungen ändern.

SPECIFICATIONS AND PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT

Colour Television
December 2000

CIRCUIT DESCRIPTION

A7 PSU

From switch on the A.C. voltage is rectified by diodes D901 - D904, which produces approximately 300V across C905. This is then applied to the collector of Q903 via the primary winding of T900. Initially the voltage on pin 7 of IC900 will rise to approximately 16V via R901, D905 and Q905. This allows the internal circuitry of IC900 to generate a sawtooth waveform at pin 4, from which a squarewave output is obtained at pin 6. This output is applied to the gate of Q901 which turns on and off, this alters the voltage on the emitter of Q903 causing this device to turn on and off, generating the outputs in the secondary windings of T900.

After initial power up IC900 pin 7 is supplied from the bias winding (pin 4) of T900 via D911 for continued operation. The bias winding voltage is also rectified by D910 which is then supplied to the base of Q906 via R930. Q906 turns on and pulls the base of Q905 low via R930 turning Q905 off, this is done to reduce the power dissipated by R901 once the power supply is running.

A current sense circuit consisting of R910, R900, R922 and VR923 feeds back a voltage to pin 3 of IC900, this voltage is compared with an internal reference voltage ,of approximately 0.8V should the applied voltage exceed the reference the pulse width is limited from output pin 6. In this way Q903 is offered protection from changes in primary current.

R909 and C914 act as a soft start circuit, this limits the pulse width output from pin 6 during the initial start up period, allowing a gradual rise to full power.

Q907, Q908 and associated circuitry are for reducing the frequency of the power supply when the set is in standby.

A sense voltage rectified by D910 consisting of R908 and R906, supplies pin 2 of IC900, this is then compared to an internal reference voltage. If it exceeds the internal reference the output from pin 6 will be limited by the internal error amp. ZD970 will go short if the +B exceeds 180V.

The secondary voltage induced in T900 winding 14/16 is rectified by D950, producing the H.T. voltage which is smoothed by C977. In standby the H.T. rises slightly.

Winding 12/17 produces approximately 11V via D951, which is smoothed by C957. This is then applied to IC952 and Q957. IC952 is a +5V regulator which supplies the micro processor in both standby and normal running modes.

Q957 is used to switch, and regulate the +8V supply to the chassis, the output voltage being set by ZD957, D965, D966 and D967/J967A. The +8V is also used as the header supply for the +5V supply regulator IC951.

Winding 11/18 produces approximately 26V via D952, which is smoothed by C955 and then applied Q951 through R974, which is used as a current sense. The output from Q951 supplies +26V for the audio amplifier IC4000.

H.T. regulation is controlled by Q954 stage. The base of Q954 is set at a pre-determined level by the resistor network R950, VR950 and R953. The emitter of Q954 is held at approximately 6V2 by ZD950. Should the H.T. rise, the base voltage becomes more positive than the emitter, and this difference is amplified by the transistor and applied to opto-coupler IC901. The output from IC901 is then applied to pin 1 of IC900 which regulates the H.T. by altering the duty cycle of the waveform output from pin 6 of IC900.

STANDBY SWITCHING

The low voltage supplies are switched off in standby, this is controlled by the micro processor which outputs a high from pin 24 in standby and a low when the set is out of standby. This is then applied to resistors R948 and R982. This "high" is also applied to the base of Q950 via R982 which turns on, pulling the base of Q952 low, allowing Q951 to turn off, which removes the 26V to the audio section. When the set is out of standby the low applied to R982 is passed to the base of Q950 which turns off, allowing the base of Q952 to be pulled high via R993, Q952 in turn pulls the base of Q951 low through R992. Q951 will now supply the 26V audio (on Dolby models the 26V is also used as the header supply for the 18V regulator, IC953 which is provided to power the IR surround speaker transmitter via the phono socket at the rear of the set). The high applied to R948 is passed to the base of Q959 which turns on, pulling the base of Q957 low which turns off removing the chassis 8V supply. With the set out of standby the low applied to R948 is passed to the base of Q959 which turns off allowing the base of Q957 to rise via R986, Q957 then turns on supplying the regulated 8V.

POWER GOOD AND PROTECTION

IC950 is made up of 4 comparators, the power good line uses comparator 2 . Pin 5 is used as the reference which is held at 2.5V by IC954 supplied by pull up resistor R956. Pin 4 uses R961/R962 and R955/R959 as a potential divider which is connected between the +11V (C957) and T900 winding 12/17 through D959 which is in forward converter mode. In operation this means pin 4 is held below the reference level of pin 5 until the mains supply is interrupted or the set is switched off at which time pin 4 rises above pin 5 and the output pin 2 is pulled low. This low is applied to pin 60 of IC001 via R078. In normal operation pin 2 is held high by pull up resistor R957 from the 5V supply.

The protection line is held high under normal running conditions by R971 from the 5V supply, this high is applied to pin 22 of IC001. When the protection line is pulled low IC001 goes into standby mode, the set can be restarted by the usual methods of bringing the set out of standby, but until the cause of the protection circuit operation is remove the set will return to it's standby state.

The over current for the 26V audio supply uses comparator 1, a reference voltage is set up on pin 6 by resistors R967 and R964. The voltage being compared is fed to pin 7 using the potential divider R968 and R966 which is supplied from the output side of the current sense resistor R974. Should the voltage on pin 7 fall below that of pin 6 pin 1 will be pulled low and thus pulling the protection line low via D958 putting the set into standby.

Comparator 3 is used to protect against a layer short within the F.B.T. it will also act as protection for a short on the secondary outputs of the F.B.T. IC950 is supplied with approximately 26V via D960 to pin 3 from this supply a reference voltage is fed to pin 9 using potential divider R972/R969. Pin 8 is supplied by another potential divider this time made up of four resistors R973/R970 + R730 + R766. R730 + R766 sample the current flowing through Q751 should this increase the voltage drop across R730 + R766 will increase and raise the voltage of pin 8 when it exceeds pin 9 and pin 14 will be pulled low putting the set into standby.

Comparator 4 is used for EHT/over voltage protection, as all the F.B.T. secondary voltages are proportional the 200V supply to the CRT base is used to generate the voltage to be used in comparison, this is done by using a potential divider made up of R718, R749 and R719 on all but the 21" chassis this uses only R718 and R749, R719 is a link. ZD717 monitors the voltage at the junction of R718 and R749, if this exceeds 36V the Zener diode conducts applying a high on pin 10 of IC950 this is compared with the reference voltage on pin 11 which also uses the 2.5V set up by IC954. when pin 10 is higher than 2.5V pin 13 is pulled low in turn pulling the protection line low via D957 putting the set into standby.

The L.T. lines are given protection using diodes D962, D963, D969 and D972 these are connected in reverse bias from the protection line to the 18V, 8V, 5V and standby 5V

supplies respectively. Should any of the low voltage lines have a short circuit to ground the protection line will be pulled low causing the set to go into standby.

If the +B or audio supply lines become short circuit to ground before the protection on the secondary of the power supply, the primary over current protection (pin 3 IC900) will operate turning off the drive output from pin 6 IC900.

For models fitted with version 1.S software or later pins 45 and 46 of IC001 should be shorted together. This is for added protection using software. The horizontal pulse applied to pin 45 for OSD/TEXT positioning is sampled and measured by pin 46. The expected waveform will be a square wave with a maximum mark measurement of 20µs and a maximum space measurement of 100µs. If these maximums are exceeded the protection routine will activate.

DEFLECTION STAGES

IC501 generates the deflection output and control pulses.

HORIZONTAL

Pin 40 of IC501 is the horizontal drive output, this requires a pull up resistor to the 8V supply which is R551. The output is then applied to Q701 via R733, FB700 and R707/C736. The collector of Q701 is supplied from the +B via R701 and the primary winding of T702. The secondary of T702 drives the output transistor Q751, the collector of which is supplied from the +B via R735, R751, L700 and the primary of the FBT T701. The emitter of Q751 is connected to ground via R730 and R766 which are sense resistors and used for the protection circuit.

The capacitive divider network of C717 and C708 is used in conjunction with R724, R759, D713 and D714 to supply a line pulse with an amplitude of approximately 8V peak to peak. This pulse is applied to the micro processor IC001 pin 45 via Q005 and IC501 pin 41 via Q508 this is used for phase detection and to generate the sandcastle pulse used to synchronise the colour decoder, delay line and secam decoder.

VERTICAL

The vertical output amplifier IC601 requires a differential input to pins 1 and 2 this is supplied by IC501 from pins 46 and 47. IC601 pin 4 is supplied with 18V from IC602 which is used for general operation, pin 8 is supplied for the 200V rail via R621 and regulated by ZD603 it is also connected to the 27V rail via R617 to keep the voltage on pin 8 higher than pin 4 voltage during the flyback period on 21" models and purely from the 27V supply on all other models. The vertical scan output is between pins 9 and 3 of IC601. Pin 5 is the feedback control and is dependent on the value of resistors R602 and R603. Pin 10 supplies a frame frequency pulse to pin 22 of IC501 this is used for the vertical guard function. The vertical pulse required by the micro processor IC001 is derived from the vertical output via C603, R610 and R611 the resultant waveform is clamped by ZD602 .

EAST-WEST CORRECTION (WITHOUT IC603)

The picture geometry is controlled via the I2C bus, which is accessed by the menus in service mode. Pin 45 of IC501 outputs the parabolic waveform which is input to pin 12 of IC601, the amplified output from pin 11 this is connected to the centre of the diode modulator via R618 and L751. To stabilize the picture geometry during extremes of picture content brilliance the pin 4 output of T701(the abl) is fed back to pin 12 of IC601 via R764 and C744.

EAST-WEST CORRECTION (WITH IC603)

The picture geometry is controlled via the I2C bus, which is accessed by the menus in service mode. Pin 45 of IC501 outputs the parabolic waveform which is input to the gate of the MOSFET IC603 which is used to amplify the parabola. The drain is connected to R618 and the source is connected to ground. In this configuration J252 and J1 are removed which disconnect pins 11 and 12 of IC60. J246 and J247 are inserted connecting the MOSFET to the rest of the circuit.

Microprocessor and Related Circuits

The SAA5296/SAA5297 microprocessor (IC001) controls all the major functions of the television chassis.

The program code for the microprocessor is either stored within the microprocessor (SAA5297) or is stored in the M27C512 EPROM (IC002) (SAA5296).

The 74HCT573 latch (IC003) is used to interface the EPROM to the microprocessor. This device separates address lines A0-A7 from the microprocessor multiplexed address/data outputs AD0-AD7.

The 4016B analogue switch (IC004) is used to connect/disconnect the microprocessor I²C bus to the peripheral I²C bus and the scart I²C bus.

The ST24W16 EEPROM (IC005) is used to store all the TV (service and user) settings required by the microprocessor to control the TV. This device is connected to the microprocessor I²C bus. There is a separate write enable line controlled by the microprocessor to prevent inadvertent writes to the EEPROM. (Pin 67 of IC001).

Power on, standby and IR reception is indicated by the front panel LED. Either a LTL2114 (LED002) or a TLSH2101 (LED001) is fitted. The following table shows the various states of the LED:

LED State	Description
Off	TV switched off
On, dim	TV switched on, normal operation
On, dim, bright flash	TV switched on, normal operation, IR command received
On, bright	TV switched on, standby operation

The PIC-21043SP infra-red receiver (IR001) filters, demodulates and amplifies infra-red signals transmitted by the handset and sends them to the microprocessor for decoding and execution.

The 4-way or 5-way front panel switch (SW001) is connected via a resistor network to an ADC input on the microprocessor for command decoding and execution.

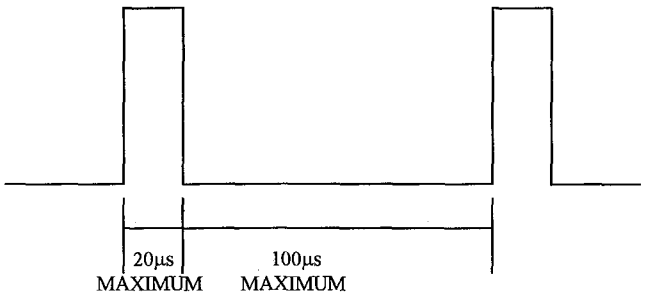

Protection Waveform
to Pin 46 IC001

IC001 SAA5296 Microprocessor Pin Definitions

Pin	Name	I/O	Level	Description
1	MUTE	O	OPEN LOW	Mute left and right audio amplifiers No mute
2	SAV.SW	I	HIGH LOW	SAV3 not connected SAV3 connected
3	KEYS	I	>4.2V 4.0-4.2V 3.3-3.7V 2.7-3.2V 1.3-1.8V 0.9-1.2V 0.7-0.8V <0.7V	No keys pressed MENU key pressed P+ key pressed P- key pressed V+ key pressed V- key pressed V+ and V- keys pressed N/A
4	N/C		0V	
5	AV1.SW	I	>3.1V 1.6-3.1V <1.6V	AV1 connected - 4:3 AV1 connected- 16:9 AV1 not connected
6	AV2.SW	I	>3.1V 1.6-3. IV <1.6V	AV2 connected - 4:3 AV2 connected - 16:9 AV2 not connected
7	AV3.ENA	O	OPEN LOW	AV3 enabled AV2 enabled
8	PANORAMIC	O	HIGH LOW	Panoramic function enabled Panoramic function disabled
9	COMPRESS	O	HIGH LOW	Compress function enabled Compress function disabled
10	N/C		X	
11	N/C		X	
12	V_{SSD}	I	0V	Digital ground
13	EA	I	HIGH LOW	Program memory internal (SAA 5297) Program memory external (SAA 5296)
14	N/C		0V	
15	N/C		0V	
16	N/C		0V	
17	PSEN	O	HIGH LOW	External program memory disable External program memory enable
18	ALE	O	HIGH LOW	External latch enable External latch disable
19	REF-	I	0V	ADC negative voltage reference
20	N/C		0V	
21	N/C		0V	
22	PROTECTION	I	HIGH LOW	PSU OK PSU FAIL
23	N/C		0V	
24	ON/OFF	O	HIGH LOW	PSU OFF PSU ON
25	LED.BRIGHT	O	OPEN LOW	LED DIM LED BRIGHT
26	EXTBLK	O	HIGH LOW	Blanking output for external RGB Normal picture
27	V_{SSA}	I	0V	Analogue ground
28	CVBS0	I	1V p-p	Composite video input for teletext decoding
29	N/C		0V	
30	BLACK	I	-	Video black level storage input
31	IREF	I		Reference current input for analogue circuits
32	A15	O	X	Address line 15 for external EPROM
33	A14	O	X	Address line 14 for external EPROM
34	A13	O	X	Address line 13 for external EPROM
35	A12	O	X	Address line 12 for external EPROM
36	N/C		X	
37	I.C.	I	0V	Digital ground
38	N/C		X	

Pin	Name	I/O	Level	Description
39	RGBREF	I	X	RGB output high level
40	B	O	X	BLUE OSD/text pixel output
41	G	O	X	GREEN OSD/text pixel output
42	R	O	X	RED OSD/text pixel output
43	EXTBLK	O	X	Fast blanking output for OSD/text
44	OSDBRI	O	X	PWM output to control OSD/text brightness
45	HSYNC	I	X	Horizontal sync input for OSD/text synchronisation
46	HSYNC	I	X	Horizontal sync input for OSD/text synchronisation
47	VSYNC	I	X	Vertical sync input for OSD/text synchronisation
48	VSYNC	I	X	Vertical sync input for OSD/text synchronisation
49	V_{DDA}	I	5V	Analogue supply
50	REF+	I	5V	ADC positive reference
51	V_{DDT}	I	5V	Teletext supply
52	A11	O	X	Address line 11 for external EPROM
53	A10	O	X	Address line 10 for external EPROM
54	A9	O	X	Address line 9 for external EPROM
55	A8	O	X	Address line 8 for external EPROM
56	OSCGND	O	0V	Crystal oscillator ground
57	XTALIN	I	X	12MHz crsytal oscillator input
58	XTALOUT	O	X	12MHz crsytal oscillator output
59	RESET	I	HIGH LOW	Reset microprocessor Normal operation
60	PWRGD	I	HIGH LOW	PSU OK PSU FAIL
61	INT.I²C.ENA	O	HIGH LOW	Enable peripheral I²C bus Disable peripheral I²C bus
62	V_{DDM}	I	5V	Microprocessor supply
63	RC	I	X	Remote control input
64	N/C		X	
65	MIC.SCL	I/O	X	Microprocessor I²C bus serial clock
66	MIC.SDA	I/O	X	Microprocessor I²C bus serial data
67	E²WE	O	HIGH LOW	EEPROM write disable EEPROM write enable
68	EXT.I²C.ENA	O	OPEN LOW	Disable scart I²C bus Enable scart I²C bus
69	AD0	I/O	X	Multiplexed address/data line 0 for external EEPROM
70	AD1	I/O	X	Multiplexed address/data line 1 for external EEPROM
71	AD2	I/O	X	Multiplexed address/data line 2 for external EEPROM
72	AD3	I/O	X	Multiplexed address/data line 3 for external EEPROM
73	AD4	I/O	X	Multiplexed address/data line 4 for external EEPROM
74	AD5	I/O	X	Multiplexed address/data line 5 for external EEPROM
75	AD6	I/O	X	Multiplexed address/data line 6 for external EEPROM
76	AD7	I/O	X	Multiplexed address/data line 7 for external EEPROM
77	VGA1	I/O	X	TBA
78	VGA2	I/O	X	TBA
79	VGA3	I/O	X	TBA
80	VGA4	I/O	X	TBA

IC002 27C512 EPROM Pin Definitions

Pin	Name	I/O	Level	Description
1	A15	I	X	Address line 15
2	A12	I	X	Address line 12
3	A7	I	X	Address line 7
4	A6	I	X	Address line 6
5	A5	I	X	Address line 5
6	A4	I	X	Address line 4
7	A3	I	X	Address line 3
8	A2	I	X	Address line 2
9	AI	I	X	Address line 1
10	A0	I	X	Address line 0
11	D0	O	X	Data line 0
12	D1	O	X	Data line 1
13	D2	O	X	Data line 2
14	V_{ss}	I	0V	Ground
15	D3	O	X	Data line 3
16	D4	O	X	Data line 4
17	D5	O	X	Data line 5
18	D6	O	X	Data line 6
19	D7	O	X	Data line 7
20	CE	I	HIGH LOW	EPROM in standby mode EPROM in operation mode
21	A10	I	X	Address line 10
22	OE	I	HIGH LOW	D0-D7 outputs high impedance D0-D7 outputs active
23	A11	I	X	Address line 11
24	A9	I	X	Address line 9
25	A8	I	X	Address line 8
26	A13	I	X	Address line 13
27	A14	I	X	Address line 14
28	V_{cc}	I	5V	Supply

IC003 74HCT573 Latch Pin Definitions

Pin	Name	I/O	Level	Description
1	OE	I	0V	Enable outputs A0-A7
2	AD0	I	X	Multiplexed address/data line 0 input
3	AD1	I	X	Multiplexed address/data line 1 input
4	AD2	I	X	Multiplexed address/data line 2 input
5	AD3	I	X	Multiplexed address/data line 3 input
6	AD4	I	X	Multiplexed address/data line 4 input
7	AD5	I	X	Multiplexed address/data line 5 input
8	AD6	I	X	Multiplexed address/data line 6 input
9	AD7	I	X	Multiplexed address/data line 7 input
10	GND	I	0V	Ground
11	LE	I	HIGH LOW	Latch AD0-AD7 inputs to A0-A7 outputs Maintain current A0-A7 output levels
12	A7	O	X	Address line 7 output
13	A6	O	X	Address line 6 outnut
14	A5	O	X	Address line 5 output
15	A4	O	X	Address line 4 output
16	A3	O	X	Address line 3 output
17	A2	O	X	Address line 2 output
18	A1	O	X	Address line 1 output
19	A0	O	X	Address line 0 output
20	V_{cc}	I	5V	Supply

IC004 4016B Analogue Switch Pin Definitions

Pin	Name	I/O	Level	Description
1	INT. SDA	I/O	X	Peripheral I²C bus SDA
2	MIC. SDA	I/O	X	Microprocessor I²C bus SDA
3	MIC.SDA	I/O	X	Microprocessor I²C bus SDA
4	EXT.SDA	I/O	X	Scart I²C bus SDA
5	EXT.SDA.ENA	I	HIGH LOW	Scart I²C bus SDA enable Scart I²C bus SDA disable
6	EXT.SCL.ENA	I	HIGH LOW	Scart I²C bus SCL enable Scart I²C bus SCL disable
7	GND	I	0V	Ground
8	EXT.SCL	I/O	X	Scart I²C bus SCL
9	MIC.SCL	I/O	X	Microprocessor I²C bus SCL
10	MIC.SCL	I/O	X	Microprocessor I²C bus SCL
11	INT.SCL	I/O	X	Peripheral I²C bus SCL
12	INT.SCL.ENA		HIGH LOW	Scart I²C bus SCL enable Scart I²C bus SCL disable
13	INT.SDA.ENA	I	HIGH LOW	Scart I²C bus SDA enable Scart I²C bus SDA disable
14	V_{cc}	I	5V	Supply

IC005 ST24W16 EEPROM Pin Definitions

Pin	Name	I/O	Level	Description
1	N/C		0V	
2	N/C		0V	
3	N/C		0V	
4	GND	I	0V	Ground
5	MIC.SDA	VO	X	Microprocessor I²C bus SDA
6	MIC.SCL	I/O	X	Microprocessor I²C bus SCL
7	E²WE	I	HIGH LOW	EEPROM write disable EEPROM write enable
8	V_{cc}	I	5V	Supply

IR001 PIC-21043SP Infra-Red Receiver Pin Definitions

Pin	Name	I/O	Level	Description
1	RC	O	X	Remote control data output
2	V_{cc}	I	5V	Supply
3	GND	I	0V	Ground

TUNER AND IF STAGES

The tuner used is powered from the chassis 5V and 33V supplies, it is controlled by the microprocessor IC001 via I²C bus commands . Pin 1 of the tuner is the AGC input and is connected to pin 54 of IC501 via R200 and R227, which is controlled by the I²C bus and adjusted in the "tuner" option in service mode. Pins 2 and 3 are not connected. Pin 4 is the SCL input. Pin 5 is the SDA input/output. Pin 6 is not connected. Pin 7 is the 5V for the tuner supplied via L200. Pin 8 is not connected. Pin 9 is the tuning voltage which is supplied from the 200V from T701 via R725 and R726 and stabilised by ZD200 and applied to pin 9 through R207. Pins 10 and 11 are the IF outputs which are fed to pins 1 and 2 of CP501 for the video path and pins 1 and 2 of CP202 for the FM audio path. The output from CP501 pins 4 and 5 are then input to IC501 pins 48 and 49, which demodulates the signal and supplies a composite video waveform from pin 6 which is applied to the base of Q500.

CP202 is a parallel sound saw filter, the output from pins 4 and 5 are applied to pins 1 and 2 of IC202. The signal is passed through an internal A.G.C. controlled 3 stage amplifier, to the detector stage of the IC. The A.G.C. stage characteristics are determined by the value of C221 connected to pin 19.

The signal is limited and phase shifted by the tuned circuit of L203 etc., connected to pins 16 and 17 this produces a reference signal used for intercarrier detection. The detected intercarrier (which supplies both FM mono and NICAM FM stereo) signal emerges from pin 7 and is then amplified by Q204. The signal is then applied to IC400 pin 12 for further processing.

CL MODELS ONLY

When used with a SECAM signal IC501 is switched for positive modulation via the I²C bus and is selected in the manual tuning option of the installation menu by choosing either L or L' . For NICAM sound CP202 and IC202 with associated components are used as described previously. For AM sound the output from pin 10 of the tuner is applied to the base of Q200 via R213 and C206 the DC bias on the base of Q200 is set by R212 and R216. Q200 amplifies the signal which is then fed to the base of Q201 via R210. Q201 is a buffer which makes the signal available to CP201.

Pin 9 of IC501 is a switched port controlled via the I²C bus, which is low when system L is selected and high when system L' is selected.

When system L is selected the low is applied to the base of Q203 is in turn allows the collector to stay high because of pull up resistor R218 which also makes the base of Q202 high pulling the collector and pin 1 of CP201 low, this allows the signal to pass from the emitter of Q201 through C207, D203, L201 and C209 before being applied to pin 2 of CP201.

When system L' is selected the high is applied to the base of Q203 which then pulls the base of Q202 low as well as the signal path to pin 2 of CP201. The collector of Q202 rises due to pull up resistor R217 and the signal from the emitter of Q201 passes through C207 and D202 to pin 1 of CP201.

The output from CP201 pins 4 and 5 are input to pins 1 and 16 of IC201 which is an AM demodulator. The AM audio pin is obtained for pin 6 which is fed via C411 to pin 29 of IC400 for further processing.

EXTERNAL VIDEO INPUT/OUTPUT

The majority of the video switching functions are carried out by IC501 which is controlled by the I²C bus.

The composite video at the emitter of Q500 is fed via R310 to pin 19 of E302 (scart 1) which is available for use by appropriately connected equipment. The signals being received by the tuner are output and independent of the picture displayed .

The composite video output from pin 38 is applied to the base of Q505 via R534, the emitter is connected to ground via R530. The collector is connected to the base of Q506 and also R533 which is a pull up to +8V. The emitter of Q506 is connected to the +8V supply. The collector is connected to R532 and R531 which is connected to the emitter of Q505 at the other end. This network doubles the signal level from 1V to 2V which is fed to pin 19 of E301 (scart 2). The signal from pin 38 IC501 is also applied to Q503 via R526, which is then applied to the micro processor IC001 pin 28 via C001, this is required for the teletext function.

The external video input applied to scart 1 pin 20 is fed to IC501 pin 17 via R115 and C521. Because of the limitations of the number of input ports to IC501 the composite video/ luminance input to scart 2 and the composite video/luminance input to AV3 (phono/SVHS sockets front of chassis) use a common input pin 11. AV2 signals are applied to Q304 via C320 and R335. R351 and R350 set the DC bias point. AV3 signals are applied to Q302 via C332 and R339 . R340 and R338 set the DC bias point, this is deliberately set so Q302 is turned on, the voltage across R337 and R352 keeps Q304 turned off as the emitter is not 0.6V lower than the base. The control of which signal is input is carried out by the micro processor IC001 pin 7, which pulls the base of Q302 low via D302 and R349, allowing the signal fed into AV2 to be processed by IC501.

NOTE

For chassis's fitted with the TDA8844 or TDA8843 type IC501, Q506 is deleted. The values of R531 and C539 altered and the sub panel containing the delay line and SECAM processing IC's is deleted.

EXTERNAL AUDIO INPUT/OUTPUT (56 series +non Dolby 16:9)

All the audio switching is performed within the IC400. The output from pin 47 is fed to E302 (scart 1) pin 1 via C312, R321 and L303. The output from pin 48 is fed to E302 pin 3 via C309 R320 and L302. These are the right and left RF (nicam/A2/mono) outputs respectively which are available to be connected to appropriate external equipment.

The output from pin 57 is fed to E301 (scart 2) pin 1 via C305, R307 and L301. The output from pin 58 is fed to E301 pin 3 via C303, R306 and L300. These are the monitor right and left outputs respectively which are available to be connected to appropriate external equipment.

The AV2 right input to E301 pin 2 is fed via C417 and R414 to pin 36 of IC400. The AV2 left input to E301 pin 6 is fed via C416 and R415 to pin 37 of IC400. The AV1 right input to E302 pin 2 is fed via C414 and R412 to pin 33 of IC400. The AV1 left input to E302 pin 6 is fed via C415 and R413 to pin 34 of IC400.

AV3 inputs applied to the phono sockets front of set fed through buffer stages C315, R326, Q300, C413 and R419 for the left and C316, R329, Q301, C412 and R418 for the right, to pins 32 and 31 of IC400 respectively.

(86 series + Dolby 16:9)

The output from IC 400 pin 47 is fed to E302 (scart 1) pin 1 via C312, R321 and L303. The output from pin 48 is fed to E302 pin 3 via C309, R320 and L302. These are the RF (nicam/A2/mono) right and left outputs respectively which are available to be connected to appropriate external equipment.

The output from pin 63 is fed to E301 (scart 2) pin 1 via E006, C305, R307 and L301. The output from pin 62 is fed to E301 pin 3 via E006, C303, R306 and L300, these are the monitor right and left outputs respectively which are available to be connected to appropriate external equipment.

The output from pin 57 is the surround channel which is supplied to an external amplifier via R4502, L4501, C4504 and E4500.

The output from pin 58 is the centre channel which is supplied to an external amplifier via R4501 , L4500, C4502 and E4500.

The right and left outputs from pins 60 and 61 of IC400 not only go to the on board amplifier but are also fed via R4503, L4502, C4506 and R4504, L4503, C4508 to E4500 for connection to an external amplifier.

The AV2 right input to E301 pin 2 is fed via C417 and R414 to pin 36 of IC400. The AV2 left input to E301 pin 6 is fed via C416 and R415 to pin 37 of IC400. The AV1 right input to E302 pin 2 is fed via C414 and R412 to pin 33 of IC400. The AV1 left input to E302 pin 6 is fed via C415 and R413 to pin 34 of IC400.

AV3 inputs applied to the phono sockets front of set fed through buffer stages C315, R326, Q300, C413 and R419 for the left and C316, R329, Q301, C412 and R418 for the right, to pins 32 and 31 of IC400 respectively.

AUDIO AMPLIFIER

The audio amplifier used on this chassis is the TDA7263M which is a double amplifier with one power supply pin 9. In this application it is used for left and right in all models (on the 86 series Dolby version the left and right can be fed via the phono outputs to an external amplifier).

The outputs from IC400 are applied to pins 1 and 5 of IC4000 via series resistors R4001 and R4002. The outputs are then taken from pins 8 and 10 passed through the DC blocking capacitors C4007 and C4011, the signals pass through E4000 the headphone socket which contains a switch, when no headphones are inserted the signal is applied to the speakers via PL4000. When headphones are inserted the internal speakers are disconnected and the signal passed through resistors R4014 and R4015 prior to being applied to the headphones which require a restricted power output.

Networks R4008/C4008 and R4011/C4010 are for stability whilst networks R4004/R4005/C4005 and R4007/R4009/C4006 are for the feedback control of the IC on pins 2 + 4.

A hardware mute is also employed on this model, this is carried out by pulling pin 3 low with Q4000 via R4006. Under normal working conditions pin 3 is at approximately half the supply voltage.

Q4000 is controlled by the micro processor IC001 via R001.

Dolby Pro-Logic Section

The Yamaha YSS241 is controlled by the Micro-processor via the I²C line (pin 52 & 53). The µ also controls the Reset from (pin 20 IC400 to pin 9 IC450)

The Dolby section uses four outputs from the TDA9875 - IC400

- Word select (WS)- Begins at pin 23 -IC400 to pin 2 of IC453 where it is inverted and emerges at pin 3 it then goes to pin 13 -IC450 -. This signal allows the separation between Left & Right.
- Master clock (SYSCLK) - Begins at pin 21 IC400 and then goes to pin 6 IC450 - This clock is for the Yamaha YSS241 (8.192 MHz).
- Bit Clock (SCK) - begins at pin 22 IC400 and then goes to pin 14 IC450 - for synchronising the I2S data.
- I2S R/L data (SD01) - begins at pin 25 IC400 and then goes to pin 12 IC450- Right/Left data input.

After Dolby processing there are 2 outputs returned to the TDA9875 via the shift registers.

- decoded Right and Left Signals (pin 41 IC450 Digital Format)
- Decoded Centre and surround (pin 40 IC450 Digital Format)
- A bit clock output is also supplied to the shift registers for synchronisation (pin 36 IC450)

PICTURE AND CONTROL ADJUSTMENTS

+B VOLTAGE ADJUSTMENT

(1) AC input voltage = 230V ± 5V/50Hz.

(2) Turn +B voltage VR (VR950) to mid-point (if pre-adjustment not done).

(3) Receive Philips circuit pattern. Switch on chassis and set the brightness and contrast to maximum.

(4) After applying heat run for 1 MIN. or more, turn VR950 gradually and adjust +B (re-check after 30 secs).

Measuring point: +B voltage C958 + side
gnd C958 – side

(5) Set the value of +B voltage to the value shown in the table below.

MODEL	+B VOLTAGE (V)
2156/86	110 V +/- 0.2V
2556/86	152 V +/- 0.2V
2856/86 (24/28WIWD)	152 V +/- 0.2V
32W/WD	149 V +/- 0.2V

AFC ALIGNMENT

(1) apply relevant RF signal. (a) CH40 UK (b) CH05 EXPORT

(2) on dual o/ multistandard receivers select BG standard.

(3) Enter frequency on CTV controls to ensure AFC loop is off.

(4) Select A.F.C. using service tuner option menu by pressing volume up or down buttons.

● Export

(1) Apply L' standard RF signal.

(2) Enter frequency on CTV controls.

(3) Select "L' I.F A.F.C." using service tuner option menu by pressing volume up or down buttons.

Sound AFC ALIGNMENT

To set L203 first the IF must be set as current A7 spec then:-

(1) Tune to appropriate channel for each model number (channel should have NICAM or A2 sound)

(2) Turn L203 clockwise until noise signal present on scope

(3) Turn L203 slowly anticlockwise until no noise appears on signal

(4) Then add a 180° turn in anticlockwise direction (a clean fixed signal must be seen)

(5) This point is now the set point

(6) To check correct set point has been achieved turn L203 through 180° first in anticlockwise direction checking for the fixed noise free signal then return to the set point. Next turn in a clockwise direction 180° checking for the fixed noise free signal then return to set point

(7) The signal should now be locked to constant tone

(8) Change channel to appropriate program +1 then back to appropriate program the NICAM symbol should appear (or tone signals for non nicam sets)

AGC ALIGNMENT

(1) With the signal received, apply heat run for more than two minutes to avoid the influence of circuit temperature drift.

(2) Connect a voltmeter of at least 100K internal resistance to the A.G.C. terminal of the tuner.

(3) Receive the channel below.

(4) Adjust A.G.C. using the service A.G.C. option in the menu until the following voltage is obtained.

Receive signal		Voltage setting	Setting
Freq	Level	(V)	
C40	+60dBuV	3.3+/-0. IV	UK
C40	+60dBuV	2.8+/- 0.1V	EXPORT 56
C40	+60dBuV	3+/-0.IV	EXPORT 86/ 16:9

HORIZONTAL PHASE/VERTICAL CENTRE/VERTICAL AMPLITUDE

(1) Wait 5 minutes minimum after switching on the mains before adjustment.
(2) Receive the Philips circle pattern.
(3) Set brightness and contrast to maximum.
(4) The set should face North or South.
(5) AC input should be 230V ± 5V 50Hz.
(6) Adjust software control (using PC/HAND SET)
(7) Adjust control so that the centre of the picture is as in the diagram below.

	Upper: Extends Lower: Shrinks	Standard	Upper: Shrinks Lower: Extends
Picture Condition			
Size	Adjust until upper part of castillations disappear.	Adjust until both sides of castillations disappear.	Adjust until lower part of castillations disappear.

FOCUS ADJUSTMENT

(1) Receive the Philips circle pattern.
(2) Adjust after horizontal/vertical has been adjusted.
(3) Switch the received signal to the cross hatch signal.

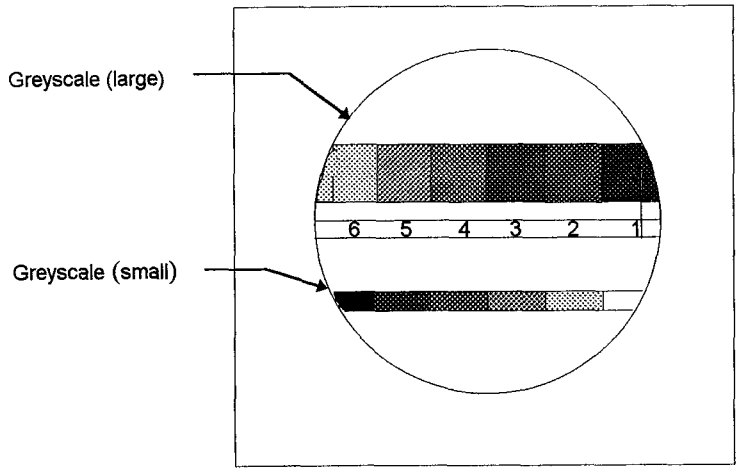

(4) Turn the focus VR gradually clockwise from the full counter clockwise position so that the focus of the vertical line in the centre part, furthest to the right is adjusted for best result (contrast - maximum, brightness - normal).

CUT-OFF ADJUSTMENT (use 100/1 scope probe)

(1) Rough adjustment.
  (1.1) Set to video mode with no signal.
  (1.2) Turn screen pot of FBT until FBT lines disappear.
(2) Fine adjustment (56, 86 usingTDA8375*)
  (2.1) Change to AV mode no signal is required.
  (2.2) Connect probe to CRT green cathode.
  (2.3) Adjust screen pot until the following is achieved.

(3) Fine adjustment (16/9 set's and set's using TDA884*)

(3.1) Set cathode voltage to

84V (16/9 24" and 4/3 TDA884*) using service menu.

91V (16/9 32" and 16/9 28") using service menu.

(3.2) Change to AV mode no signal is required.

(3.3) Connect probe to CRT green cathode.

(3.4) Adjust screen pot until the following is achieved.

16/9 24" and 4/3 TDA884*
140 V +/- 1V Black

16/9 32" and 28"
150 V +/- 1V Black

WHITE BALANCE ADJUSTMENT

(1) Receive 30% white signal. (Or use generator through AV1, for improved signal)

(2) For 4/3 models High brightness: (set brightness level to > 2.5 cd/m^2)

For 16/9 models High brightness: (set brightness level to > 10 cd/m^2)

Adjust RGB gain of TDA8375 (or TDA8844) via I^2C, to give correct colour temp for country code.

PROTECTION CHECKS

POWER GOOD LINE

(1) Set picture to same conditions as above.

(2) Measure pin 1 IC950. Should be HI, if LOW then cut R961.

If HI but no power down timing (see below) then cut R955 (if fitted).

(3) Check power down logic timing (>100mS).

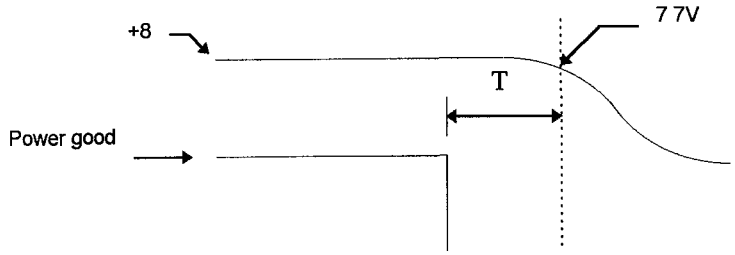

PRIMARY CURRENT LIMIT

(1) In standby apply full load +40%, to the +B & audio rails (dynamic load)

(2) Adjust VR923 until set trips out.

(3) In standby apply full load, +B = 0.6A = 26V = 1.2A +18V (21 inch only) = 0.66A. PSU should not trip.

Loads (for trip)

28/25" +B = 150R +26V = 20R (Resistive)
32" +B = 140R +26V = 20R (Resistive)

21" +B = 170R +18 = 18R (Resistive)

ANODE/FOCUS SHORT-CIRCUIT CHECK

(1) Receive the circle pattern signal.

(2) Set the contrast/brightness to maximum.

(3) Check trip point by measuring voltage drop across R735 (0.7A - 1.2A)

(4) Or alternatively add dc voltage to R730/R766 until set trips. (The dc level should be equivalent to >1.5* (+B current peak value) 1.6 → 2.6 VDC SET **SHOULD** TRIP.

VOLTAGE MEASUREMENTS

IC001							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	0V	21	0V	41**	0V	61	5V
2	5.1V	22	5.1V	42**	0V	62	5V
3	5V	23	0V	43*	0.11V	63	4.8V
4	0V	24	0.1V	44***	2.7V	64	5V
5	0V	25	3.3V	45*	1V	65*	5V
6	0V	26	0.25V	46	2.1	66*	5V
7	5V	27	0V	47	0.18V	67*	5V
8	0V	28	2.4V	48	0.18V	68	0V
9	0V	29	0V	49	5.1V	69*	2.2V
10	5V	30	2. 1V	50	5V	70*	2.6V
11	5V	31	2.5V	51	5.1V	71*	2.1V
12	0V	32*		52*	1.9V	72*	2V
13	0V	33*		53*	1.5V	73*	2.2V
14	0V	34*	1.4V	54*	3.1V	74*	2.7V
15	0V	35*	2.1V	55*	3.2V	75*	2.1V
16	0V	36	0V	56	0V	76*	2V
17*	2.5V	37	0V	57	2.4V	77	1.3V
18*	1.6V	38	1.4V	58	2.6V	78	1.6V
19	0V	39	2.1V	59	0V	79	1.2V
20	0V	40**	0V	60	5.1V	80	1.2V

* DIGITAL WAVEFORM 5V P.P
** DIGITAL WAVEFORM 2V P.P
*** DIGITAL WAVEFORM 4V P.P

IC002							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	4.9V	9	2.5V	17	1.8V	25	0V
2	4.9V	10	2.6V	18	1.9V	26	2.2V
3	0V	11	2.1V	19	1.9V	27	2.6V
4	0V	12	2.3V	20	1.8V	28	0V
5	1.7V	13	1.6V	21	1.2V	29	0V
6	0.4V	14	1.5V	22	0V	30	4.9V
7	1.3V	15	1.5V	23	2.3V	31	4.9V
8	3.6V	16	0V	24	2.4V	32	4.9V

IC003							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	0V	6*	2V	11****	1.65V	16*	2.6V
2*	1.9V	7*	2.2V	12*	2.8V	17*	2.7V
3*	2V	8*	2.2V	13*	2.5V	18*	3.1V
4*	2.7V	9*	2.4V	14*	2.2V	19*	2.3V
5*	1.6V	10	0V	15*	3.5V	20	5V

* DIGITAL WAVEFORM 5V P.P
**** DIGITAL WAVEFORM 5V P.P

IC004			
PIN	VOLTAGE	PIN	VOLTAGE
1	0V	8	0V
2	0V	9	0V
3	0V	10	0V
4	0V	11	0V
5	4.9V	12	4.9V
6	4.9V	13	4.9V
7	0V	14	4.9V

IC005			
PIN	VOLTAGE	PIN	VOLTAGE
1	0V	5	0V
2	0V	6	0V
3	0V	7	4.9V
4	0V	8	4.9V

IC201							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	1.8V	5	1.9V	9	0V	13	0V
2	0V	6	1.9V	10	0V	14	7.8V
3	2.4V	7	0V	11	N/C	15	0V
4	4.3V	8	N/C	12	N/C	16	1.8V

IC202			
PIN	VOLTAGE	PIN	VOLTAGE
1	3.3V	11	2.6V
2	3.3V	12	2V
3	0.3V	13	1.9V
4	0.2V	14	1.9V
5	3.1V	15	6V
6	1.8V	16	2.8V
7	2.2V	17	2.8V
8	0.1	18	1V
9	1.9V	19	3V
10	1.5V	20	7.6V

IC400							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	0V	17	2.4V	33	2.4V	49	0V
2	0V	18	3.5V	34	2.4V	50	0V
3	0V	19	3.5V	35	0V	51	2.4V
4	4.8V	20	4.8V	36	2.4V	52	2.4V
5	4.8V	21	1.5V	37	2.4V	53	2.4V
6	0V	22	4.8V	38	4.9V	54	2.4V
7	4.8V	23	4.8V	39	4.9V	55	2.4V
8	2.3V	24		40	0V	56	0V
9	4.9V	25	0V	41	2.4V	57	2.4V
10	2.3V	26	4.8V	42	1.7V	58	2.4V
11	2.4V	27	4.8V	43	0V	59	4.9V
12	2.4V	28	0V	44	2.5V	60	2.4V
13	0V	29	2.4V	45	2.5V	61	2.4V
14	0V	30	0V	46	2.5V	62	2.4V
15	4.8V	31	2.4V	47	2.4V	63	2.4V
16	4.8V	32	2.4V	48	2.4V	64	4.9V

IC501							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	1.8V	15	3.1V	29	2.3V	43	3.9V
2	3.8V	16	0V	30	2.3V	44	0V
3	3.7V	17	3.4V	31	1.4V	45	2.7V
4	3.7V	18	7.7V	32	1.4V	46	2.2V
5	2.8V	19	2.8V	33	0.2V	47	2.2V
6	3.3V	20	2.7V	34	2.4V	48	4.5V
7	4.8V	21	2.7V	35	2.5V	49	4.5V
8	4.8V	22	2.6V	36	4.9V	50	1.9V
9	6.7V	23	0V	37	7.3V	51	3.7V
10	0.4V	24	3.7V	38	2.7V	52	3.9V
11	3.4V	25	3.7V	39	5V	53	3.9V
12	7.5V	26	0.1V	40	2.1V	54	4.4V
13	3.9V	27	0V	41	0.8V	55	2.9V
14	0V	28	2.8V	42	3.2V	56	3.6V

IC502 (ALL MODELS FITTED WITH TDA8375)							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	4.5V	5	0.9V	9	4.5V	13	0V
2	0V	6	0V	10	0V	14	1.3V
3	0V	7	0.8V	11	2.9V	15	0V
4	0V	8	0V	12	2.9V	16	1.3V

IC503 (SECAM MODELS FITTED WITH TDA8375)							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	1.6V	5	N/C	9	1.8V	13	N/C
2	1.1V	6	0V	10	1.8V	14	N/C
3	7.8V	7	3.3V	11	0V	15	0.93V
4	N/C	8	4.2V	12	N/C	16	3.5V

IC601			
PIN	VOLTAGE	PIN	VOLTAGE
1	2.4V	8	*
2	2.3V	9	8.8V
3	8.5V	10	2.2V
4	18.5V	11	0V
5	8.5V	12	2.6V
6	0V	13	0V
7	0V		

* 25"+28" models with a link fitted in R617/D604 position and R621 missing 27V. 21" and 16:9 models with D604 and R621 fitted 49V.

IC602		IC603 (16:9 models)	
PIN	VOLTAGE	PIN	VOLTAGE
INPUT	23V		
REF.	0V		
OUTPUT	18.1V		

IC900			
PIN	VOLTAGE	PIN	VOLTAGE
1	3.3V	5	0V
2	1.8V	6	1.9V
3	0.09V	7	12V
4	1.8V	8	5V

IC901			
PIN	VOLTAGE	PIN	VOLTAGE
1	120.4V	4	0V
2	120.4V	5	3.3V
3	0.5V	6	0.4V

IC950			
PIN	VOLTAGE	PIN	VOLTAGE
1	5.1V	8	3.2V
2	4.9V	9	4V
3	26.7V	10	0V
4	0.3V	11	2.4V
5	2.5V	12	0V
6	8.2V	13	5.2V
7	9V	14	4.9V

IC951		IC952		IC953		IC954	
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
INPUT	7.9V	INPUT	10.5V	INPUT	28V	OUTPUT	2.5V
REF.	0.23V	REF.	0V	REF.	0V	REF.	0V
OUTPUT	5.2V	OUTPUT	5V	OUTPUT	18V		

IC4000			
PIN	VOLTAGE	PIN	VOLTAGE
1	1.6V	7	0V
2	1.7V	8	13.8V
3	15V	9	0V
4	1.7V	10	2.4V
5	1.7V	11	0V
6	0V		

86 SERIES AND 16:9 DOLBY MODELS

IC450							
PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE	PIN	VOLTAGE
1	0V	17	5.1V	33	2.5V	49	5V
2*	2.5V	18	5V	34	2.5V	50	5V
3*	2.5V	19	5V	35*	2.5V	51	5V
4*	2.5V	20	5V	36*		52*	4.9V
5	0V	21	5V	37*	5V	53*	4.9V
6*****	2.5V	22	5V	38	1.2V	54	5.1V
7*	2.5V	23	5V	39	1.2V	55	5.1V
8	0V	24	5V	40*	1.3V	56	0V
9	5V	25	5V	41*	5.1V	57	0V
10	5.1V	26	5V	42*	5.1V	58	0V
11*	2.5V	27	5V	43	5.1V	59	0V
12*	1.4V	28	5V	44	5V	60	0V
13*	2.5V	29	5V	45	5.1V	61	0V
14*	2.5V	30	5V	46	5V	62*	5.1V
15	5V	31	5V	47	5V	63*	5.1V
16	5V	32	5V	48	5V	64	5.1V

* DIGITAL WAVEFORM 5V P.P.
***** DIGITAL WAVEFORM 6V P.P.

IC453			
PIN	VOLTAGE	PIN	VOLTAGE
1	5.1V	8	0V
2*	2.5V	9	5.1V
3*	2.5V	10	5.1V
4	0V	11*	2.5V
5	0V	12*	2.4V
6	5.1V	13	5.1V
7	0V	14	5.1V

* DIGITAL WAVEFORM 5V P.P.

IC454			
PIN	VOLTAGE	PIN	VOLTAGE
1*	2.1V	8*	1.3V
2	0V	9*	1.3V
3*	2.5V	10*	1.3V
4*	1.3V	11*	1.3V
5*	1.3V	12*	1.3V
6*	1.3V	13	1.3V
7	0V	14	5.1V

* DIGITAL WAVEFORM 5V P.P.

IC455			
PIN	VOLTAGE	PIN	VOLTAGE
1*	1.2V	8*	1.2V
2	0V	9*	1.2V
3*	2.5V	10*	1.2V
4*	1.2V	11*	1.2V
5*	1.2V	12*	1.2V
6*	1.2V	13*	1.2V
7	0V	14	5.1V

* DIGITAL WAVEFORM 5V P.P.

IC456 + IC457			
PIN	VOLTAGE	PIN	VOLTAGE
1	0V	8*	1.2V
2	0V	9	N/C
3*	2.5V	10*	1.2V
4*	1.2V	11*	1.2V
5*	1.2V	12*	1.2V
6*	1.2V	13	0V
7	0V	14	5.1V

* DIGITAL WAVEFORM 5V P.P.

CRN	B	C	E
Q1	2.7V	5.1V	2V
Q003	-0.25V	5.1V	0.2V
Q004	0.1V	5.1V	0.07V
Q005	1.4V	5.1V	0.98V
Q202*	0V	3.2V	0V
Q202**	3.2V	0V	0V
Q203*	4.4V	0V	0V
Q203**	0V	3.2V	0V
Q204	1.75V	0V	2.4V
Q304	2.5V	7.8V	4.2V
(1)Q4000	0.1V	15.2V	0V
Q500	3.2V	7.6V	2.6V
Q503	3.5V	7.8V	2.9V
Q505	3.5V	7.1V	2.9V
Q506	7.1V	5.7V	7.9V
Q508	1.7V	7.8V	1.6V
Q701	-0.98V	28.5V	-0.22V
(2)Q703	2.3V	18.1V	1.7V
(3)Q751	0.28V		0.3V
(4)Q801	7.8V	142V	7.3V
(4)Q802	7.8V	138V	7.3V
(4)Q803	7.8V	140V	7.3V
(4)Q804	137V	9V	135V
(4)Q805	139V	8.9V	137V
(4)Q806	142V	9V	140V
(4)Q811	3.3V	7.3V	2.5V
(4)Q812	3.3V	7.3V	2.7V
(4)Q813	3.3V	7.3V	2.6V
(4)Q814	138V	187V	137V
(4)Q815	136V	187V	135V
(4)Q816	141V	187V	139V

CRN	G	D	S
Q901	2.4V	10.4V	0.26V
CRN	B	C	E
Q902	2.5V	0V	0.02V
(5)Q903	10.1V		10.3V
Q905	4.5V	64V	12V
Q906	0.67V	0.08V	0V
Q907	0.02V	0.94V	0V
Q908	0.75V	0.02V	0V
Q950	0.32V	0.8V	0V
Q951	27.4V	28.2V	28V
Q952	0.8V	0.07V	0V
Q954	6.9V	119V	6.3V
Q957	8.6V	11.3V	7.9V
Q959	0.3V	8.5V	0V

* Measured in system L ** Measured in system L'

MEASUREMENTS MADE USING A FLUKE 77 MULTIMETER.

(1) When hardware mute activated by micro B=0.7V C=0V E=OV

(2) Dependent on picture content and customer control settings. Measurements made with contrast at maximum, brilliance and colour at mid position. Using a circle pattern signal.

(3) Q751 collector waveform approximately 1200v pk.to pk.

(4) C.R.T. base transistor voltages dependent on picture content and customer control settings. Measurements made with contrast at maximum, brilliance and colour set to mid position. Using a circle pattern signal.

(5) Q903 collector waveform approximately 550v pk. to pk

DIAGNOSTIC FLOW CHART

DEFLECTION FAULTS

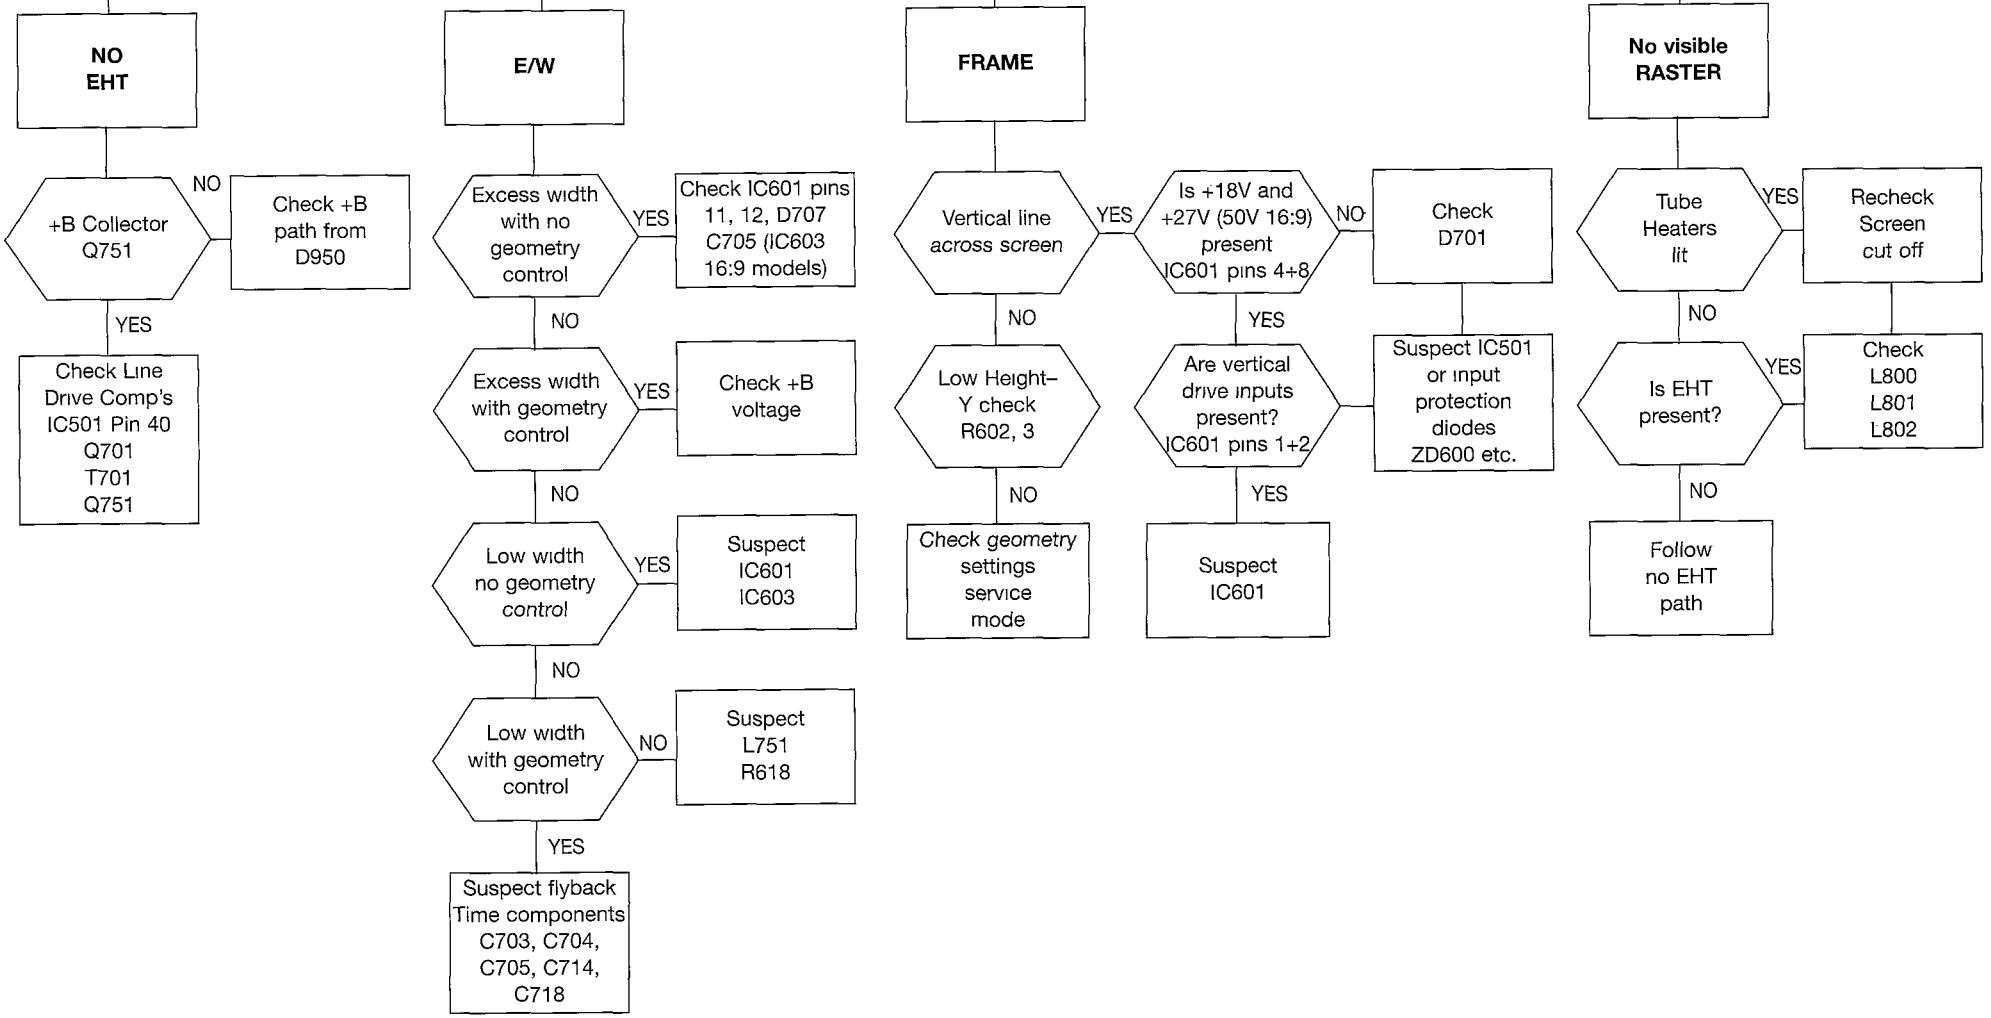

DIAGNOSTIC FLOW CHART

POWER SUPPLY

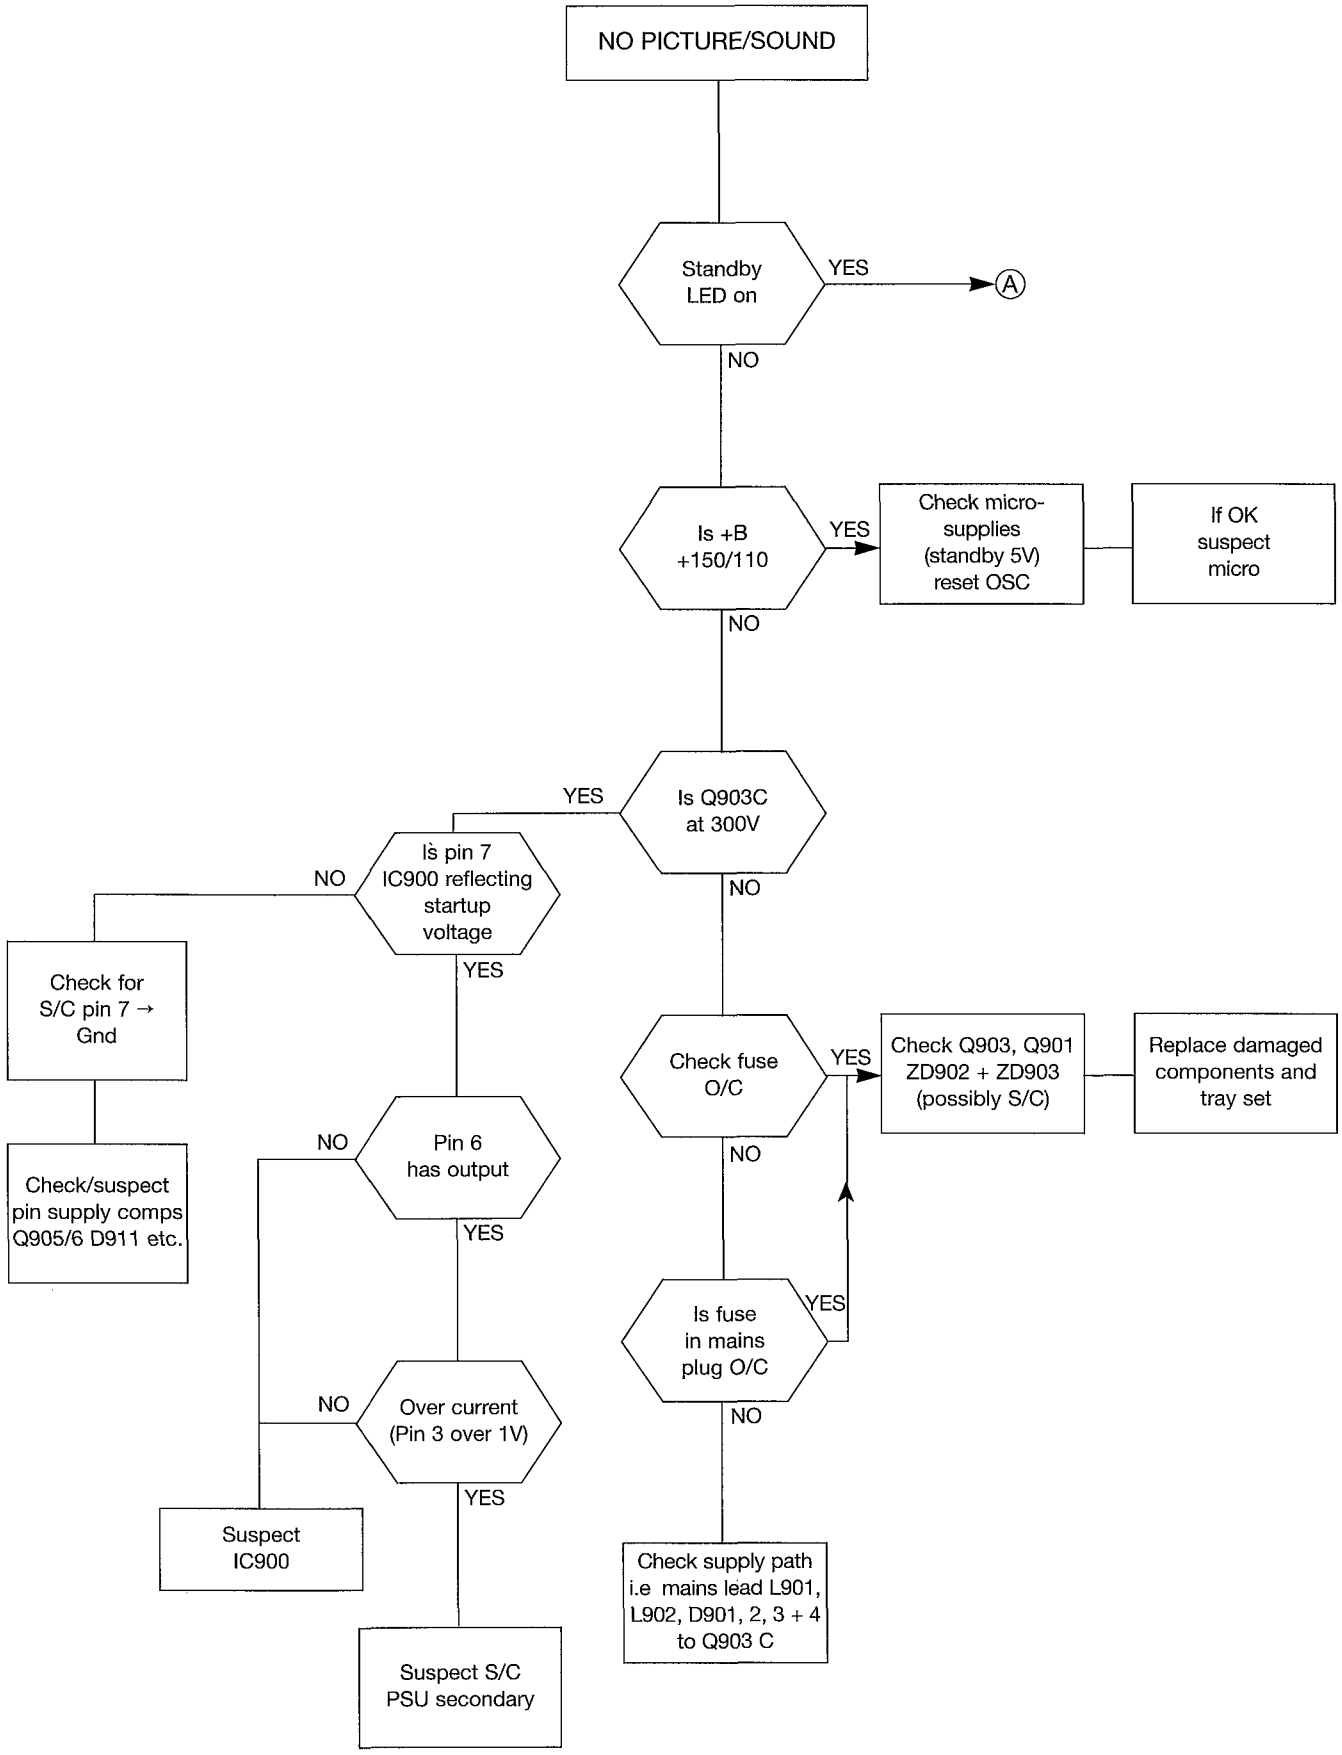

DIAGNOSTIC FLOW CHART

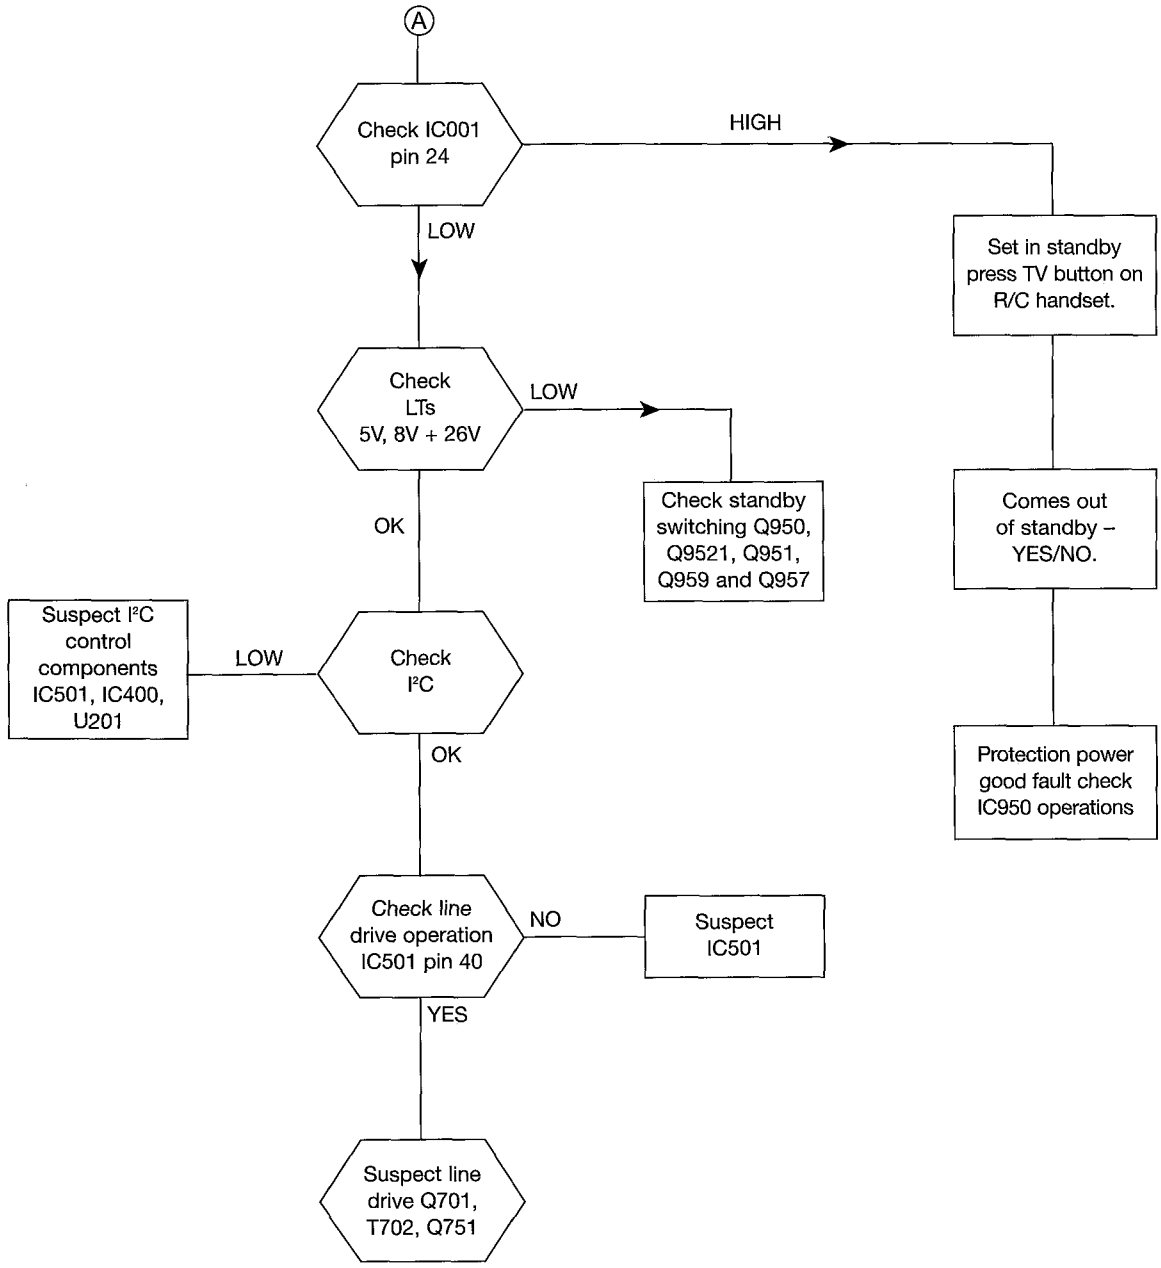

WAVEFORMS

Pin 22 of IC501
If IC501 sees any of the failure waveforms the screen will be blanked by IC501, although the O.S.D. will still be displayed

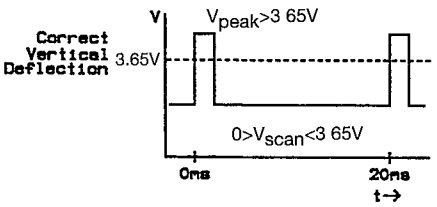

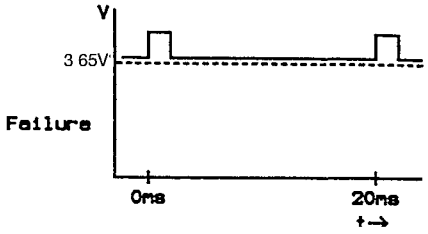

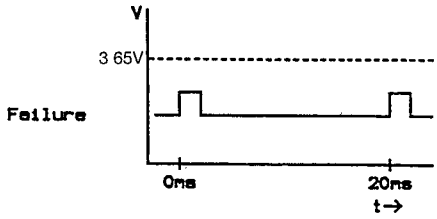

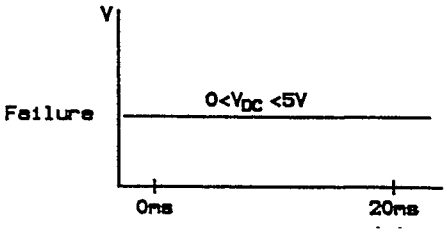

Pin 6 of IC501

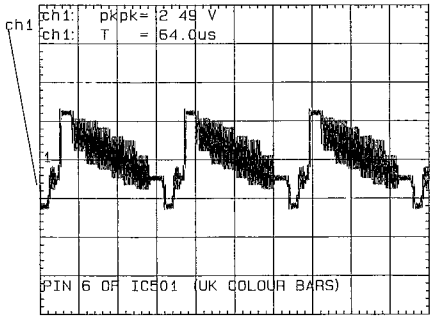

Pin 7 of IC202

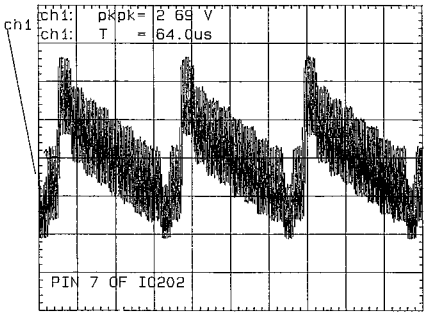

Q903 collector

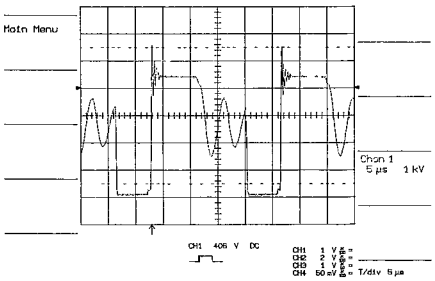

Q901 gate

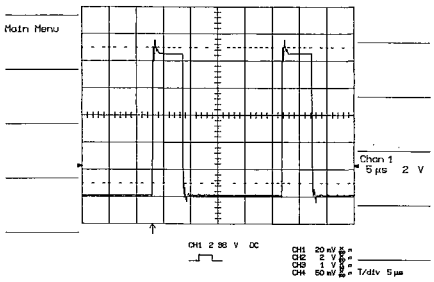

IC900 Pin 4

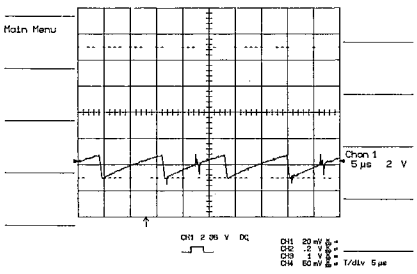

IC501 Pin 41

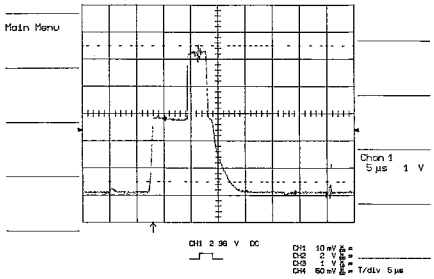

Q757 collector

NO OR SLOW TRIGGER

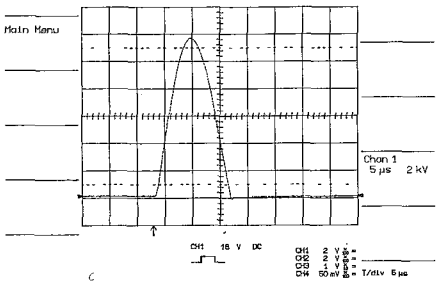

IC501 Pin 18

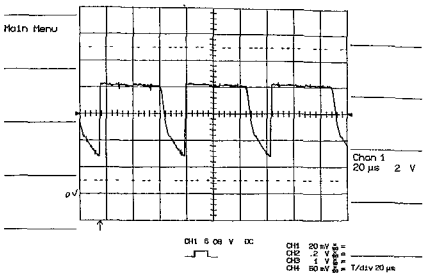

IC501 Pin 28

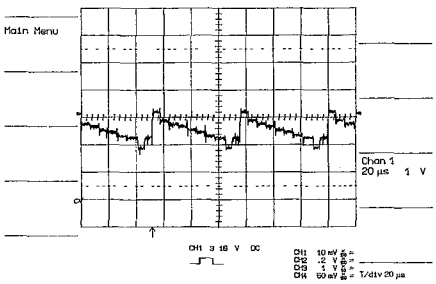

IC501 Pin 13

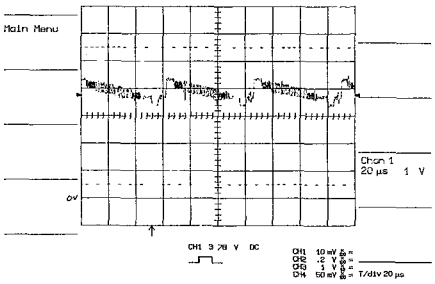

Represents text/O.S.D. levels at anodes of D001, D003 and D004

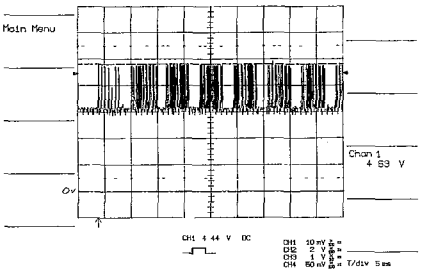

IC501 Pin 22

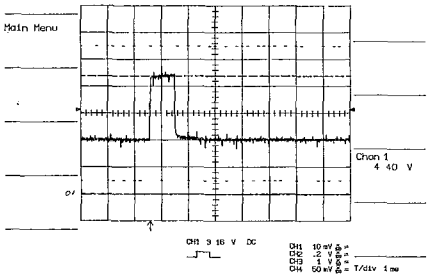

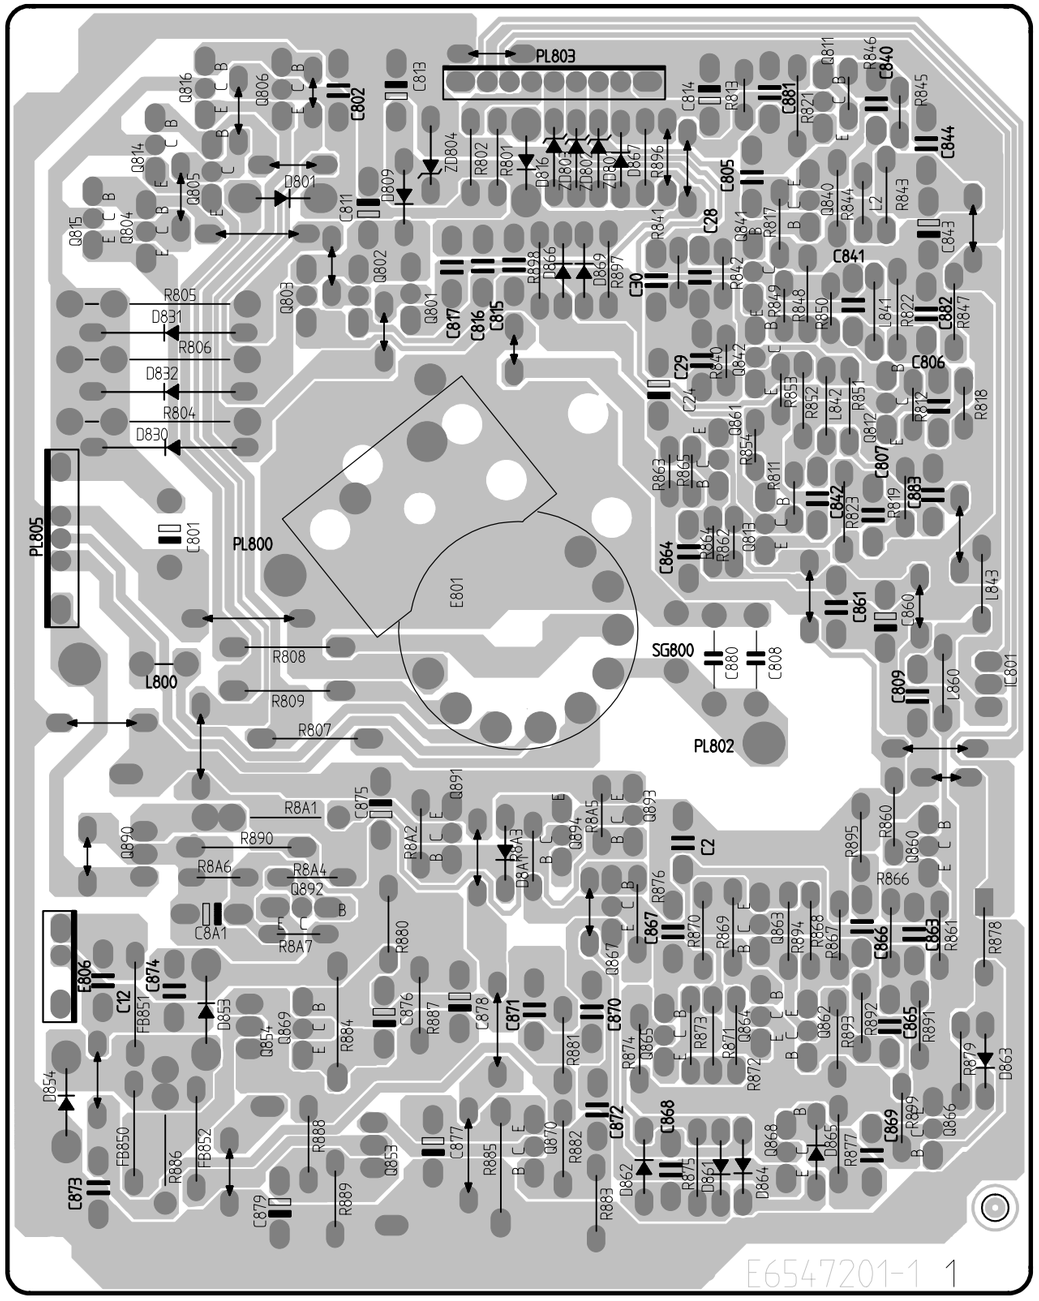
PL803
PL805
PL800
PL802
SG800
L800
E801
C801
C802
C805
C806
C807
C809
C811
C813
C814
C815
C816
C817
C841
C842
C843
C844
C860
C861
C863
C864
C880
C808
L843
L801
R805
R806
R804
R808
R809
R807
R8A1
R890
R8A6
R8A4
R8A7
R880
R884
R887
R888
R889
R886
R885
R883
R882
R881
R870
R871
R872
R873
R874
R876
R878
R879
R861
R860
R895
R866
R867
R868
R869
R894
R893
R892
R891
R865
R847
R848
R849
R850
R851
R852
R853
R854
R855
R856
R857
R858
R859
R862
R863
R864
R818
R819
R821
R822
R823
R896
R897
R898
R899
R8A2
R8A3
R8A5
D830
D831
D832
D801
D802
D803
D804
D805
D806
D807
D808
D809
D810
D811
D812
D813
D814
D815
D816
D817
D818
D819
D820
D821
D822
D823
D824
D825
D826
D827
D828
D829
D833
D834
D835
D836
D837
D838
D839
D840
D841
D842
D843
D844
D845
D846
D847
D848
D849
D850
D851
D852
D853
D854
D855
D856
D857
D858
D859
D860
D861
D862
D863
D864
D865
D866
D867
D868
D869
D870
D871
D872
D873
D874
D875
D876
D877
D878
D879
D880
D881
D882
D883
D884
D885
D886
D887
D888
D889
D890
D891
D892
D893
D894
D895
D896
D897
D898
D899
Q801
Q802
Q803
Q804
Q805
Q806
Q807
Q808
Q809
Q810
Q811
Q812
Q813
Q814
Q815
Q816
Q817
Q818
Q819
Q820
Q821
Q822
Q823
Q824
Q825
Q826
Q827
Q828
Q829
Q830
Q831
Q832
Q833
Q834
Q835
Q836
Q837
Q838
Q839
Q840
Q841
Q842
Q843
Q844
Q845
Q846
Q847
Q848
Q849
Q850
Q851
Q852
Q853
Q854
Q855
Q856
Q857
Q858
Q859
Q860
Q861
Q862
Q863
Q864
Q865
Q866
Q867
Q868
Q869
Q870
Q871
Q872
Q873
Q874
Q875
Q876
Q877
Q878
Q879
Q880
Q881
Q882
Q883
Q884
Q885
Q886
Q887
Q888
Q889
Q890
Q891
Q892
Q893
Q894
Q895
Q896
Q897
Q898
Q899
E6547201-1 1

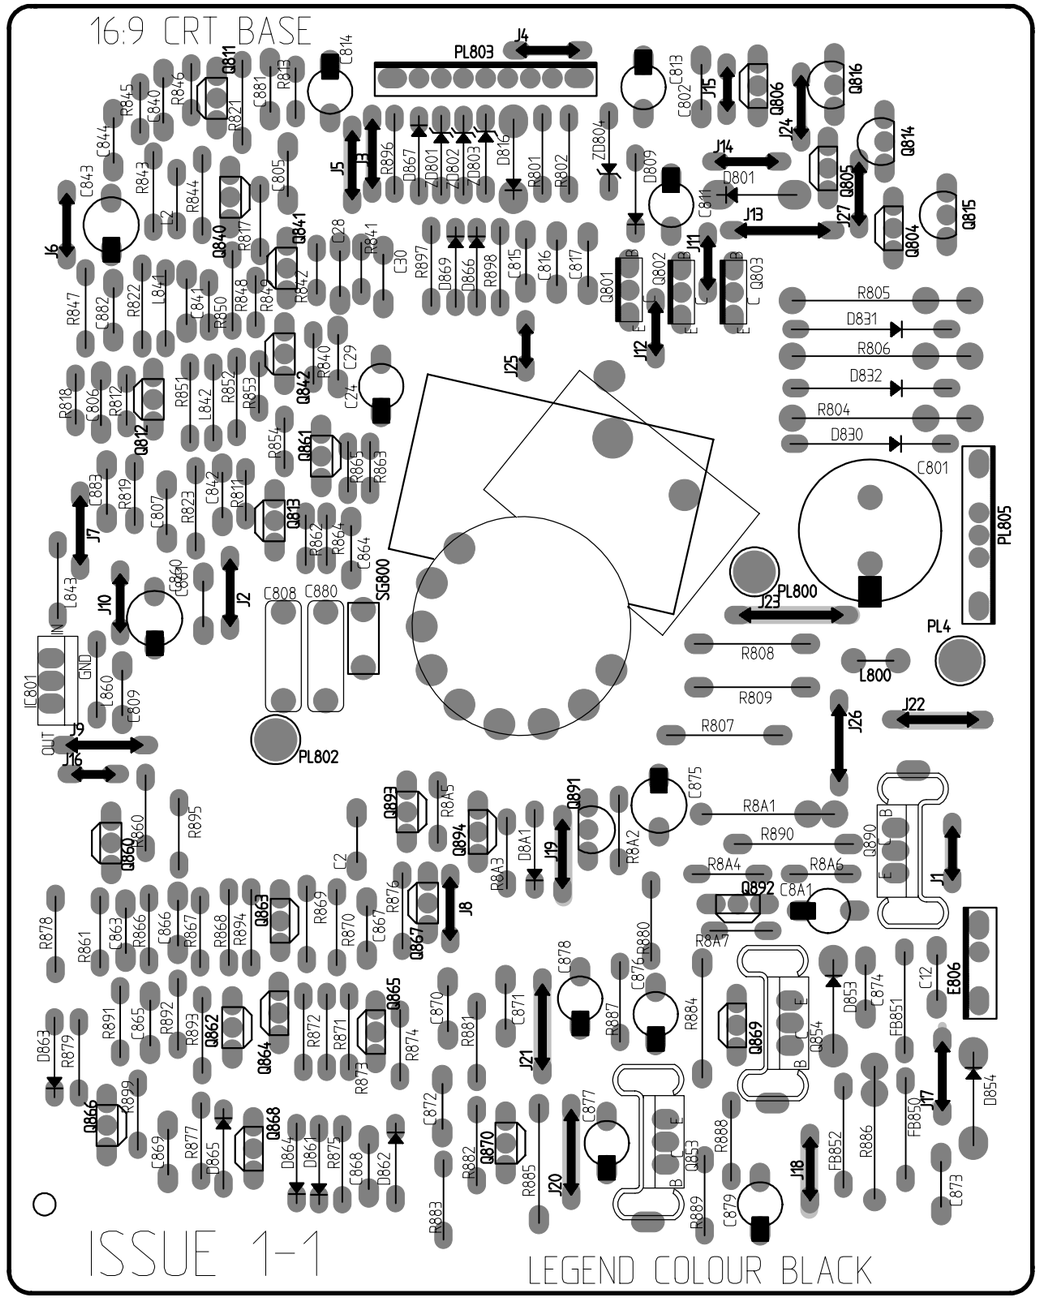
16:9 CRT BASE
PL803
PL805
PL800
PL802
PL4
SG800
L800
C801
J1
J2
J3
J4
J5
J6
J7
J8
J9
J10
J11
J12
J13
J14
J15
J16
J17
J18
J19
J20
J21
J22
J23
J24
J25
J26
J27
IC801
IN
GND
OUT
R805
R806
R804
R808
R809
R807
R8A1
R890
R8A4
R8A6
R8A7
R886
R885
R883
R882
R881
R870
R871
R872
R873
R874
R876
R878
R879
R861
R860
R895
R866
R867
R868
R869
R894
R893
R892
R891
R865
R847
R848
R849
R850
R851
R852
R853
R854
R855
R856
R857
R858
R859
R862
R863
R864
R818
R819
R821
R822
R823
R896
R897
R898
R899
R8A2
R8A3
R8A5
D830
D831
D832
D801
D802
D803
D804
D805
D806
D807
D808
D809
D810
D811
D812
D813
D814
D815
D816
D817
D818
D819
D820
D821
D822
D823
D824
D825
D826
D827
D828
D829
D833
D834
D835
D836
D837
D838
D839
D840
D841
D842
D843
D844
D845
D846
D847
D848
D849
D850
D851
D852
D853
D854
D855
D856
D857
D858
D859
D860
D861
D862
D863
D864
D865
D866
D867
D868
D869
D870
D871
D872
D873
D874
D875
D876
D877
D878
D879
D880
D881
D882
D883
D884
D885
D886
D887
D888
D889
D890
D891
D892
D893
D894
D895
D896
D897
D898
D899
Q801
Q802
Q803
Q804
Q805
Q806
Q807
Q808
Q809
Q810
Q811
Q812
Q813
Q814
Q815
Q816
Q817
Q818
Q819
Q820
Q821
Q822
Q823
Q824
Q825
Q826
Q827
Q828
Q829
Q830
Q831
Q832
Q833
Q834
Q835
Q836
Q837
Q838
Q839
Q840
Q841
Q842
Q843
Q844
Q845
Q846
Q847
Q848
Q849
Q850
Q851
Q852
Q853
Q854
Q855
Q856
Q857
Q858
Q859
Q860
Q861
Q862
Q863
Q864
Q865
Q866
Q867
Q868
Q869
Q870
Q871
Q872
Q873
Q874
Q875
Q876
Q877
Q878
Q879
Q880
Q881
Q882
Q883
Q884
Q885
Q886
Q887
Q888
Q889
Q890
Q891
Q892
Q893
Q894
Q895
Q896
Q897
Q898
Q899
ISSUE 1-1
LEGEND COLOUR BLACK

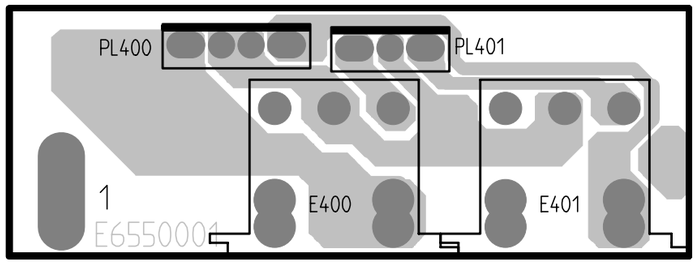

Solder Side

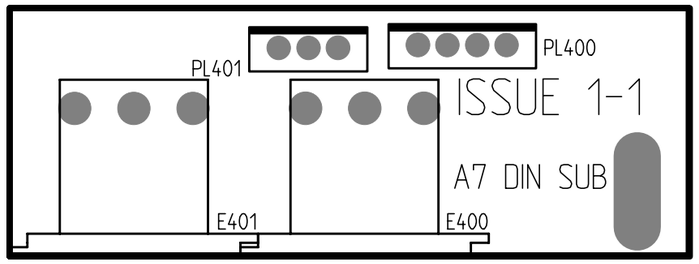

Component Side

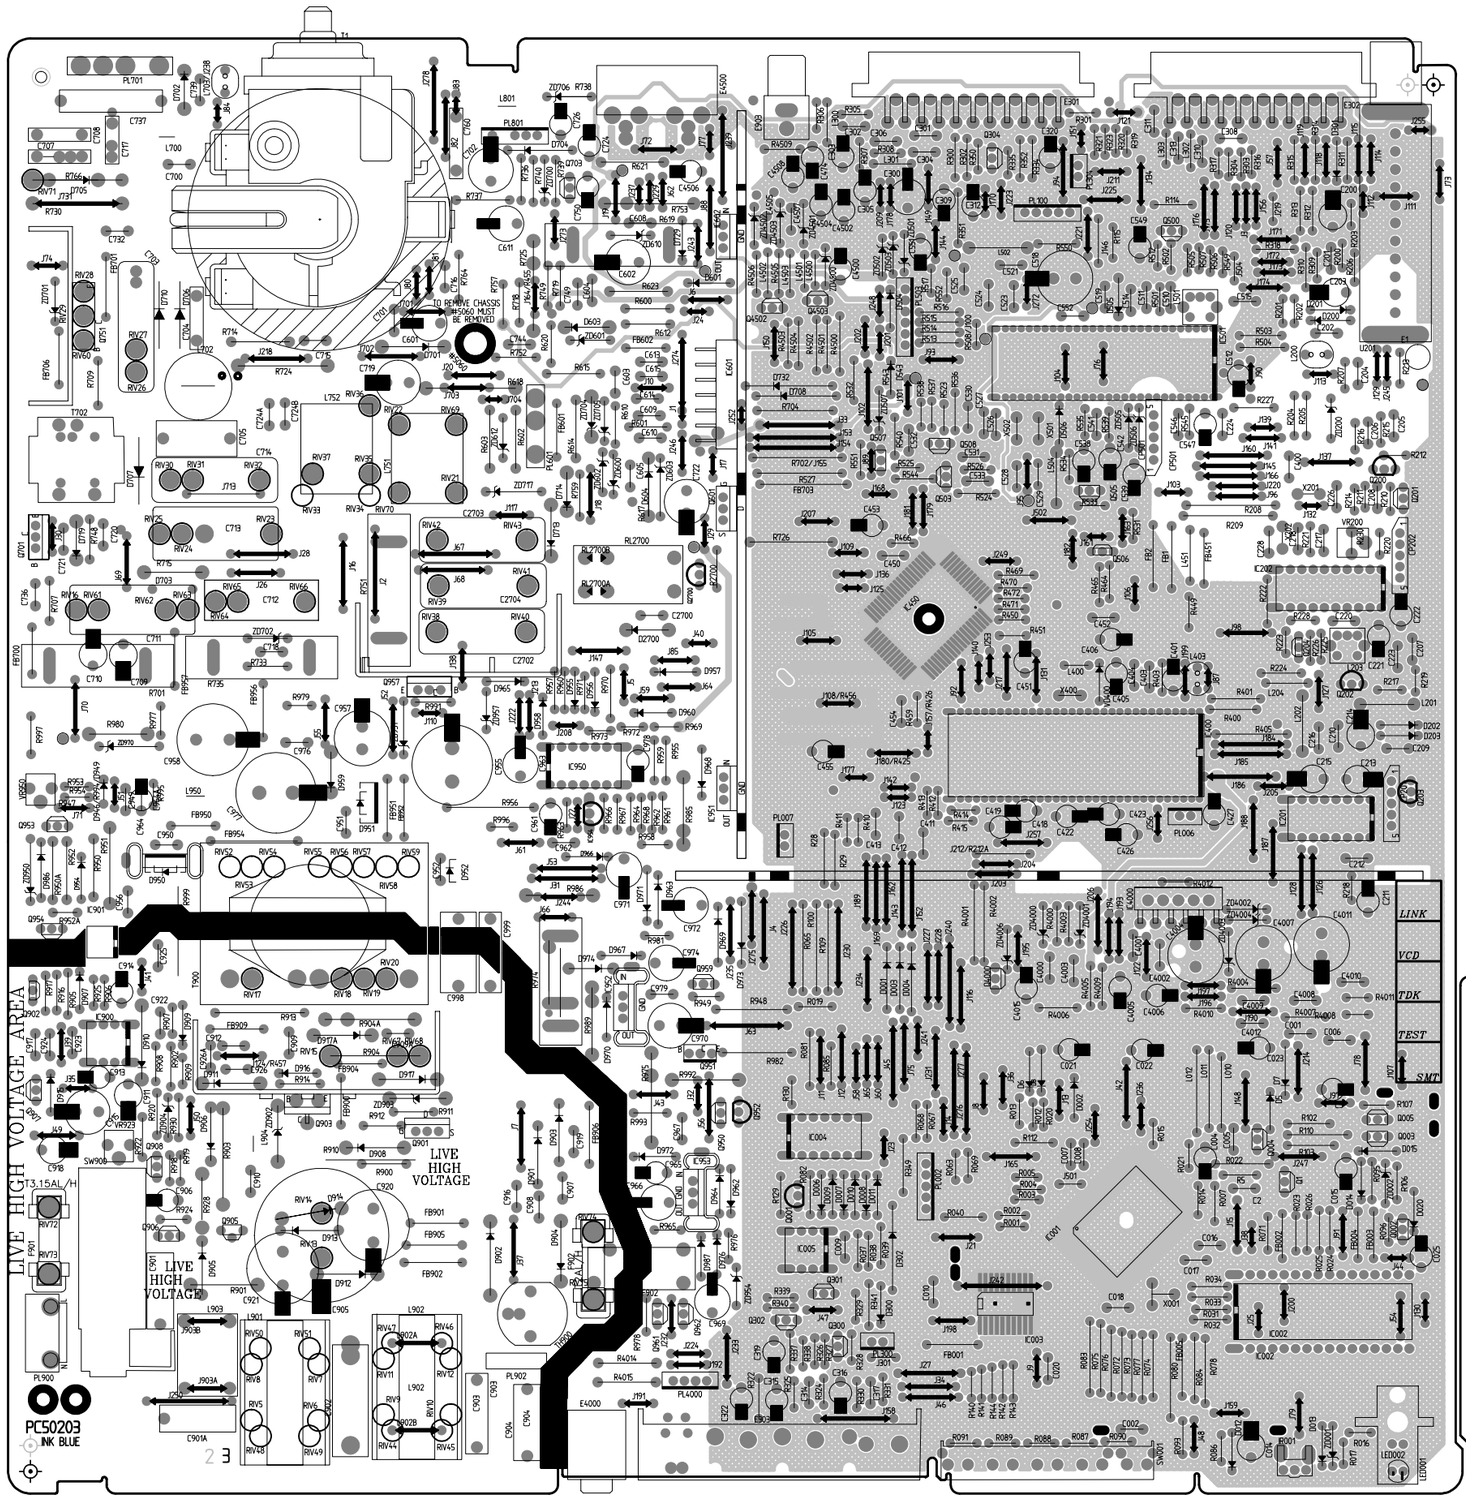

CRT BASE PCB

THIS CRT BASE PCB IS NOT USED IN SOME MODELS
- REFER TO PARTS LIST

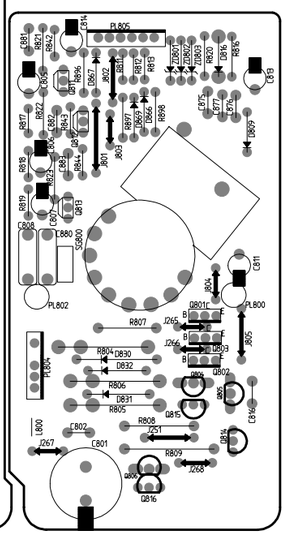

CRT BASE PCB

THIS CRT BASE PCB IS NOT
USED IN SOME MODELS
- REFER TO PARTS LIST

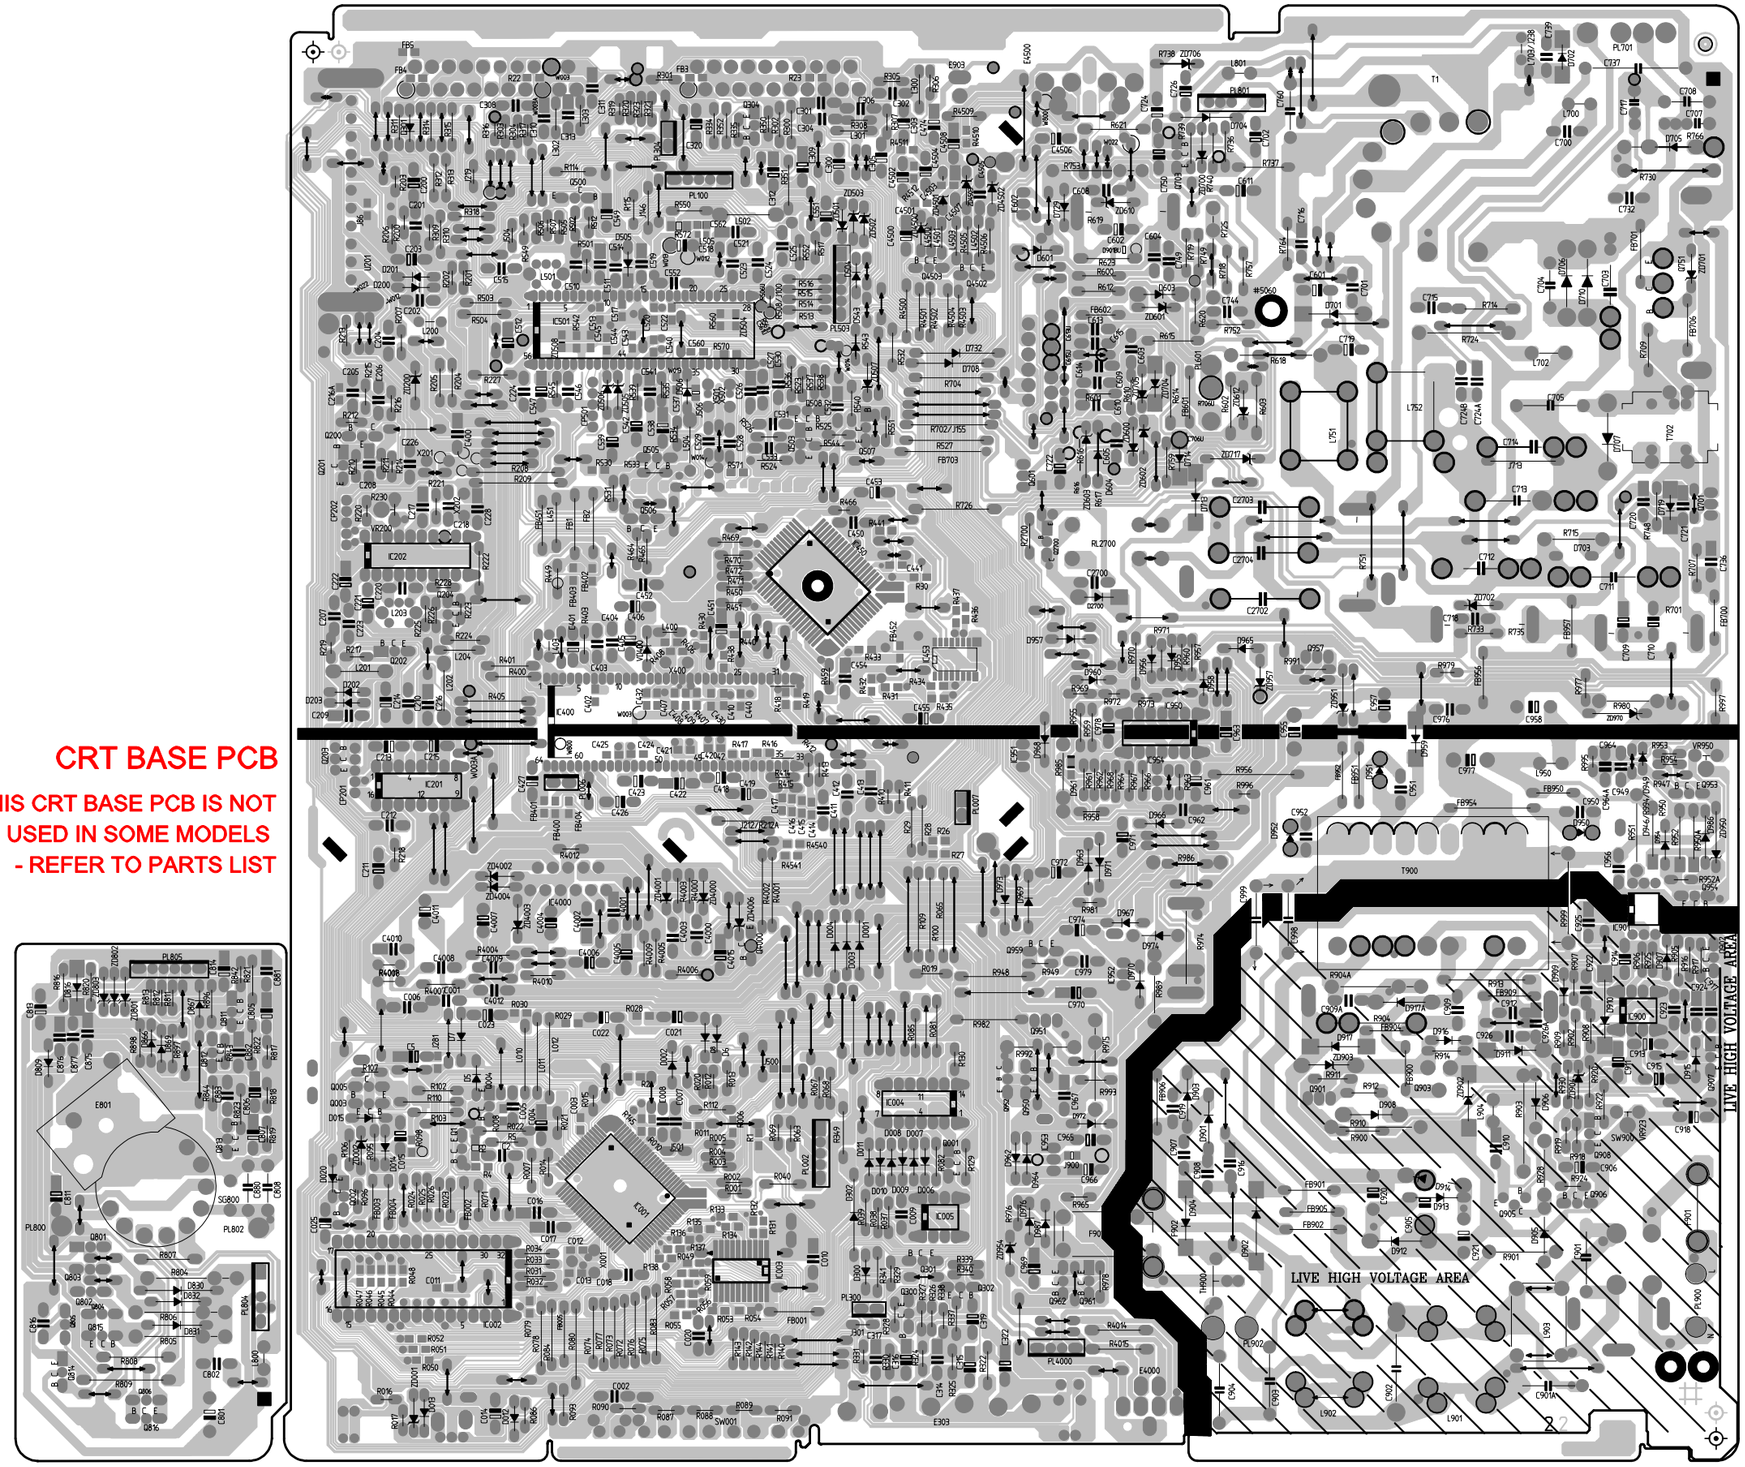

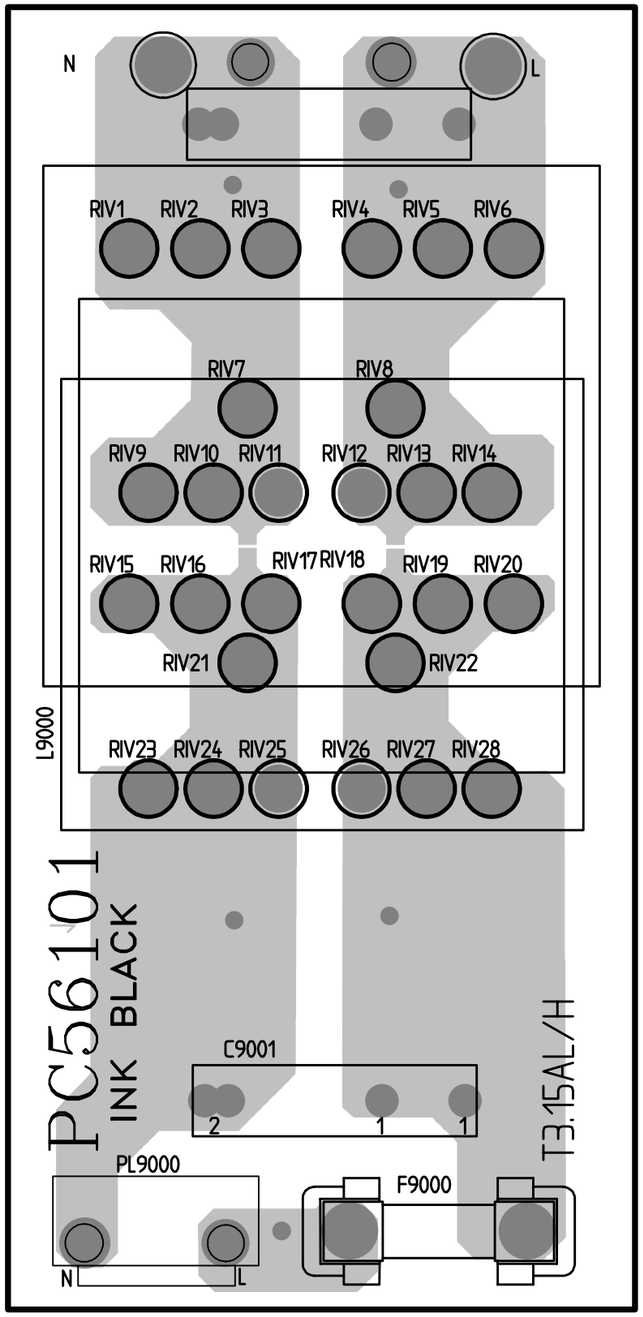
N
L
RIV1
RIV2
RIV3
RIV4
RIV5
RIV6
RIV7
RIV8
RIV9
RIV10
RIV11
RIV12
RIV13
RIV14
RIV15
RIV16
RIV17
RIV18
RIV19
RIV20
RIV21
RIV22
L9000
RIV23
RIV24
RIV25
RIV26
RIV27
RIV28
PC56101
INK BLACK
C9001
2
1
1
T3.15AL/H
PL9000
F9000
N
L

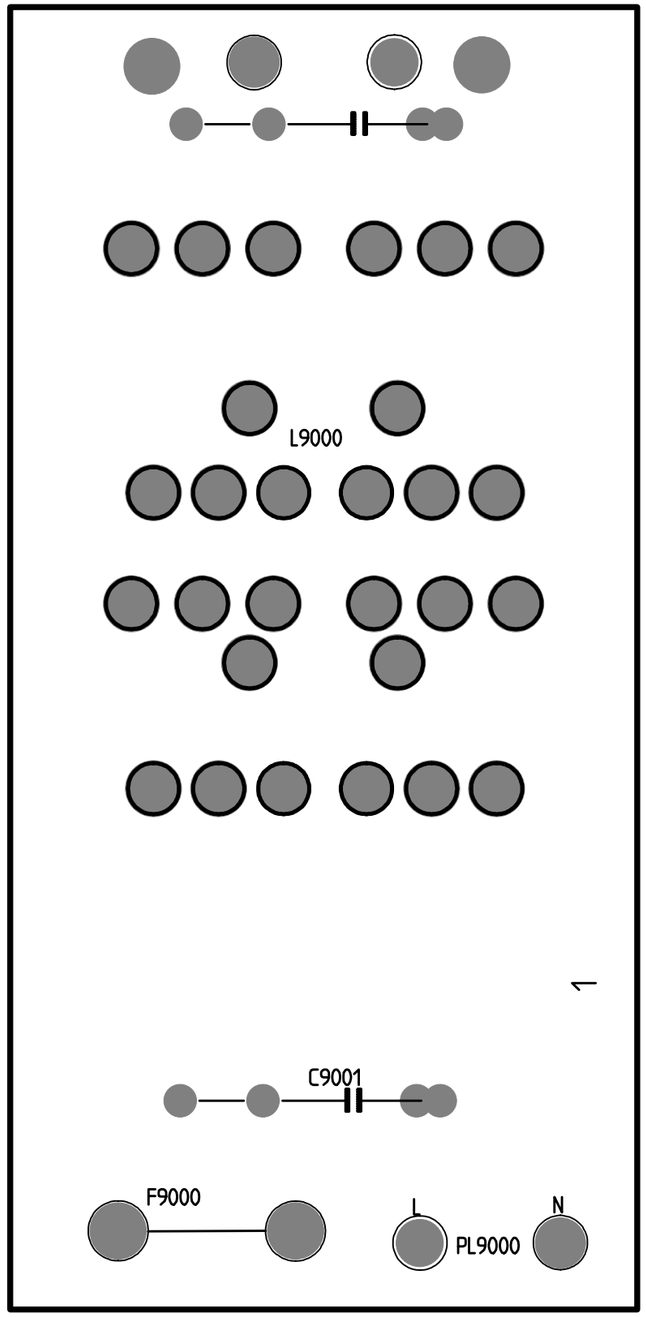
L9000
1
C9001
F9000
L
N
PL9000

NOTE:
DEVICES COLOURED RED HAVE A VARIABLE SPEC. AND MAY NOT BE FITTED IN THIS MODEL - REFER TO THE PARTS LIST

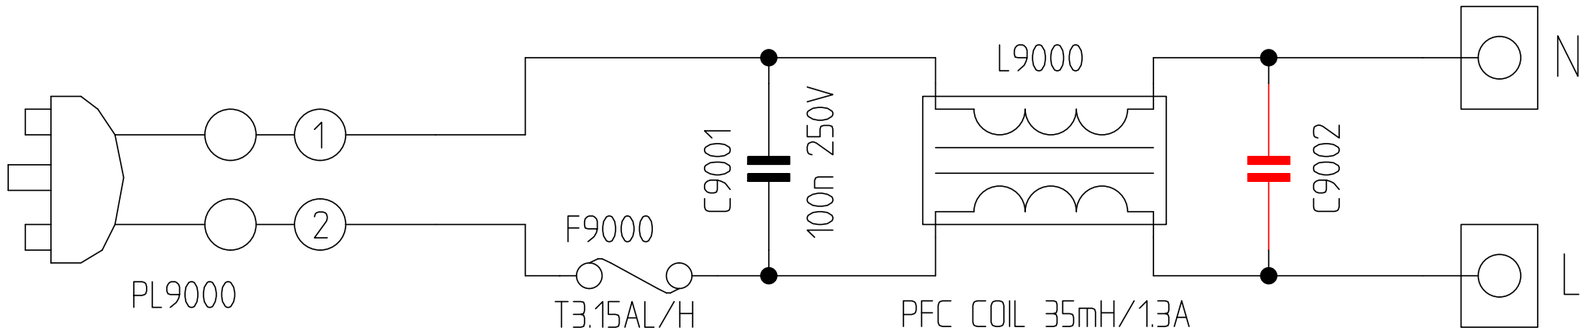

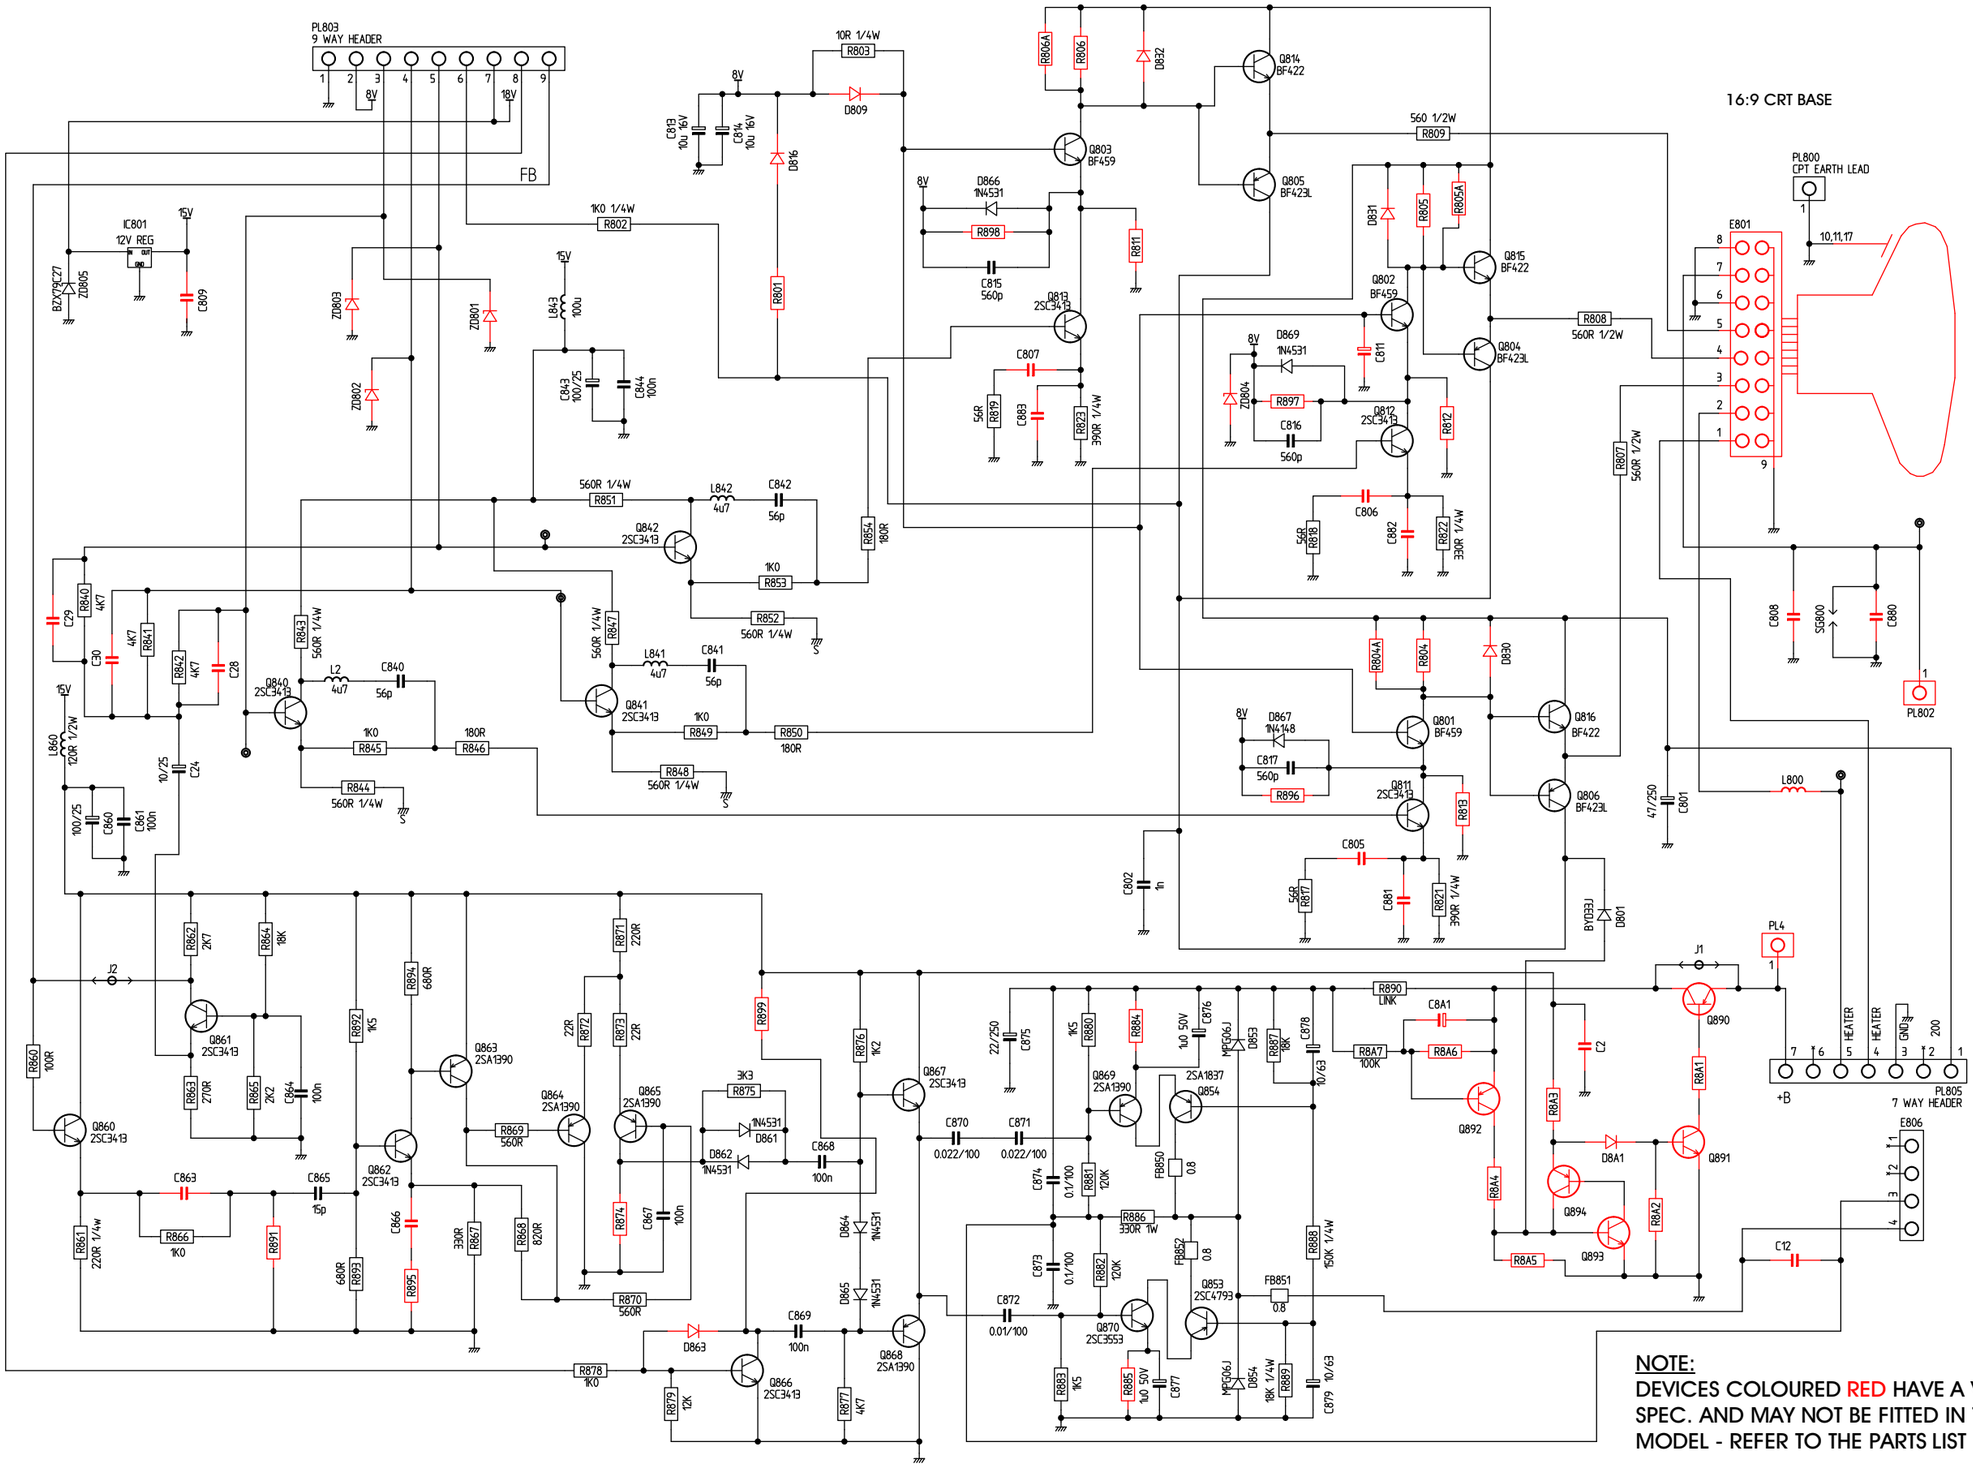

SM 00030	A7 16:9 CRT BASE CIRCUIT	HITACHI

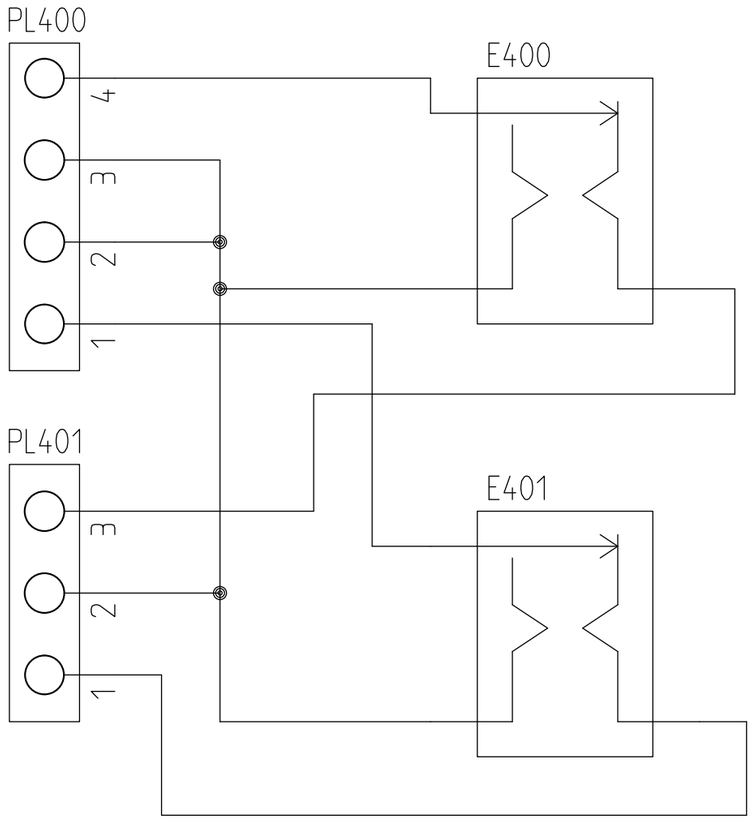
PL400
4
3
2
1
E400
PL401
3
2
1
E401

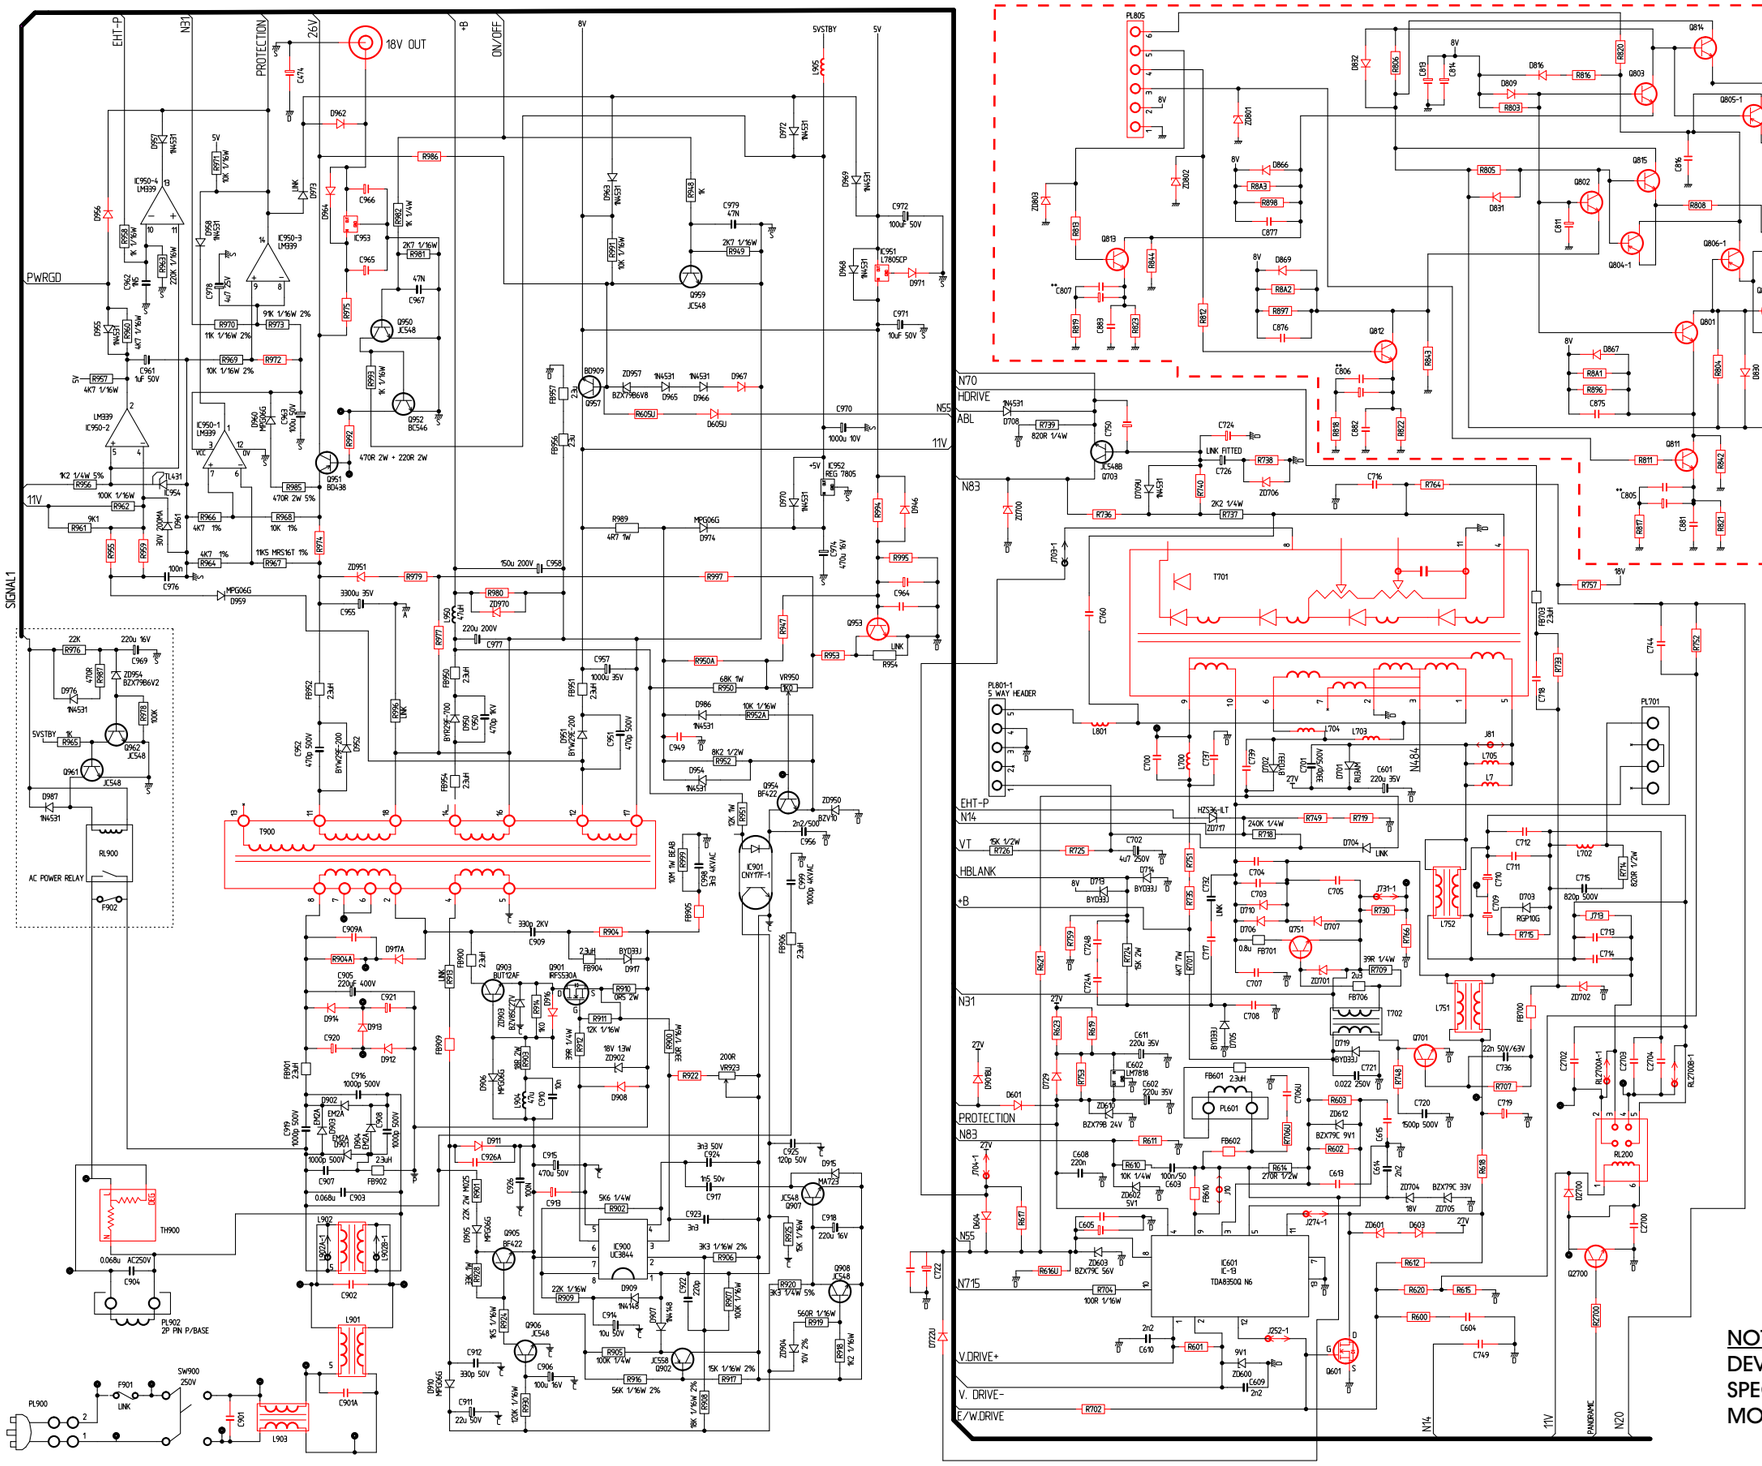
CRT BASE
NOTE:
THIS CRT BASE CIRCUIT IS NOT FITTED IN SOME MODELS - REFER TO PARTS LIST
** WHEN FITTED THIS COMPONENT WILL BE AN ECAP EXCEPT ON 32" MODELS WHERE A NORMAL CAP IS FITTED
NOTE:
DEVICES COLOURED RED HAVE A VARIABLE SPEC. AND MAY NOT BE FITTED IN THIS MODEL - REFER TO THE PARTS LIST
18V OUT
PROTECTION
ON/OFF
PWRGD
SIGNAL1
EHT-P
HDRIVE
ABL
HBLANK
VT
V.DRIVE+
V. DRIVE-
E/W.DRIVE
AC POWER RELAY
PL902 2P PIN P/BASE
PL802
PL804-1
PL805
PL800
PL701
PL801-1 5 WAY HEADER
IC950-1 LM339
IC950-2 LM339
IC950-3 LM339
IC952 REG 7805
IC601 E-S TDA8350Q N6
IC900 UC3844
IC901 OVTTF-1
T900
T701
T702
T751
T752
T731-1
L751
L752
L801
L902
L903
L901
TH900
RL900
F902
F901
SW900
Q951 BDA38
Q952 BC546
Q953
Q954 BF422
Q957 BD909
Q959 JC548
Q962 JC548
Q963 BUT12AF
Q964 BUK456-200A
Q965 BUK456-200A
Q966 BUK456-200A
Q967 BUK456-200A
Q968 BUK456-200A
Q969 BUK456-200A
Q701
Q751
Q801
Q802
Q803
Q804-1
Q805-1
Q806-1
Q811
Q812
Q813
Q814
Q815
Q816
Q2700
Q601
E801
N70
N55
N83
N715
N14
N31
11V
5V
5VSTBY
8V
22V
N20
PANDRAME

NOTE:
DEVICES COLOURED RED HAVE A VARIABLE SPEC. AND MAY NOT BE FITTED IN THIS MODEL - REFER TO THE PARTS LIST

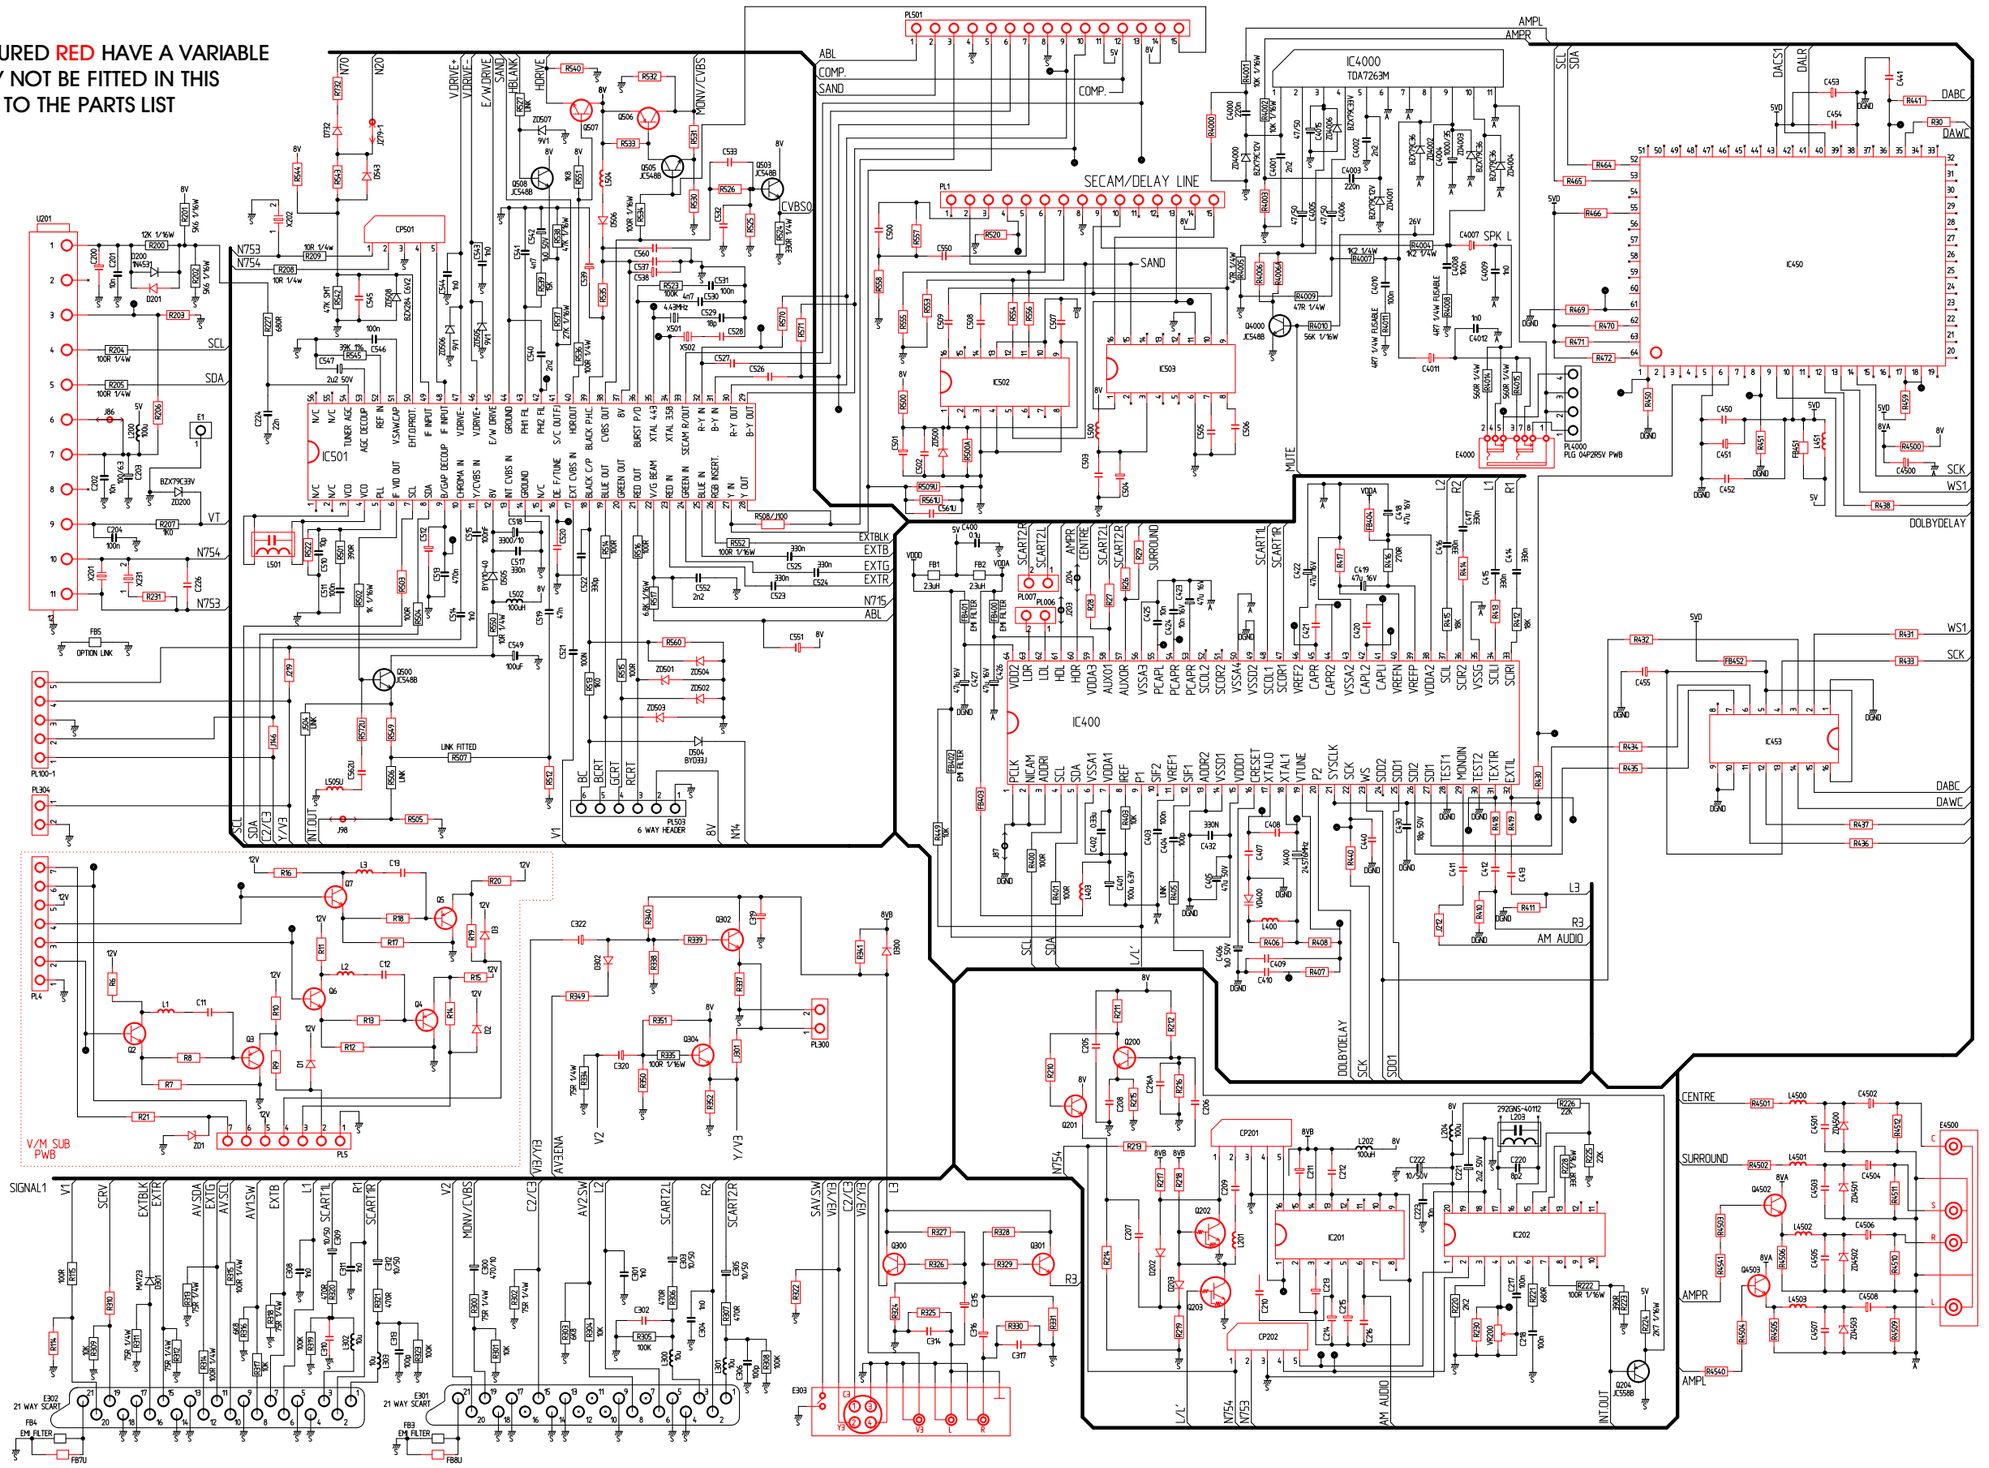

SM 00030	A7 MAIN BOARD (SIGNAL CIRCUIT)	HITACHI

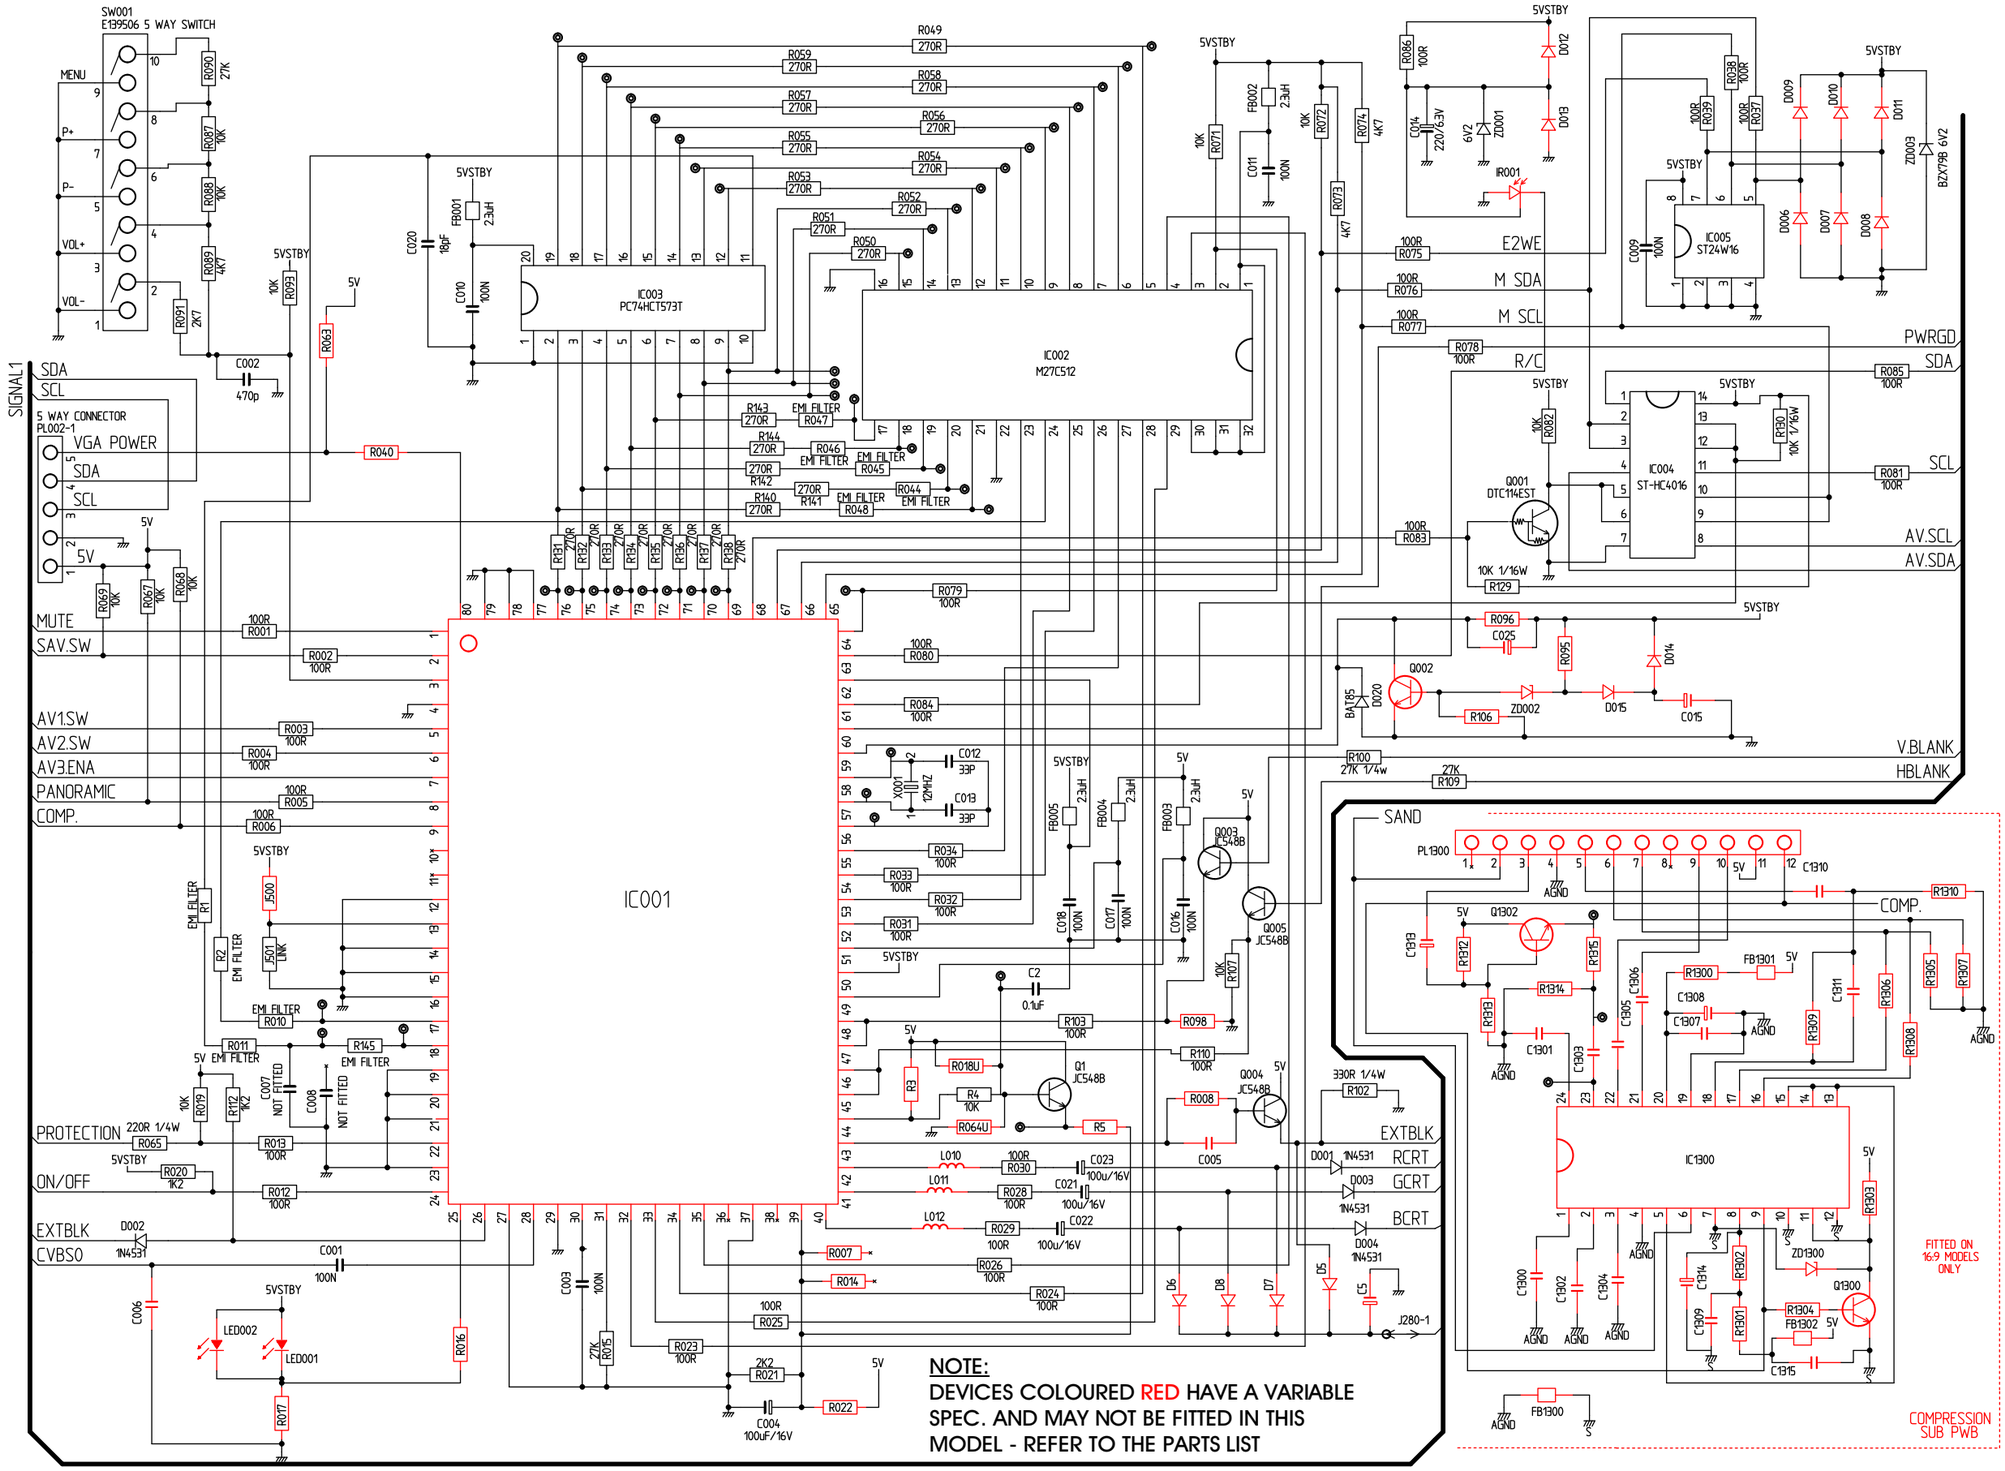

SM 00030	A7 MAIN BOARD (MICRO CIRCUIT)	HITACHI

A527370		**MAIN BOARD**	
#5000	N936193	A7 CHASSIS FRAME NICAM	
#5001	JBM00041	FERRITE CORES BP53RB	
#5060	G863063	RIVET	
#701	J3333961	GROUNDING SPRING	
⚠ B001	PC50202	A7 MAIN PCB BEAB	
C001	J0880194R	0.1UF 50V +-5% (100N)	
C002	J0890083R	CK45 B1H471KB	
C003	J0893027R	CKM-104K250B-CNT2125	
C004	J0800326R	CEL-101M160WMFT	
C009	J0880194R	0.1UF 50V +-5% (100N)	
C010	J0880194R	0.1UF 50V +-5% (100N)	
C011	J0893027R	CKM-104K250B-CNT2125	
C012	J0228042R	CC73SCH1H330JR	
C013	J0228042R	CC73SCH1H330JR	
C014	J0800333R	CEL 221M6R3WMFT	
C016	J0880194R	0.1UF 50V +-5% (100N)	
C017	J0880194R	0.1UF 50V +-5% (100N)	
C018	J0880194R	0.1UF 50V +-5% (100N)	
C020	J0890064R	CER CAP 18PF 50V	
C021	J0800326R	CEL-101M160WMFT	
C022	J0800326R	CEL-101M160WMFT	
C023	J0800326R	CEL-101M160WMFT	
C025	J0800282R	CAP ELECTRO 2.2UF-M 50V	
C2	J0880194R	0.1UF 50V +-5% (100N)	
C200	J0800317R	CP ELECTRO 47UF SMG 16	
C201	C140759	10N 63V POLY MMK5 R/EVOX	
C202	J0880044R	CAP POLYESTER 0.01UF K50V	
C203	J0800324R	C/ELEC 100UF M SMG 6.3V	
C204	J0880194R	0.1UF 50V +-5% (100N)	
C211	J0800299R	CAP ELECTRO 22UF 16V	
C212	J0880194R	0.1UF 50V +-5% (100N)	
C217	J0880194R	0.1UF 50V +-5% (100N)	
C218	J0880194R	0.1UF 50V +-5% (100N)	
C220	C802182	8.2PF 50V 2% DRG NO	
C221	J0800282R	CAP ELECTRO 2.2UF-M 50V	
C222	J0800294R	ELECT CAP 10UF 50V SMG	
C223	J0880044R	CAP POLYESTER 0.01UF K50V	
C224	J0880048R	CQT223K50MB (PANASONIC)	
C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C2702	J0299930F	CQ93E2D224KPF	
C2703	J0299931F	POLY CAP 270N 200V	
C300	J0800352R	ELEC CAP 470UF 10V SMG	
C301	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C302	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C303	J0800294R	ELECT CAP 10UF 50V SMG	
C304	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C305	J0800294R	ELECT CAP 10UF 50V SMG	
C306	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C308	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C309	J0800294R	ELECT CAP 10UF 50V SMG	
C310	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C311	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C312	J0800294R	ELECT CAP 10UF 50V SMG	
C313	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C314	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C315	J0800294R	ELECT CAP 10UF 50V SMG	
C316	J0800294R	ELECT CAP 10UF 50V SMG	
C317	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C319	J0800352R	ELEC CAP 470UF 10V SMG	
C320	J0800291R	CAP ELEC 10uF 16V SMG	
C322	J0800291R	CAP ELEC 10uF 16V SMG	
C400	J0880194R	0.1UF 50V +-5% (100N)	
C4000	J0880062R	CQ93M1H224KEB	
C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C4003	J0880062R	CQ93M1H224KEB	
C4004	J0800363F	CEO4W1F102M (SMG)	
C4005	J0800321R	ELECT CAP 47UF 50V SMG	
C4006	J0800321R	ELECT CAP 47UF 50V SMG	
C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V	
C4008	J0880194R	0.1UF 50V +-5% (100N)	
C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C401	J0800324R	C/ELEC 100UF M SMG 6.3V	
C4010	J0880194R	0.1UF 50V +-5% (100N)	
C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V	
C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C4015	J0800321R	ELECT CAP 47UF 50V SMG	
C402	C353883	GRM40Y5V334Z16PT	
C403	J0880194R	0.1UF 50V +-5% (100N)	
C404	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C405	J0800321R	ELECT CAP 47UF 50V SMG	
C406	J0800279R	ELECT CAP 1.UF 50V	
C407	J0195250R	RMC73S 000R	
C408	C506881	GRM40COG5R6D50-500	
C409	C506881	GRM40COG5R6D50-500	
C412	C457759	470N 63V POLY MMK5 RIFA/E	
C413	C457759	470N 63V POLY MMK5 RIFA/E	
C414	C353883	GRM40Y5V334Z16PT	
C415	C353883	GRM40Y5V334Z16PT	
C416	C353883	GRM40Y5V334Z16PT	
C417	C353883	GRM40Y5V334Z16PT	
C418	J0800317R	CP ELECTRO 47UF SMG 16	
C419	J0800317R	CP ELECTRO 47UF SMG 16	
C422	J0800317R	CP ELECTRO 47UF SMG 16	
C423	J0800317R	CP ELECTRO 47UF SMG 16	
C424	C140882	GRM40X7R103K50-550	
C425	C140882	GRM40X7R103K50-550	
C426	J0800317R	CP ELECTRO 47UF SMG 16	
C427	J0800317R	CP ELECTRO 47UF SMG 16	
C430	J0228736R	CC73SSL1H180JR	
C432	C353883	GRM40Y5V334Z16PT	
C473	OPTION	NOT FITTED	
C510	J0890114R	CAP CERAMIC 10pf-D 50V CH	
C511	J0880194R	0.1UF 50V +-5% (100N)	
C513	C457883	GRM40Y5V474Z16PT	
C514	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C515	J0880194R	0.1UF 50V +-5% (100N)	
C517	C353883	GRM40Y5V334Z16PT	
C518	J0800371F	ELECT CAP 3300UF 10V SMG	
C519	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C520	J0893013R	CKM224K160B-2125	
C521	J0880194R	0.1UF 50V +-5% (100N)	
C522	J0228066R	GRM40CDG331J50PT	
C523	J0880064R	CQM - 334J500HFT	
C524	J0880064R	CQM - 334J500HFT	
C525	J0880064R	CQM - 334J500HFT	
C528	J0890121R	CAP CERAMIC 33pf-J 50V CH	
C529	J0890117R	CAP CERAMIC 18pf-J 50V CH	
C530	J0880039R	CQM472K500HFT	
C531	J0880194R	0.1UF 50V +-5% (100N)	
C533	C506182	5.6PF 50V 2% DRG NO	
C537	J0893048R	CKM-223K500B-CNT2125	
C538	J0800086	2200u/10V ELEC	
C539	J0880194R	0.1UF 50V +-5% (100N)	
C540	J0893035R	CKM--222K500B CNT2125	
C541	J0880039R	CQM472K500HFT	
C542	J0800279R	ELECT CAP 1.UF 50V	
C543	J0893031R	CKM 102K500B CNT2125	
C544	J0893031R	CKM 102K500B CNT2125	
C545	J0893027R	CKM-104K250B-CNT2125	
C546	C150711	CAP 100N 36521104 100V POL	
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V	
C549	J0800326R	CEL-101M160WMFT	
C552	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C560	J0893035R	CKM--222K500B CNT2125	
C601	J0800337R	CEL-221M350WMFT	
C602	J0800337R	CEL-221M350WMFT	
C603	J0880194R	0.1UF 50V +-5% (100N)	
C604	J0880033R	CQM-152K500HFT	
C605	C457759	470N 63V POLY MMK5 RIFA/E	

	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C701	J0243507R	CK45B2H331KB
	C702	J0257540F	ELEC CAP 4U7 250V
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	J0244213R	CKL-152K202R-DLT
	C705	J0299624F	15nF 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	JAJ00134	CK45-R3DD 102K-GR
	C708	J0245612F	CK45B3A472K
	C709	J0800021R	CEL - 100M101WMLT-SME
	C710	J0800021R	CEL - 100M101WMLT-SME
	C711	J0299932F	CQ93E2D334KPF
	C712	J0299929F	POLY CAP 180N 200V
	C713	J0299934F	CAP POLYPRO FILM 0.47UF
	C714	J0299934F	CAP POLYPRO FILM 0.47UF
	C715	J0243512R	CK45B2H821KB
	C716U	C140707	CAP 10N 365-51103 MULARD
	C717	J0244211R	CK45B53D102K
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800321R	ELECT CAP 47UF 50V SMG
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C744	J0880039R	CQM472K500HFT
	C749	J0880033R	CQM-152K500HFT
	C801	J0253975F	47UF 250V SME
	C802	J0243512R	CK45B2H821KB
	C813	J0800291R	CAP ELEC 10uF 16V SMG
	C814	J0800291R	CAP ELEC 10uF 16V SMG
	C816	J0890087R	CAP CERAMIC 1000pf-B 50V
	C875	C130877	CER CAP 1N0
	C876	C130877	CER CAP 1N0
	C877	C130877	CER CAP 1N0
	C880	E884110	SPARK GAP 10N 2KV SDUK 16
	C881	J0890077R	CKL-181K500BDFT-D3
	C882	J0890077R	CKL-181K500BDFT-D3
	C883	J0890077R	CKL-181K500BDFT-D3
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333753	3N3 "Y"CLASS PME294 BEABT
⚠	C999	C130753	1N0 "Y" PME294 UL BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518058	K9260M SAW DK/BG SOUND
	CP501	E518053	K3953M
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D506	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D604	J2343962M	MPG06G
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
⚠	D705	T431113	DIODE BYD33J MULL BEAB
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
	D711	OPTION	NOT FITTED
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D729	OPTION	NOT FITTED
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G
	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER

	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D963	J2348921M	DIODE 1N4531
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	DRG ASSY	A527900	A7 UP ISS DRWG ASSY
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
⚠	E801	E822924	CPT SKT 4545/S7 ~BEAB~
	E804	E843241	CPT EARTH LEAD~GREENLIGHT
	E805	E846894	6 WAY IDC LEAD (FEMALE)
	E806	E846905	4WAY IDC LEAD FEMALE
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123461M	FERRITE BEAD 0.8uH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235409	HEATSINK
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L702	L380115	LIN COIL LSLH13JW05SH
	L706	JBH00039R	HC-820 KS1 (LHL10)
	L751	L380117	BRIDGE COIL 5MH
	L752	L380147	&BRIDGE COIL
	L800	JBH00039	HC-820KS1 (LHL10)
⚠	L901	L210063	M-FIL B82724-J2142-N1 BEAB
⚠	L902	L210063	M-FIL B82724-J2142-N1 BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED002	T547050	&SLR37VC3F LED ROHM
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
	PL804	J2902264	PLG-05P 2R5V PWB
	PL805	J2902265	PLG-06P2RVPWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B

Q4000	J2315891R	TRS JC548B
Q500	J2315891R	TRS JC548B
Q503	J2315891R	TRS JC548B
Q505	J2315891R	TRS JC548B
Q508	J2315891R	TRS JC548B
Q601	T636077	&IRFS530A ISOL SAMSUNG
Q601B	J4520889	SCREW
Q601D	J8821114	NUT 3
Q701	T633137	TRANS BF459 MULLARD/SES
Q703	J2315891R	TRS JC548B
Q751	J2315451	TRS-BU2508AF
Q751A	H235305	HEATSINK G7PS 3
Q751B	G884027	SPRING CLIP
Q801	T633137	TRANS BF459 MULLARD/SES
Q802	T633137	TRANS BF459 MULLARD/SES
Q803	T633137	TRANS BF459 MULLARD/SES
Q804	T633143	BF423L PHILIPS
Q805	T633143	BF423L PHILIPS
Q806	T633143	BF423L PHILIPS
Q811	J2327773R	2SC3413 TRANSISTOR
Q812	J2327773R	2SC3413 TRANSISTOR
Q813	J2327773R	2SC3413 TRANSISTOR
Q814	T633133	TRANS BF422 BAND MULL/AEG
Q815	T633133	TRANS BF422 BAND MULL/AEG
Q816	T633133	TRANS BF422 BAND MULL/AEG
Q901	T636077	&IRFS530A ISOL SAMSUNG
Q902	J2315921R	TRS JC558B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235418	POWER HEATSINK(TERNEX)
Q903B	G884027	SPRING CLIP
Q903C	B976404	HEAT SINK COMPOUND 340
Q905	T633133	TRANS BF422 BAND MULL/AEG
Q906	J2315891R	TRS JC548B
Q907	J2315891R	TRS JC548B
Q908	J2315891R	TRS JC548B
Q950	J2315891R	TRS JC548B
Q951	T632084	BD438 TRANS'R MOTOROLA
Q952	T631265	BC546B
Q954	T633133	TRANS BF422 BAND MULL/AEG
Q957	T636069	BD909 SGS NON-IS0
Q957A	H234344	POWER HEATSINK G7PS3
Q957B	G311331	M3 FULLNUT
Q957C	B976404	HEAT SINK COMPOUND 340
Q957D	F133310	M3X10MM POZI PAN M/C SCRW
Q957E	G560331	M3 SPRING WASHER~TR FAST~
Q959	J2315891R	TRS JC548B
R001	J0700027M	100R 1/16W C/FILM 5%
R002	J0700027M	100R 1/16W C/FILM 5%
R003	J0700027M	100R 1/16W C/FILM 5%
R004	J0700027M	100R 1/16W C/FILM 5%
R005	J0700027M	100R 1/16W C/FILM 5%
R006	J0195875R	RMC73S 2A101JR
R008	J0195912R	RMC73S 2A332JR
R010	E770091	EMI FILTER MURATA
R011	E770091	EMI FILTER MURATA
R012	J0700027M	100R 1/16W C/FILM 5%
R013	J0700027M	100R 1/16W C/FILM 5%
R015	J0700059M	27K 1/16W C/FILM 5%
R016	J0700034M	330R 1/16W C/FILM 5%
R017	J0187060M	RD14S1J621JB
R019	J0700054M	10K 1/16W C/FILM 5%
R020	J0700042M	1K2 1/16W C/FILM 5%
R021	J0700045M	2K2 1/16W C/FILM 5%
R023	J0700027M	100R 1/16W C/FILM 5%
R024	J0700027M	100R 1/16W C/FILM 5%
R025	J0700027M	100R 1/16W C/FILM 5%
R026	J0700027M	100R 1/16W C/FILM 5%
R028	J0195875R	RMC73S 2A101JR
R029	J0195875R	RMC73S 2A101JR
R030	J0195875R	RMC73S 2A101JR
R031	J0700027M	100R 1/16W C/FILM 5%
R032	J0700027M	100R 1/16W C/FILM 5%
R033	J0700027M	100R 1/16W C/FILM 5%
R034	J0700027M	100R 1/16W C/FILM 5%
R037	J0700027M	100R 1/16W C/FILM 5%
R038	J0700027M	100R 1/16W C/FILM 5%
R039	J0700027M	100R 1/16W C/FILM 5%
R044	E770091	EMI FILTER MURATA
R045	E770091	EMI FILTER MURATA
R046	E770091	EMI FILTER MURATA
R047	E770091	EMI FILTER MURATA
R048	E770091	EMI FILTER MURATA
R049	J0195885R	RMC73S 2A271JR
R050	J0195885R	RMC73S 2A271JR
R051	J0195885R	RMC73S 2A271JR
R052	J0195885R	RMC73S 2A271JR
R053	J0195885R	RMC73S 2A271JR
R054	J0195885R	RMC73S 2A271JR
R055	J0195885R	RMC73S 2A271JR
R056	J0195885R	RMC73S 2A271JR
R057	J0195885R	RMC73S 2A271JR
R058	J0195885R	RMC73S 2A271JR
R059	J0195885R	RMC73S 2A271JR
R065	R222330	220R 1/4W DRG NO
R067	J0700054M	10K 1/16W C/FILM 5%
R068	J0700054M	10K 1/16W C/FILM 5%
R069	J0700054M	10K 1/16W C/FILM 5%
R071	J0700054M	10K 1/16W C/FILM 5%
R072	J0700054M	10K 1/16W C/FILM 5%
R073	J0700049M	4K7 1/16W C/FILM 5%
R074	J0700049M	4K7 1/16W C/FILM 5%
R075	J0700027M	100R 1/16W C/FILM 5%
R076	J0700027M	100R 1/16W C/FILM 5%
R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%

R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R214	J0187086M	RD14S1J752JB
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700044M	1K8 1/16W C/FILM 5%
R26	J0195250R	RMC73S 000R
R27	J0195250R	RMC73S 000R
R2700	R120330	100R 1/4W DRG NO
R3	J0195013R	RMC73 2B102JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO
R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0700057M	18K 1/16W C/FILM 5%
R414	J0700057M	18K 1/16W C/FILM 5%
R415	J0700057M	18K 1/16W C/FILM 5%
R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R449	J0700054M	10K 1/16W C/FILM 5%
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700032M	220R 1/16W C/FILM 5%
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%
R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R532	R128330	180R 1/4W DRG NO
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	R457725	470K 1/16W MRS16T 1% M/F
R544	J0700069M	150K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700029M	150R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R
R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R105330	1.5R 1/4W DRG NO
R603	R202330	2R2 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R621	R842570	82K 1W 5% MO1S
R701	J0140933S	RSL-472J7WS(BSR-Z)

R702	R120330	100R 1/4W DRG NO
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R145549	15K FF84~WELWYN~
R726	J0113778M	RD14S2H153JB
R733	R323330	330R 1/4W DRG NO
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R832330	8K2 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147630	7W 6.8R WIRE WOUND ~PAN~
R759	R437330	4K7 1/4W DRG NO
R764	R658330	680K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R803	R110330	10R 1/4W DRG NO
R804	R145571	15K 2W 5% MO2S F
R805	R145571	15K 2W 5% MO2S F
R806	R145571	15K 2W 5% MO2S F
R807	J0113744M	RD14S2H561JB
R808	J0113744M	RD14S2H561JB
R809	J0113744M	RD14S2H561JB
R811	J0700041M	1K 1/16W C/FILM 5%
R812	J0700041M	1K 1/16W C/FILM 5%
R813	J0700041M	1K 1/16W C/FILM 5%
R820	R130330	1K 1/4W DRG NO
R821	R427330	470R 1/4W DRG NO
R822	R427330	470R 1/4W DRG NO
R823	R427330	470R 1/4W DRG NO
R896	R132330	1K2 1/4W DRG NO
R897	R132330	1K2 1/4W DRG NO
R898	R132330	1K2 1/4W DRG NO
R8A1	R822330	820R 1/4W DRG NO
R8A2	R822330	820R 1/4W DRG NO
R8A3	R822330	820R 1/4W DRG NO
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0100101M	RD14S2B333JB
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%
R955	R457725	470K 1/16W MRS16T 1% M/F
R956	R132330	1K2 1/4W DRG NO
R957	J0700049M	4K7 1/16W C/FILM 5%
R958	J0700041M	1K 1/16W C/FILM 5%
R959	R145725	15K MRS16T 1% M/FILM
R960	J0700049M	4K7 1/16W C/FILM 5%
R961	R832725	8K2 MRS16T 1% M/FILM
R962	J0700067M	100K 1/16W C/FILM 5%
R963	R252725	220K 1/16W MRS16T 1% M/F
R964	R437725	4K7 MRS16T 1% M/FILM
R966	R437725	4K7 MRS16T 1% M/FILM
R967	R000708	11.5K MRS16T 1% 1/16W
R968	R140725	10K MRS16T 1% M/FILM
R969	R140725	10K MRS16T 1% M/FILM
R970	R141725	11K MRS16T 1% M/FILM
R971	J0700054M	10K 1/16W C/FILM 5%
R972	R000709	64.9K MRS16T 1% 1/16W
R973	R941725	91K MRS16T 1% M/FILM
R974	J0147516	RES 1R 5W 7APK
R980	R648570	68K 1W 5% MO1S F
R981	J0700046M	2K7 1/16W C/FILM 5%
R982	R130330	1K 1/4W DRG NO
R985	R427571	470R 2W 5% M02S F
R986	R526571	560R 2W 5% M02S F
R989	R407542	4R7 1W FF83 WELWYN
R991	J0700054M	10K 1/16W C/FILM 5%
R992	R628858	680R 4W VTM KP292 15mmP
R993	J0700041M	1K 1/16W C/FILM 5%
⚠ R999	R170727	10M 1W VR68 UL BEAB
⚠ RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
SG800	J2340039	SPARK GAP - FORMED
SW001	E139408	4 WAY TACT SWITCH~ALPS~
⚠ SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠ T701	JBW01051	FBT HFL1530G BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠ T900	L380122	SMT-SLOT FAE42/15 BEABT
TH900	E441044	PTC TYPE 2322-662-96609
U201	E710060	& UE25-B57D UK (VA)
VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
W2700	W024001	0.56ML SFT TIN'D COP WIRE
W800	EC5A400A	7/0.2MM S000030
X001	E516030F	12MHz X'TAL NDK 5MM LEG
X400	E516056F	24.576MHZ CRYSTAL
X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
X502	J2791502	X'TAL 3.58MHZ NDK
Z901BU	J9451136	UL CSA TUBE N08
Z904	B912312	WHITE TAPE N069X12X33
Z905A	W470200	1MM 1/D SLEEVING BLACK
Z905B	W470200	1MM 1/D SLEEVING BLACK
ZC706U	B912312	WHITE TAPE N069X12X33
ZD001	T536179	BZX79C 6V2~PHILIPS~
ZD003	T536225	BZX79B 6V2 ~PHILIPS~
ZD200	T536215	BZX 79C 33V~PHILIPS~
ZD4000	T536177	BZX79C 12V~PHILIPS~
ZD4001	T536177	BZX79C 12V~PHILIPS~
ZD4002	T536171	BZX79C36V~PHILIPS~
ZD4003	T536171	BZX79C36V~PHILIPS~
ZD4004	T536171	BZX79C36V~PHILIPS~
ZD4006	T536215	BZX 79C 33V~PHILIPS~
ZD501	T536186	BZX79C 8V2~PHILIPS~
ZD502	T536186	BZX79C 8V2~PHILIPS~
ZD503	T536186	BZX79C 8V2~PHILIPS~
ZD504	T536284	BZX284-C9V1
ZD505	T536184	BZX79C 9V1~PHILIPS~
ZD506	T536184	BZX79C 9V1~PHILIPS~

ZD507	T536184	BZX79C 9V1~PHILIPS~
ZD508	T536280	BZX284-C6V2
ZD600	T536184	BZX79C 9V1~PHILIPS~
ZD602	T536174	BZX79C 5V1~PHILIPS~
ZD603	T536259	BZX79C56V
ZD610	T536237	BZX79B24V~PHILIPS~
ZD612	T536184	BZX79C 9V1~PHILIPS~
ZD700	T536236	BZX79B22V~PHILIPS~
ZD704	T536246	ZENER 18V 1.3W MULL
ZD705	T536215	BZX 79C 33V~PHILIPS~
ZD706	T536185	BZX79C 5V6~PHILIPS~
ZD717	J2339251M	HZS36-lLT
ZD902	T536246	ZENER 18V 1.3W MULL
ZD903	T536266	BZV85-C27V
ZD904	T536176	BZX 79C10V~PHILIPS~
ZD950	T536207	DIODE BZV10 REF MULLARD
ZD957	T536226	BZX79B6V8
ZD970	J2344122M	PGKE180AG23
ZR706U	B912312	WHITE TAPE N069X12X33

A528130		**MAIN BOARD**	
#5000	N936193	A7 CHASSIS FRAME NICAM	
#5001	JBM00041	FERRITE CORES BP53RB	
#5030	G864008	CABLE TIE T18L H.S.	
#5110	G202402	M3X8 BRAZIER S-TITE SCR	
#701	J3333961	GROUNDING SPRING	
#7100	B912319	WHITE GLASS NO69X19X33	
⚠ B001	PC50302	A7 32" 16;9 M/PCB BEAB	
C001	J0880194R	0.1UF 50V +-5% (100N)	
C002	J0890083R	CK45 B1H471KB	
C003	J0893027R	CKM-104K250B-CNT2125	
C004	J0800326R	CEL-101M160WMFT	
C009	J0880194R	0.1UF 50V +-5% (100N)	
C010	J0880194R	0.1UF 50V +-5% (100N)	
C011	J0893027R	CKM-104K250B-CNT2125	
C012	J0228042R	CC73SCH1H330JR	
C013	J0228042R	CC73SCH1H330JR	
C014	J0800333R	CEL 221M6R3WMFT	
C016	J0880194R	0.1UF 50V +-5% (100N)	
C017	J0880194R	0.1UF 50V +-5% (100N)	
C018	J0880194R	0.1UF 50V +-5% (100N)	
C020	J0890064R	CER CAP 18PF 50V	
C021	J0800326R	CEL-101M160WMFT	
C022	J0800326R	CEL-101M160WMFT	
C023	J0800326R	CEL-101M160WMFT	
C025	J0800282R	CAP ELECTRO 2.2UF-M 50V	
C2	J0880194R	0.1UF 50V +-5% (100N)	
C200	J0800317R	CP ELECTRO 47UF SMG 16	
C201	C140759	10N 63V POLY MMK5 R/EVOX	
C202	J0880044R	CAP POLYESTER 0.01UF K50V	
C203	J0800324R	C/ELEC 100UF M SMG 6.3V	
C204	J0880194R	0.1UF 50V +-5% (100N)	
C211	J0800299R	CAP ELECTRO 22UF 16V	
C212	J0880194R	0.1UF 50V +-5% (100N)	
C217	J0880194R	0.1UF 50V +-5% (100N)	
C218	J0880194R	0.1UF 50V +-5% (100N)	
C220	C802182	8.2PF 50V 2% DRG NO	
C221	J0800282R	CAP ELECTRO 2.2UF-M 50V	
C222	J0800294R	ELECT CAP 10UF 50V SMG	
C223	J0880044R	CAP POLYESTER 0.01UF K50V	
C224	J0880048R	CQT223K50MB (PANASONIC)	
C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C2702	J0299926F	CQ93E2D104KPF	
C2703	J0299930F	CQ93E2D224KPF	
C300	J0800352R	ELEC CAP 470UF 10V SMG	
C301	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C302	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C303	J0800294R	ELECT CAP 10UF 50V SMG	
C304	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C305	J0800294R	ELECT CAP 10UF 50V SMG	
C306	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C308	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C309	J0800294R	ELECT CAP 10UF 50V SMG	
C310	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C311	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C312	J0800294R	ELECT CAP 10UF 50V SMG	
C313	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C314	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C315	J0800294R	ELECT CAP 10UF 50V SMG	
C316	J0800294R	ELECT CAP 10UF 50V SMG	
C317	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C319	J0800352R	ELEC CAP 470UF 10V SMG	
C320	J0800291R	CAP ELEC 10uF 16V SMG	
C322	J0800291R	CAP ELEC 10uF 16V SMG	
C400	J0880194R	0.1UF 50V +-5% (100N)	
C4000	J0880062R	CQ93M1H224KEB	
C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C4003	J0880062R	CQ93M1H224KEB	
C4004	J0800363F	CEO4W1F102M (SMG)	
C4005	J0800321R	ELECT CAP 47UF 50V SMG	
C4006	J0800321R	ELECT CAP 47UF 50V SMG	
C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V	
C4008	J0880194R	0.1UF 50V +-5% (100N)	
C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C401	J0800324R	C/ELEC 100UF M SMG 6.3V	
C4010	J0880194R	0.1UF 50V +-5% (100N)	
C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V	
C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C4015	J0800321R	ELECT CAP 47UF 50V SMG	
C402	C353883	GRM40Y5V334Z16PT	
C403	J0880194R	0.1UF 50V +-5% (100N)	
C404	J0890074R	CAP CERAMIC 100pf-J 50VSL	
C405	J0800321R	ELECT CAP 47UF 50V SMG	
C406	J0800279R	ELECT CAP 1.UF 50V	
C407	J0195250R	RMC73S 000R	
C408	C506881	GRM40COG5R6D50-500	
C409	C506881	GRM40COG5R6D50-500	
C412	C457759	470N 63V POLY MMK5 RIFA/E	
C413	C457759	470N 63V POLY MMK5 RIFA/E	
C414	C353883	GRM40Y5V334Z16PT	
C415	C353883	GRM40Y5V334Z16PT	
C416	C353883	GRM40Y5V334Z16PT	
C417	C353883	GRM40Y5V334Z16PT	
C418	J0800317R	CP ELECTRO 47UF SMG 16	
C419	J0800317R	CP ELECTRO 47UF SMG 16	
C422	J0800317R	CP ELECTRO 47UF SMG 16	
C423	J0800317R	CP ELECTRO 47UF SMG 16	
C424	C140882	GRM40X7R103K50-550	
C425	C140882	GRM40X7R103K50-550	
C426	J0800317R	CP ELECTRO 47UF SMG 16	
C427	J0800317R	CP ELECTRO 47UF SMG 16	
C432	C353883	GRM40Y5V334Z16PT	
C473	OPTION	NOT FITTED	
C510	J0890114R	CAP CERAMIC 10pf-D 50V CH	
C511	J0880194R	0.1UF 50V +-5% (100N)	
C513	C457883	GRM40Y5V474Z16PT	
C514	J0880031R	CQ93M1H102KEB (MF) N/PAN	
C515	J0880194R	0.1UF 50V +-5% (100N)	
C517	C353883	GRM40Y5V334Z16PT	
C518	J0800371	ELECT CAP 3300UF 10V SMG	
C519	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C520	J0893013R	CKM224K160B-2125	
C521	J0880194R	0.1UF 50V +-5% (100N)	
C522	J0228066R	GRM40CDG331J50PT	
C523	J0880064R	CQM - 334J500HFT	
C524	J0880064R	CQM - 334J500HFT	
C525	J0880064R	CQM - 334J500HFT	
C528	J0890121R	CAP CERAMIC 33pf-J 50V CH	
C529	J0890117R	CAP CERAMIC 18pf-J 50V CH	
C530	J0880039R	CQM472K500HFT	
C531	J0880194R	0.1UF 50V +-5% (100N)	
C532	OPTION	NOT FITTED	
C533	C506182	5.6PF 50V 2% DRG NO	
C537	J0893048R	CKM-223K500B-CNT2125	
C538	J0800086	2200u/10V ELEC	
C539	J0880194R	0.1UF 50V +-5% (100N)	
C540	J0893035R	CKM--222K500B CNT2125	
C541	J0880039R	CQM472K500HFT	
C542	J0800279R	ELECT CAP 1.UF 50V	
C543	J0893031R	CKM 102K500B CNT2125	
C544	J0893031R	CKM 102K500B CNT2125	
C545	J0893027R	CKM-104K250B-CNT2125	
C546	C150711	CAP 100N 36521104 100V POL	
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V	
C549	J0800326R	CEL-101M160WMFT	
C552	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C560	J0893035R	CKM--222K500B CNT2125	
C601	J0800337R	CEL-221M350WMFT	

	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E
	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C700U	J0244202F	CK45R3D471K
	C701	J0243507R	CK45B2H331KB
	C702	J0257540F	ELEC CAP 4U7 250V
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	JAJ00141F	CC-332K202R-D 10P 3N3 2KV
	C705	J0299993F	CAP 18NF 5% 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	C333760	3N3 1.6KV R/EVOX PHE428
	C708	J0245612F	CK45B3A472K
	C709	J0253953R	CE04W2C2R2M
	C710	J0253953R	CE04W2C2R2M
	C711	J0299933F	POLY CAP FILM 390N 200V
	C712	J0299932F	CQ93E2D334KPF
	C713	J0299932F	CQ93E2D334KPF
	C714	J0299931F	POLY CAP 270N 200V
	C715	J0243512R	CK45B2H821KB
	C716	C140707	CAP 10N 365-51103 MULARD
	C717	J0244211R	CK45B53D102K
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800303R	ELECT CAP 22UF 50V SMG
	C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C737	C160708	1UF +-10% 250V 368-45105
	C744	J0880048R	CQT223K50MB (PANASONIC)
	C749	J0880033R	CQM-152K500HFT
	C760	JAJ00134R	CK45-R3DD102K 1N 2KV
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C964	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333753	3N3 "Y"CLASS PME294 BEABT
⚠	C999	C130753	1N0 "Y" PME294 UL BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518058	K9260M SAW DK/BG SOUND
	CP501	E518053	K3953M
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D506	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
⚠	D705	T431113	DIODE BYD33J MULL BEAB
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
	D711	OPTION	NOT FITTED
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G
	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3

	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D963	J2348921M	DIODE 1N4531
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB450	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380150	? LINEARITY COIL ISKRA
	L703	J2123781R	FILTER COIL EL101K
	L751	L380117	BRIDGE COIL 5MH
	L752	L380147	&BRIDGE COIL
⚠	L901	L210064	FIL/COIL ELF20N013A BEAB
⚠	L902	L210064	FIL/COIL ELF20N013A BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED002	T547050	&SLR37VC3F LED ROHM
	PL002	J2902264	PLG-05P 2R5V PWB
	PL100	J2902264	PLG-05P 2R5V PWB
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B

Q500	J2315891R	TRS JC548B
Q503	J2315891R	TRS JC548B
Q505	J2315891R	TRS JC548B
Q508	J2315891R	TRS JC548B
Q601	T636077	&IRFS530A ISOL SAMSUNG
Q601B	J4520889	SCREW
Q601D	J8821114	NUT 3
Q701	T633137	TRANS BF459 MULLARD/SES
Q703	J2315891R	TRS JC548B
Q751	J2315451	TRS-BU2508AF
Q751A	H235305	HEATSINK G7PS 3
Q751B	G884027	SPRING CLIP
Q901	T636077	&IRFS530A ISOL SAMSUNG
Q902	J2315921R	TRS JC558B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235417	POWER HEATSINK(COPPER)
Q903B	G884027	SPRING CLIP
Q903C	B976404	HEAT SINK COMPOUND 340
Q905	T633133	TRANS BF422 BAND MULL/AEG
Q906	J2315891R	TRS JC548B
Q907	J2315891R	TRS JC548B
Q908	J2315891R	TRS JC548B
Q950	J2315891R	TRS JC548B
Q951	T632084	BD438 TRANS'R MOTOROLA
Q952	T631265	BC546B
Q954	T633133	TRANS BF422 BAND MULL/AEG
Q957	T636069	BD909 SGS NON-IS0
Q957A	H234344	POWER HEATSINK G7PS3
Q957B	G311331	M3 FULLNUT
Q957C	B976404	HEAT SINK COMPOUND 340
Q957D	F133310	M3X10MM POZI PAN M/C SCRW
Q957E	G560331	M3 SPRING WASHER~TR FAST~
Q959	J2315891R	TRS JC548B
R001	J0700027M	100R 1/16W C/FILM 5%
R002	J0700027M	100R 1/16W C/FILM 5%
R003	J0700027M	100R 1/16W C/FILM 5%
R004	J0700027M	100R 1/16W C/FILM 5%
R005	J0700027M	100R 1/16W C/FILM 5%
R006	J0195875R	RMC73S 2A101JR
R008	J0195912R	RMC73S 2A332JR
R010	E770091	EMI FILTER MURATA
R011	E770091	EMI FILTER MURATA
R012	J0700027M	100R 1/16W C/FILM 5%
R013	J0700027M	100R 1/16W C/FILM 5%
R015	J0700059M	27K 1/16W C/FILM 5%
R016	J0700034M	330R 1/16W C/FILM 5%
R017	J0187060M	RD14S1J621JB
R019	J0700054M	10K 1/16W C/FILM 5%
R020	J0700042M	1K2 1/16W C/FILM 5%
R021	J0700045M	2K2 1/16W C/FILM 5%
R023	J0700027M	100R 1/16W C/FILM 5%
R024	J0700027M	100R 1/16W C/FILM 5%
R025	J0700027M	100R 1/16W C/FILM 5%
R026	J0700027M	100R 1/16W C/FILM 5%
R028	J0195875R	RMC73S 2A101JR
R029	J0195875R	RMC73S 2A101JR
R030	J0195875R	RMC73S 2A101JR
R031	J0700027M	100R 1/16W C/FILM 5%
R032	J0700027M	100R 1/16W C/FILM 5%
R033	J0700027M	100R 1/16W C/FILM 5%
R034	J0700027M	100R 1/16W C/FILM 5%
R037	J0700027M	100R 1/16W C/FILM 5%
R038	J0700027M	100R 1/16W C/FILM 5%
R039	J0700027M	100R 1/16W C/FILM 5%
R044	E770091	EMI FILTER MURATA
R045	E770091	EMI FILTER MURATA
R046	E770091	EMI FILTER MURATA
R047	E770091	EMI FILTER MURATA
R048	E770091	EMI FILTER MURATA
R049	J0195885R	RMC73S 2A271JR
R050	J0195885R	RMC73S 2A271JR
R051	J0195885R	RMC73S 2A271JR
R052	J0195885R	RMC73S 2A271JR
R053	J0195885R	RMC73S 2A271JR
R054	J0195885R	RMC73S 2A271JR
R055	J0195885R	RMC73S 2A271JR
R056	J0195885R	RMC73S 2A271JR
R057	J0195885R	RMC73S 2A271JR
R058	J0195885R	RMC73S 2A271JR
R059	J0195885R	RMC73S 2A271JR
R065	R222330	220R 1/4W DRG NO
R067	J0700054M	10K 1/16W C/FILM 5%
R068	J0700054M	10K 1/16W C/FILM 5%
R069	J0700054M	10K 1/16W C/FILM 5%
R071	J0700054M	10K 1/16W C/FILM 5%
R072	J0700054M	10K 1/16W C/FILM 5%
R073	J0700049M	4K7 1/16W C/FILM 5%
R074	J0700049M	4K7 1/16W C/FILM 5%
R075	J0700027M	100R 1/16W C/FILM 5%
R076	J0700027M	100R 1/16W C/FILM 5%
R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%

	R208	R110330	10R 1/4W DRG NO
	R209	R110330	10R 1/4W DRG NO
	R214	J0187086M	RD14S1J752JB
	R22	J0195250R	RMC73S 000R
	R220	J0700045M	2K2 1/16W C/FILM 5%
	R221	J0700038M	680R 1/16W C/FILM 5%
	R222	J0700027M	100R 1/16W C/FILM 5%
	R223	J0700035M	390R 1/16W C/FILM 5%
	R224	J0700046M	2K7 1/16W C/FILM 5%
	R225	J0700058M	22K 1/16W C/FILM 5%
	R226	J0700058M	22K 1/16W C/FILM 5%
	R227	J0700038M	680R 1/16W C/FILM 5%
	R228	J0700034M	330R 1/16W C/FILM 5%
	R230	J0700044M	1K8 1/16W C/FILM 5%
	R26	J0195250R	RMC73S 000R
	R27	J0195250R	RMC73S 000R
	R2700	R120330	100R 1/4W DRG NO
	R3	J0195013R	RMC73 2B102JR
	R300	R715330	75R 1/4W DRG NO
	R301	J0700054M	10K 1/16W C/FILM 5%
	R302	R715330	75R 1/4W DRG NO
	R303	J0700052M	6K8 1/16W C/FILM 5%
	R304	J0700054M	10K 1/16W C/FILM 5%
	R305	J0700067M	100K 1/16W C/FILM 5%
	R306	J0700036M	470R 1/16W C/FILM 5%
	R307	J0700036M	470R 1/16W C/FILM 5%
	R308	J0700067M	100K 1/16W C/FILM 5%
	R309	J0700054M	10K 1/16W C/FILM 5%
	R310	R120330	100R 1/4W DRG NO
	R311	R715330	75R 1/4W DRG NO
	R312	R715330	75R 1/4W DRG NO
	R313	R715330	75R 1/4W DRG NO
	R314	R120330	100R 1/4W DRG NO
	R315	R120330	100R 1/4W DRG NO
	R316	J0700052M	6K8 1/16W C/FILM 5%
	R317	J0700054M	10K 1/16W C/FILM 5%
	R318	R715330	75R 1/4W DRG NO
	R319	J0700067M	100K 1/16W C/FILM 5%
	R320	J0700036M	470R 1/16W C/FILM 5%
	R321	J0700036M	470R 1/16W C/FILM 5%
	R322	R715330	75R 1/4W DRG NO
	R323	J0700067M	100K 1/16W C/FILM 5%
	R324	J0700064M	56K 1/16W C/FILM 5%
	R325	J0700067M	100K 1/16W C/FILM 5%
	R326	J0700027M	100R 1/16W C/FILM 5%
	R327	J0700064M	56K 1/16W C/FILM 5%
	R328	J0700064M	56K 1/16W C/FILM 5%
	R329	J0700027M	100R 1/16W C/FILM 5%
	R330	J0700067M	100K 1/16W C/FILM 5%
	R331	J0700064M	56K 1/16W C/FILM 5%
	R334	R715330	75R 1/4W DRG NO
	R335	J0700027M	100R 1/16W C/FILM 5%
	R337	J0700038M	680R 1/16W C/FILM 5%
	R338	J0700058M	22K 1/16W C/FILM 5%
	R339	J0700027M	100R 1/16W C/FILM 5%
	R340	J0700054M	10K 1/16W C/FILM 5%
	R341	R110330	10R 1/4W DRG NO
	R349	J0700027M	100R 1/16W C/FILM 5%
	R350	J0700054M	10K 1/16W C/FILM 5%
	R351	J0700058M	22K 1/16W C/FILM 5%
	R352	J0700038M	680R 1/16W C/FILM 5%
	R4	J0195925R	RMC73S 2A103JR
	R400	J0700027M	100R 1/16W C/FILM 5%
	R4001	J0700054M	10K 1/16W C/FILM 5%
	R4002	J0700054M	10K 1/16W C/FILM 5%
	R4004	R132330	1K2 1/4W DRG NO
	R4005	R417330	47R 1/4W DRG NO
	R4006	R921330	910R 1/4W DRG NO
	R4007	R132330	1K2 1/4W DRG NO
⚠	R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
	R4009	R417330	47R 1/4W DRG NO
	R401	J0700027M	100R 1/16W C/FILM 5%
	R4010	J0700064M	56K 1/16W C/FILM 5%
⚠	R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
	R4014	R526330	560R 1/4W DRG NO
	R4015	R526330	560R 1/4W DRG NO
	R403	J0700054M	10K 1/16W C/FILM 5%
	R408	J0195250R	RMC73S 000R
	R410	J0700041M	1K 1/16W C/FILM 5%
	R411	J0700041M	1K 1/16W C/FILM 5%
	R412	J0700057M	18K 1/16W C/FILM 5%
	R413	J0700057M	18K 1/16W C/FILM 5%
	R414	J0700057M	18K 1/16W C/FILM 5%
	R415	J0700057M	18K 1/16W C/FILM 5%
	R416	J0195885R	RMC73S 2A271JR
	R417	J0195250R	RMC73S 000R
	R418	J0195931R	RMC73S 2A183JR
	R419	J0195931R	RMC73S 2A183JR
	R449	J0700054M	10K 1/16W C/FILM 5%
	R501	J0700035M	390R 1/16W C/FILM 5%
	R502	J0700041M	1K 1/16W C/FILM 5%
	R503	J0700027M	100R 1/16W C/FILM 5%
	R504	J0700027M	100R 1/16W C/FILM 5%
	R505	J0700032M	220R 1/16W C/FILM 5%
	R508	J0700041M	1K 1/16W C/FILM 5%
	R509U	J0700052M	6K8 1/16W C/FILM 5%
	R513	J0700041M	1K 1/16W C/FILM 5%
	R514	J0700027M	100R 1/16W C/FILM 5%
	R515	J0700027M	100R 1/16W C/FILM 5%
	R516	J0700027M	100R 1/16W C/FILM 5%
	R517	J0700052M	6K8 1/16W C/FILM 5%
	R523	J0700067M	100K 1/16W C/FILM 5%
	R524	R323330	330R 1/4W DRG NO
	R525	J0700058M	22K 1/16W C/FILM 5%
	R526	J0700058M	22K 1/16W C/FILM 5%
	R532	R128330	180R 1/4W DRG NO
	R534	J0700027M	100R 1/16W C/FILM 5%
	R536	R120330	100R 1/4W DRG NO
	R537	J0700059M	27K 1/16W C/FILM 5%
	R538	J0700063M	47K 1/16W C/FILM 5%
	R539	J0700056M	15K 1/16W C/FILM 5%
	R542	J0195941R	RMC73S 2A473JR
	R543	J0700078M	680K 1/16W C/FILM 5%
	R544	J0700072M	220K 1/16W C/FILM 5%
	R545	R349725	39K MRS16T 1% M/FILM
	R549	J0700029M	150R 1/16W C/FILM 5%
	R550	R110330	10R 1/4W DRG NO
	R551	J0187071M	RES 1K8 1/16W
	R552	J0700027M	100R 1/16W C/FILM 5%
	R560	J0195947R	RMC73S 2A823JR
	R570	J0195250R	RMC73S 000R
	R571	J0195250R	RMC73S 000R
	R600	R437330	4K7 1/4W DRG NO
	R601	R330330	3K 1/4W DRG NO
	R602	R108736	1R8 1% MFR4 M/FILM
	R603	R105330	1.5R 1/4W DRG NO
	R610	R140330	10K 1/4W DRG NO
	R612	R447330	47K 1/4W DRG NO
	R614	J0113735M	RD14S2H271JB
	R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
	R623	J0113725M	100R RES CARBON FILM 1/2W
	R701	J0140933S	RSL-472J7WS(BSR-Z)
	R704	J0700027M	100R 1/16W C/FILM 5%
	R706U	R100330	1R0 1/4W DRG NO
	R707	R437330	4K7 1/4W DRG NO
	R709	R319330	39R 1/4W DRG NO
	R714	J0113748M	RD14S2H821JB
	R715	R140570	10K 1W 5% MO1SL F
	R718	R254736	240K 1/4W M/F MFR4 1%
	R719	J0119647M	RN14S2B473FB

R724	J0110273S	RSO8B3D153JS
R725	R242571	22K 2W M02S
R726	J0113778M	RD14S2H153JB
R733	R323330	330R 1/4W DRG NO
R735	J0147622	RW99J3Y3R3KM
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147622	RW99J3Y3R3KM
R759	R437330	4K7 1/4W DRG NO
R764	R457330	470K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0700056M	15K 1/16W C/FILM 5%
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%
R955	R457725	470K 1/16W MRS16T 1% M/F
R956	R132330	1K2 1/4W DRG NO
R957	J0700049M	4K7 1/16W C/FILM 5%
R958	J0700041M	1K 1/16W C/FILM 5%
R959	R145725	15K MRS16T 1% M/FILM
R960	J0700049M	4K7 1/16W C/FILM 5%
R961	R832725	8K2 MRS16T 1% M/FILM
R962	J0700067M	100K 1/16W C/FILM 5%
R963	R252725	220K 1/16W MRS16T 1% M/F
R964	R437725	4K7 MRS16T 1% M/FILM
R966	R437725	4K7 MRS16T 1% M/FILM
R967	R000708	11.5K MRS16T 1% 1/16W
R968	R140725	10K MRS16T 1% M/FILM
R969	R140725	10K MRS16T 1% M/FILM
R970	R141725	11K MRS16T 1% M/FILM
R971	J0700054M	10K 1/16W C/FILM 5%
R972	R000709	64.9K MRS16T 1% 1/16W
R973	R941725	91K MRS16T 1% M/FILM
R974	J0147516	RES 1R 5W 7APK
R977	OPTION	NOT FITTED
R981	J0700046M	2K7 1/16W C/FILM 5%
R982	R130330	1K 1/4W DRG NO
R985	R427571	470R 2W 5% M02S F
R986	R526571	560R 2W 5% M02S F
R989	R407542	4R7 1W FF83 WELWYN
R991	J0700054M	10K 1/16W C/FILM 5%
R992	R628858	680R 4W VTM KP292 15mmP
R993	J0700041M	1K 1/16W C/FILM 5%
⚠ R999	R170727	10M 1W VR68 UL BEAB
⚠ RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
SW001	E139408	4 WAY TACT SWITCH~ALPS~
⚠ SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠ T701	J2436626	FBT HFL1735J - BEABT
T701A	G201316	M3 X 16 SCREW
T701B	G201316	M3 X 16 SCREW
T701C	G201316	M3 X 16 SCREW
T701D	N332067	SPACER
T701E	N332067	SPACER
T701F	N332067	SPACER
T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠ T900	L380128	A7 32" ETD42 PAN BEAB
TH900	E441044	PTC TYPE 2322-662-96609
U201	E710060	& UE25-B57D UK (VA)
VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
W003	EC551505	1/0.7MM S000010
W012	EC520802	7/0.2MM S000029
W2700	W024001	0.56ML SFT TIN'D COP WIRE
W800	EC5A400A	7/0.2MM S000030
X001	E516030F	12MHz X'TAL NDK 5MM LEG
X400	E516056F	24.576MHZ CRYSTAL
X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
X502	J2791502	X'TAL 3.58MHZ NDK
Z518	B975476	3748 JET-MELT ADHESIVE 3M
Z518A	W470200	1MM 1/D SLEEVING BLACK
Z518B	W470200	1MM 1/D SLEEVING BLACK
Z518C	B912319	WHITE GLASS NO69X19X33
Z538	B975476	3748 JET-MELT ADHESIVE 3M
Z538A	W470200	1MM 1/D SLEEVING BLACK
Z538B	W470200	1MM 1/D SLEEVING BLACK
Z538C	B912319	WHITE GLASS NO69X19X33
Z901BU	J9451136	UL CSA TUBE N08
Z904	B912312	WHITE TAPE N069X12X33
Z905A	W470200	1MM 1/D SLEEVING BLACK
Z905B	W470200	1MM 1/D SLEEVING BLACK
ZC706U	B912312	WHITE TAPE N069X12X33
ZD001	T536179	BZX79C 6V2~PHILIPS~
ZD003	T536225	BZX79B 6V2 ~PHILIPS~
ZD200	T536215	BZX 79C 33V~PHILIPS~
ZD4000	T536177	BZX79C 12V~PHILIPS~
ZD4001	T536177	BZX79C 12V~PHILIPS~
ZD4002	T536171	BZX79C36V~PHILIPS~
ZD4003	T536171	BZX79C36V~PHILIPS~
ZD4004	T536171	BZX79C36V~PHILIPS~
ZD4006	T536215	BZX 79C 33V~PHILIPS~
ZD4500	T536177	BZX79C 12V~PHILIPS~
ZD4501	T536177	BZX79C 12V~PHILIPS~
ZD4502	T536177	BZX79C 12V~PHILIPS~
ZD4503	T536177	BZX79C 12V~PHILIPS~
ZD501	T536186	BZX79C 8V2~PHILIPS~
ZD502	T536186	BZX79C 8V2~PHILIPS~
ZD503	T536186	BZX79C 8V2~PHILIPS~
ZD504	T536284	BZX284-C9V1
ZD505	T536184	BZX79C 9V1~PHILIPS~
ZD506	T536184	BZX79C 9V1~PHILIPS~
ZD507	T536184	BZX79C 9V1~PHILIPS~
ZD508	T536280	BZX284-C6V2
ZD600	T536184	BZX79C 9V1~PHILIPS~
ZD602	T536174	BZX79C 5V1~PHILIPS~
ZD603	T536259	BZX79C56V
ZD610	T536237	BZX79B24V~PHILIPS~
ZD612	T536184	BZX79C 9V1~PHILIPS~

ZD700	T536236	BZX79B22V~PHILIPS~
ZD704	T536246	ZENER 18V 1.3W MULL
ZD705	T536215	BZX 79C 33V~PHILIPS~
ZD706	T536185	BZX79C 5V6~PHILIPS~
ZD717	J2339251M	HZS36-ILT
ZD902	T536246	ZENER 18V 1.3W MULL
ZD903	T536266	BZV85-C27V
ZD904	T536176	BZX 79C10V~PHILIPS~
ZD950	T536207	DIODE BZV10 REF MULLARD
ZD951	OPTION	NOT FITTED
ZD957	T536226	BZX79B6V8
ZD970	J2344122M	PGKE180AG23
ZR706U	B912312	WHITE TAPE N069X12X33

A528210		**MAIN BOARD**	
	#400	F823412	M4X12 PHB TIGHT SCR ~TR~
	#401	G202402	M3X8 BRAZIER S-TITE SCR
	#5000	N936190	A7 CHASSIS FRAME
	#5001	JBM00041	FERRITE CORES BP53RB
	#5030	G864008	CABLE TIE T18L H.S.
	#5060	G863063	RIVET
	#7100	B912319	WHITE GLASS NO69X19X33
	A02	A528140	A7 2PIN DIN SKT ASSY
⚠	B001	PC50302	A7 32" 16;9 M/PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C208	OPTION	NOT FITTED
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C226	OPTION	NOT FITTED
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299926F	CQ93E2D104KPF
	C2703	J0299930F	CQ93E2D224KPF
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C430	J0228736R	CC73SSL1H180JR
	C432	C353883	GRM40Y5V334Z16PT
	C450	J0880194R	0.1UF 50V +-5% (100N)
	C4501	J0893048R	CKM-223K500B-CNT2125
	C4502	J0800326R	CEL-101M160WMFT
	C4503	J0893048R	CKM-223K500B-CNT2125
	C4504	J0800326R	CEL-101M160WMFT
	C4505	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4506	J0800326R	CEL-101M160WMFT
	C4507	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4508	J0800326R	CEL-101M160WMFT
	C451	J0800324R	C/ELEC 100UF M SMG 6.3V
	C452	J0880194R	0.1UF 50V +-5% (100N)
	C453	J0800324R	C/ELEC 100UF M SMG 6.3V
	C454	J0880194R	0.1UF 50V +-5% (100N)
	C455	J0800324R	C/ELEC 100UF M SMG 6.3V
	C474	J0800291R	CAP ELEC 10uF 16V SMG
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT
	C518	J0800371	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT

	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C533	C506182	5.6PF 50V 2% DRG NO
	C537	J0893048R	CKM-223K500B-CNT2125
	C538	J0800086	2200u/10V ELEC
	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125
	C546	C150711	CAP 100N 36521104 100V POL
	C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	J0893035R	CKM--222K500B CNT2125
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E
	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C700U	J0244202F	CK45R3D471K
	C701	J0243507R	CK45B2H331KB
	C702	J0253971F	CEO4W2E4R7HRF
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	JAJ00141F	CC-332K202R-D 10P 3N3 2KV
	C705	J0299993F	CAP 18NF 5% 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	C333760	3N3 1.6KV R/EVOX PHE428
	C708	J0245612F	CK45B3A472K
	C709	J0253953R	CE04W2C2R2M
	C710	J0253953R	CE04W2C2R2M
	C711	J0299933F	POLY CAP FILM 390N 200V
	C712	J0299932F	CQ93E2D334KPF
	C713	J0299932F	CQ93E2D334KPF
	C714	J0299931F	POLY CAP 270N 200V
	C715	J0243512R	CK45B2H821KB
	C716	C140707	CAP 10N 365-51103 MULARD
	C717	J0244211R	CK45B53D102K
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800303R	ELECT CAP 22UF 50V SMG
	C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C737	C160708	1UF +-10% 250V 368-45105
	C739	OPTION	NOT FITTED
	C744	J0880048R	CQT223K50MB (PANASONIC)
	C749	J0880033R	CQM-152K500HFT
	C760	JAJ00134R	CK45-R3DD102K 1N 2KV
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C964	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C965	J0800294R	ELECT CAP 10UF 50V SMG
	C966	J0800329R	ELECT CAP 100UF 50V SMG
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333774	Y CAP 3N3 SIEMENS BEABT
⚠	C999	C130774	Y CAP 1N SIEMENS BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518058	K9260M SAW DK/BG SOUND
	CP501	E518053	K3953M
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D506	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
⚠	D705	T431113	DIODE BYD33J MULL BEAB
	D706	T431117F	DIODE BY228 P/F PHILIPS

	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
	D711	OPTION	NOT FITTED
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G
	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D962	J2348921M	DIODE 1N4531
	D963	J2348921M	DIODE 1N4531
	D964	J2343962M	MPG06G
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	E006	E846903	2 WAY LEAD
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E401	E846965	&LEAD (DIN SOCKET)
	E4500	E826157	QUAD PHONO SKT 86 SER
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
	E903	E826148	PHONO SKT BLACK S000043
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB450	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB451	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB452	E770091	EMI FILTER MURATA
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC450	T900724	YSS241-F/YSS241B-F
	IC453	T900765	DOLBY IC YSS909-M
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC953	T900695	L78M18CV (500mA)
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R

	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L4500	J2122943M	AXIAL COIL 10UH-J
	L4501	J2122943M	AXIAL COIL 10UH-J
	L4502	J2122943M	AXIAL COIL 10UH-J
	L4503	J2122943M	AXIAL COIL 10UH-J
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380150	? LINEARITY COIL ISKRA
	L703	J2123781R	FILTER COIL EL101K
	L751	L380117	BRIDGE COIL 5MH
	L752	L380147	&BRIDGE COIL
⚠	L901	L210068	M/FILTER 97192 RIFA BEAB
⚠	L902	L210068	M/FILTER 97192 RIFA BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED002	T547050	&SLR37VC3F LED ROHM
	PL006	J2902261	PLG-02P2R5VPWB
	PL007	J2902261	PLG-02P2R5VPWB
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q4503	W024001	0.56ML SFT TIN'D COP WIRE
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B
	Q508	J2315891R	TRS JC548B
	Q601	T636077	&IRFS530A ISOL SAMSUNG
	Q601B	J4520889	SCREW
	Q601D	J8821114	NUT 3
	Q701	T633137	TRANS BF459 MULLARD/SES
	Q703	J2315891R	TRS JC548B
	Q751	J2315451	TRS-BU2508AF
	Q751A	H235305	HEATSINK G7PS 3
	Q751B	G884027	SPRING CLIP
	Q901	T636077	&IRFS530A ISOL SAMSUNG
	Q902	J2315921R	TRS JC558B
	Q903	T636072	BUT12AF NON SELECTED
	Q903A	H235417	POWER HEATSINK(COPPER)
	Q903B	G884027	SPRING CLIP
	Q903C	B976404	HEAT SINK COMPOUND 340
	Q905	T633133	TRANS BF422 BAND MULL/AEG
	Q906	J2315891R	TRS JC548B
	Q907	J2315891R	TRS JC548B
	Q908	J2315891R	TRS JC548B
	Q950	J2315891R	TRS JC548B
	Q951	T632084	BD438 TRANS'R MOTOROLA
	Q952	T631265	BC546B
	Q954	T633133	TRANS BF422 BAND MULL/AEG
	Q957	T636069	BD909 SGS NON-IS0
	Q957A	H234344	POWER HEATSINK G7PS3
	Q957B	G311331	M3 FULLNUT
	Q957C	B976404	HEAT SINK COMPOUND 340
	Q957D	F133310	M3X10MM POZI PAN M/C SCRW
	Q957E	G560331	M3 SPRING WASHER~TR FAST~
	Q959	J2315891R	TRS JC548B
	R001	J0700027M	100R 1/16W C/FILM 5%
	R002	J0700027M	100R 1/16W C/FILM 5%
	R003	J0700027M	100R 1/16W C/FILM 5%
	R004	J0700027M	100R 1/16W C/FILM 5%
	R005	J0700027M	100R 1/16W C/FILM 5%
	R006	J0195875R	RMC73S 2A101JR
	R008	J0195912R	RMC73S 2A332JR
	R010	E770091	EMI FILTER MURATA
	R011	E770091	EMI FILTER MURATA
	R012	J0700027M	100R 1/16W C/FILM 5%
	R013	J0700027M	100R 1/16W C/FILM 5%
	R015	J0700059M	27K 1/16W C/FILM 5%
	R016	J0700034M	330R 1/16W C/FILM 5%
	R017	J0187060M	RD14S1J621JB
	R019	J0700054M	10K 1/16W C/FILM 5%
	R020	J0700042M	1K2 1/16W C/FILM 5%
	R021	J0700045M	2K2 1/16W C/FILM 5%
	R023	J0700027M	100R 1/16W C/FILM 5%
	R024	J0700027M	100R 1/16W C/FILM 5%
	R025	J0700027M	100R 1/16W C/FILM 5%
	R026	J0700027M	100R 1/16W C/FILM 5%
	R028	J0195875R	RMC73S 2A101JR
	R029	J0195875R	RMC73S 2A101JR
	R030	J0195875R	RMC73S 2A101JR
	R031	J0700027M	100R 1/16W C/FILM 5%
	R032	J0700027M	100R 1/16W C/FILM 5%
	R033	J0700027M	100R 1/16W C/FILM 5%
	R034	J0700027M	100R 1/16W C/FILM 5%
	R037	J0700027M	100R 1/16W C/FILM 5%
	R038	J0700027M	100R 1/16W C/FILM 5%
	R039	J0700027M	100R 1/16W C/FILM 5%
	R044	E770091	EMI FILTER MURATA
	R045	E770091	EMI FILTER MURATA
	R046	E770091	EMI FILTER MURATA
	R047	E770091	EMI FILTER MURATA
	R048	E770091	EMI FILTER MURATA
	R049	J0195885R	RMC73S 2A271JR
	R050	J0195885R	RMC73S 2A271JR
	R051	J0195885R	RMC73S 2A271JR
	R052	J0195885R	RMC73S 2A271JR
	R053	J0195885R	RMC73S 2A271JR
	R054	J0195885R	RMC73S 2A271JR
	R055	J0195885R	RMC73S 2A271JR
	R056	J0195885R	RMC73S 2A271JR
	R057	J0195885R	RMC73S 2A271JR
	R058	J0195885R	RMC73S 2A271JR
	R059	J0195885R	RMC73S 2A271JR
	R065	R222330	220R 1/4W DRG NO
	R067	J0700054M	10K 1/16W C/FILM 5%
	R068	J0700054M	10K 1/16W C/FILM 5%
	R069	J0700054M	10K 1/16W C/FILM 5%
	R071	J0700054M	10K 1/16W C/FILM 5%
	R072	J0700054M	10K 1/16W C/FILM 5%
	R073	J0700049M	4K7 1/16W C/FILM 5%

R074	J0700049M	4K7 1/16W C/FILM 5%
R075	J0700027M	100R 1/16W C/FILM 5%
R076	J0700027M	100R 1/16W C/FILM 5%
R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R214	J0187086M	RD14S1J752JB
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700044M	1K8 1/16W C/FILM 5%
R2700	R120330	100R 1/4W DRG NO
R3	J0195013R	RMC73 2B102JR
R30	J0195881R	RMC73S 2A181JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO
R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0700057M	18K 1/16W C/FILM 5%
R414	J0700057M	18K 1/16W C/FILM 5%
R415	J0700057M	18K 1/16W C/FILM 5%

R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R430	E770091	EMI FILTER MURATA
R431	J0195881R	RMC73S 2A181JR
R432	J0195881R	RMC73S 2A181JR
R433	J0195881R	RMC73S 2A181JR
R434	J0195881R	RMC73S 2A181JR
R435	J0195881R	RMC73S 2A181JR
R436	J0195881R	RMC73S 2A181JR
R437	J0195881R	RMC73S 2A181JR
R438	J0195881R	RMC73S 2A181JR
R440	E770091	EMI FILTER MURATA
R441	J0195881R	RMC73S 2A181JR
R449	J0700054M	10K 1/16W C/FILM 5%
R450	J0700027M	100R 1/16W C/FILM 5%
R4501	J0700027M	100R 1/16W C/FILM 5%
R4502	J0700027M	100R 1/16W C/FILM 5%
R4503	J0700027M	100R 1/16W C/FILM 5%
R4504	J0700027M	100R 1/16W C/FILM 5%
R4509	J0700067M	100K 1/16W C/FILM 5%
R451	J0700027M	100R 1/16W C/FILM 5%
R4510	J0195950R	RMC73S 2A104JR
R4511	J0195950R	RMC73S 2A104JR
R4512	J0195950R	RMC73S 2A104JR
R4540	J0195250R	RMC73S 000R
R4541	J0195250R	RMC73S 000R
R459	J0700054M	10K 1/16W C/FILM 5%
R464	J0700027M	100R 1/16W C/FILM 5%
R465	J0700027M	100R 1/16W C/FILM 5%
R466	J0700054M	10K 1/16W C/FILM 5%
R469	J0700027M	100R 1/16W C/FILM 5%
R470	J0700054M	10K 1/16W C/FILM 5%
R471	J0700054M	10K 1/16W C/FILM 5%
R472	J0700054M	10K 1/16W C/FILM 5%
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700032M	220R 1/16W C/FILM 5%
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%
R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R532	R128330	180R 1/4W DRG NO
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	J0700078M	680K 1/16W C/FILM 5%
R544	J0700072M	220K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700029M	150R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R
R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R108736	1R8 1% MFR4 M/FILM
R603	R105330	1.5R 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
R623	J0113725M	100R RES CARBON FILM 1/2W
R701	J0140933S	RSL-472J7WS(BSR-Z)
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R242571	22K 2W M02S
R726	J0113778M	RD14S2H153JB
R733	R323330	330R 1/4W DRG NO
R735	J0147622	RW99J3Y3R3KM
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147622	RW99J3Y3R3KM
R752	OPTION	NOT FITTED
R759	R437330	4K7 1/4W DRG NO
R764	R457330	470K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0700056M	15K 1/16W C/FILM 5%
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%

	R955	R457725	470K 1/16W MRS16T 1% M/F
	R956	R132330	1K2 1/4W DRG NO
	R957	J0700049M	4K7 1/16W C/FILM 5%
	R958	J0700041M	1K 1/16W C/FILM 5%
	R959	R145725	15K MRS16T 1% M/FILM
	R960	J0700049M	4K7 1/16W C/FILM 5%
	R961	R832725	8K2 MRS16T 1% M/FILM
	R962	J0700067M	100K 1/16W C/FILM 5%
	R963	R252725	220K 1/16W MRS16T 1% M/F
	R964	R437725	4K7 MRS16T 1% M/FILM
	R966	R437725	4K7 MRS16T 1% M/FILM
	R967	R000708	11.5K MRS16T 1% 1/16W
	R968	R140725	10K MRS16T 1% M/FILM
	R969	R140725	10K MRS16T 1% M/FILM
	R970	R141725	11K MRS16T 1% M/FILM
	R971	J0700054M	10K 1/16W C/FILM 5%
	R972	R000709	64.9K MRS16T 1% 1/16W
	R973	R941725	91K MRS16T 1% M/FILM
	R974	J0147516	RES 1R 5W 7APK
	R975	J0147054AF	RW99J3D180KAF
	R977	OPTION	NOT FITTED
	R981	J0700046M	2K7 1/16W C/FILM 5%
	R982	R130330	1K 1/4W DRG NO
	R985	R427571	470R 2W 5% M02S F
	R986	R526571	560R 2W 5% M02S F
	R989	R407542	4R7 1W FF83 WELWYN
	R991	J0700054M	10K 1/16W C/FILM 5%
	R992	R628858	680R 4W VTM KP292 15mmP
	R993	J0700041M	1K 1/16W C/FILM 5%
⚠	R999	R170727	10M 1W VR68 UL BEAB
⚠	RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
	SW001	E139408	4 WAY TACT SWITCH~ALPS~
⚠	SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠	T701	J2436626	FBT HFL1735J - BEABT
	T701A	G201316	M3 X 16 SCREW
	T701B	G201316	M3 X 16 SCREW
	T701C	G201316	M3 X 16 SCREW
	T701D	N332067	SPACER
	T701E	N332067	SPACER
	T701F	N332067	SPACER
	T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠	T900	L380128	A7 32" ETD42 PAN BEAB
	TH900	E441044	PTC TYPE 2322-662-96609
	U201	E710060	& UE25-B57D UK (VA)
	VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
	VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
	W003	EC551505	1/0.7MM S000010
	W012	EC520802	7/0.2MM S000029
	W2700	W024001	0.56ML SFT TIN'D COP WIRE
	W800	EC5A400A	7/0.2MM S000030
	X001	E516030F	12MHz X'TAL NDK 5MM LEG
	X400	E516056F	24.576MHZ CRYSTAL
	X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
	X502	J2791502	X'TAL 3.58MHZ NDK
	Z901BU	J9451136	UL CSA TUBE N08
	Z904	B912312	WHITE TAPE N069X12X33
	Z905A	W470200	1MM 1/D SLEEVING BLACK
	Z905B	W470200	1MM 1/D SLEEVING BLACK
	ZC706U	B912312	WHITE TAPE N069X12X33
	ZD001	T536179	BZX79C 6V2~PHILIPS~
	ZD003	T536225	BZX79B 6V2 ~PHILIPS~
	ZD200	T536215	BZX 79C 33V~PHILIPS~
	ZD4000	T536177	BZX79C 12V~PHILIPS~
	ZD4001	T536177	BZX79C 12V~PHILIPS~
	ZD4002	T536171	BZX79C36V~PHILIPS~
	ZD4003	T536171	BZX79C36V~PHILIPS~
	ZD4004	T536171	BZX79C36V~PHILIPS~
	ZD4006	T536215	BZX 79C 33V~PHILIPS~
	ZD4500	T536177	BZX79C 12V~PHILIPS~
	ZD4501	T536177	BZX79C 12V~PHILIPS~
	ZD4502	T536177	BZX79C 12V~PHILIPS~
	ZD4503	T536177	BZX79C 12V~PHILIPS~
	ZD501	T536186	BZX79C 8V2~PHILIPS~
	ZD502	T536186	BZX79C 8V2~PHILIPS~
	ZD503	T536186	BZX79C 8V2~PHILIPS~
	ZD504	T536284	BZX284-C9V1
	ZD505	T536184	BZX79C 9V1~PHILIPS~
	ZD506	T536184	BZX79C 9V1~PHILIPS~
	ZD507	T536184	BZX79C 9V1~PHILIPS~
	ZD508	T536280	BZX284-C6V2
	ZD600	T536184	BZX79C 9V1~PHILIPS~
	ZD602	T536174	BZX79C 5V1~PHILIPS~
	ZD603	T536259	BZX79C56V
	ZD610	T536237	BZX79B24V~PHILIPS~
	ZD612	T536184	BZX79C 9V1~PHILIPS~
	ZD700	T536236	BZX79B22V~PHILIPS~
	ZD704	T536246	ZENER 18V 1.3W MULL
	ZD705	T536215	BZX 79C 33V~PHILIPS~
	ZD706	T536185	BZX79C 5V6~PHILIPS~
	ZD717	J2339251M	HZS36-ILT
	ZD902	T536246	ZENER 18V 1.3W MULL
	ZD903	T536266	BZV85-C27V
	ZD904	T536176	BZX 79C10V~PHILIPS~
	ZD950	T536207	DIODE BZV10 REF MULLARD
	ZD957	T536226	BZX79B6V8
	ZD970	J2344122M	PGKE180AG23
	ZR706U	B912312	WHITE TAPE N069X12X33

A528220		**MAIN BOARD ASSY**	
	#5000	N936191	A7 CHASSIS FRAME DOLBY
	#5001	JBM00041	FERRITE CORES BP53RB
	#5030	G864008	CABLE TIE T18L H.S.
	#5060	G863063	RIVET
	#701	J3333961	GROUNDING SPRING
	#7100	B912319	WHITE GLASS NO69X19X33
⚠	B001	PC50302	A7 32" 16;9 M/PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C205	J0880194R	0.1UF 50V +-5% (100N)
	C206	J0880044R	CAP POLYESTER 0.01UF K50V
	C207	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C209	J0890118R	CCL-220J500CHDFT -D3
	C210	J0880194R	0.1UF 50V +-5% (100N)
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C213	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C214	J0800294R	ELECT CAP 10UF 50V SMG
	C215	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C216	J0880044R	CAP POLYESTER 0.01UF K50V
	C216A	J0228058R	CC73SCH1H151JR 150PF
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C227U	J0890123R	CC45CH1H470JB ~MURATA~
	C228	J0890123R	CC45CH1H470JB ~MURATA~
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299926F	CQ93E2D104KPF
	C2703	J0299930F	CQ93E2D224KPF
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308U	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311U	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C411	C457759	470N 63V POLY MMK5 RIFA/E
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C430	J0228736R	CC73SSL1H180JR
	C432	C353883	GRM40Y5V334Z16PT
	C450	J0880194R	0.1UF 50V +-5% (100N)
	C4501	J0893048R	CKM-223K500B-CNT2125
	C4502	J0800326R	CEL-101M160WMFT
	C4503	J0893048R	CKM-223K500B-CNT2125
	C4504	J0800326R	CEL-101M160WMFT
	C4505	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4506	J0800326R	CEL-101M160WMFT
	C4507	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4508	J0800326R	CEL-101M160WMFT
	C451	J0800324R	C/ELEC 100UF M SMG 6.3V
	C452	J0880194R	0.1UF 50V +-5% (100N)
	C453	J0800324R	C/ELEC 100UF M SMG 6.3V
	C454	J0880194R	0.1UF 50V +-5% (100N)
	C455	J0800324R	C/ELEC 100UF M SMG 6.3V
	C473	OPTION	NOT FITTED
	C474	J0800291R	CAP ELEC 10uF 16V SMG
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT

	C518	J0800371	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT
	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C532	OPTION	NOT FITTED
	C533	C506182	5.6PF 50V 2% DRG NO
	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125
	C546	C150711	CAP 100N 36521104 100V POL
	C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	C457883	GRM40Y5V474Z16PT
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E
	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C700U	J0244202F	CK45R3D471K
	C701	J0243507R	CK45B2H331KB
	C702	J0257540F	ELEC CAP 4U7 250V
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	JAJ00141F	CC-332K202R-D 10P 3N3 2KV
	C705	J0299993F	CAP 18NF 5% 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	C333760	3N3 1.6KV R/EVOX PHE428
	C708	J0245612F	CK45B3A472K
	C709	J0253953R	CE04W2C2R2M
	C710	J0253953R	CE04W2C2R2M
	C711	J0299933F	POLY CAP FILM 390N 200V
	C712	J0299932F	CQ93E2D334KPF
	C713	J0299932F	CQ93E2D334KPF
	C714	J0299931F	POLY CAP 270N 200V
	C715	J0243512R	CK45B2H821KB
	C716	C140707	CAP 10N 365-51103 MULARD
	C717	J0244211R	CK45B53D102K
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800303R	ELECT CAP 22UF 50V SMG
	C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C737	C160708	1UF +-10% 250V 368-45105
	C744	J0880048R	CQT223K50MB (PANASONIC)
	C749	J0880033R	CQM-152K500HFT
	C760U	JAJ00134R	CK45-R3DD102K 1N 2KV
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C964	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C965	J0800294R	ELECT CAP 10UF 50V SMG
	C966	J0800329R	ELECT CAP 100UF 50V SMG
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333753	3N3 "Y"CLASS PME294 BEABT
⚠	C999	C130753	1N0 "Y" PME294 UL BEABT
	CLIP	N235034	HEATSINK CLIP
	CP201	J2305541	SAW (L9453)
	CP202	E518050	G9251M SAW B/G SOUND
	CP501	E518068	SAW G3967M
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D202	J2348921M	DIODE 1N4531
	D203	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G

⚠	D705	T431113	DIODE BYD33J MULL BEAB
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
	D711	OPTION	NOT FITTED
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G
	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D962	J2348921M	DIODE 1N4531
	D963	J2348921M	DIODE 1N4531
	D964	J2343962M	MPG06G
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	DRG ASSY	A527900	A7 UP ISS DRWG ASSY
	E006	E846903	2 WAY LEAD
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E4500	E826157	QUAD PHONO SKT 86 SER
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
	E903	E826148	PHONO SKT BLACK S000043
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB3	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB450	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB451	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB452	E770091	EMI FILTER MURATA
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC201	J2004461	ICL-TDA3843
	IC202	T900601	TDA 9802 MULTI PLL DMODC
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC450	T900724	YSS241-F/YSS241B-F
	IC453	T900765	DOLBY IC YSS909-M
	IC501	T900766	TDA8844/N2C
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC953	T900695	L78M18CV (500mA)
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L010	J2123103M	LAL 02 AXIAL COIL 10uH

	L011	J2123103M	LAL 02 AXIAL COIL 10uH
	L012	J2123103M	LAL 02 AXIAL COIL 10uH
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L4500	J2122943M	AXIAL COIL 10UH-J
	L4501	J2122943M	AXIAL COIL 10UH-J
	L4502	J2122943M	AXIAL COIL 10UH-J
	L4503	J2122943M	AXIAL COIL 10UH-J
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380150	? LINEARITY COIL ISKRA
	L703	J2123781R	FILTER COIL EL101K
	L751	L380117	BRIDGE COIL 5MH
	L752	L380147	&BRIDGE COIL
⚠	L901	L210064	FIL/COIL ELF20N013A BEAB
⚠	L902	L210064	FIL/COIL ELF20N013A BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED002	T547050	&SLR37VC3F LED ROHM
	PL006	J2902261	PLG-02P2R5VPWB
	PL007	J2902261	PLG-02P2R5VPWB
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q200	T633151	BF240 PHILIPS
	Q201	J2315891R	TRS JC548B
	Q202	T631300	TRANS UN4213 PANASONIC
	Q203	T631300	TRANS UN4213 PANASONIC
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q4503	W024001	0.56ML SFT TIN'D COP WIRE
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B
	Q508	J2315891R	TRS JC548B
	Q601	T636077	&IRFS530A ISOL SAMSUNG
	Q601B	J4520889	SCREW
	Q601D	J8821114	NUT 3
	Q701	T633137	TRANS BF459 MULLARD/SES
	Q703	J2315891R	TRS JC548B
	Q751	J2315451	TRS-BU2508AF
	Q751A	H235305	HEATSINK G7PS 3
	Q751B	G884027	SPRING CLIP
	Q901	T636077	&IRFS530A ISOL SAMSUNG
	Q902	J2315921R	TRS JC558B
	Q903	T636072	BUT12AF NON SELECTED
	Q903A	H235417	POWER HEATSINK(COPPER)
	Q903B	G884027	SPRING CLIP
	Q903C	B976404	HEAT SINK COMPOUND 340
	Q905	T633133	TRANS BF422 BAND MULL/AEG
	Q906	J2315891R	TRS JC548B
	Q907	J2315891R	TRS JC548B
	Q908	J2315891R	TRS JC548B
	Q950	J2315891R	TRS JC548B
	Q951	T632084	BD438 TRANS'R MOTOROLA
	Q952	T631265	BC546B
	Q954	T633133	TRANS BF422 BAND MULL/AEG
	Q957	T636069	BD909 SGS NON-IS0
	Q957A	H234344	POWER HEATSINK G7PS3
	Q957B	G311331	M3 FULLNUT
	Q957C	B976404	HEAT SINK COMPOUND 340
	Q957D	F133310	M3X10MM POZI PAN M/C SCRW
	Q957E	G560331	M3 SPRING WASHER~TR FAST~
	Q959	J2315891R	TRS JC548B
	R001	J0700027M	100R 1/16W C/FILM 5%
	R002	J0700027M	100R 1/16W C/FILM 5%
	R003	J0700027M	100R 1/16W C/FILM 5%
	R004	J0700027M	100R 1/16W C/FILM 5%
	R005	J0700027M	100R 1/16W C/FILM 5%
	R006	J0195875R	RMC73S 2A101JR
	R008	J0195912R	RMC73S 2A332JR
	R010	E770091	EMI FILTER MURATA
	R011	E770091	EMI FILTER MURATA
	R012	J0700027M	100R 1/16W C/FILM 5%
	R013	J0700027M	100R 1/16W C/FILM 5%
	R015	J0700059M	27K 1/16W C/FILM 5%
	R016	J0700034M	330R 1/16W C/FILM 5%
	R017	J0187060M	RD14S1J621JB
	R019	J0700054M	10K 1/16W C/FILM 5%
	R020	J0700042M	1K2 1/16W C/FILM 5%
	R021	J0700045M	2K2 1/16W C/FILM 5%
	R023	J0700027M	100R 1/16W C/FILM 5%
	R024	J0700027M	100R 1/16W C/FILM 5%
	R025	J0700027M	100R 1/16W C/FILM 5%
	R026	J0700027M	100R 1/16W C/FILM 5%
	R028	J0195875R	RMC73S 2A101JR
	R029	J0195875R	RMC73S 2A101JR
	R030	J0195875R	RMC73S 2A101JR
	R031	J0700027M	100R 1/16W C/FILM 5%
	R032	J0700027M	100R 1/16W C/FILM 5%
	R033	J0700027M	100R 1/16W C/FILM 5%
	R034	J0700027M	100R 1/16W C/FILM 5%
	R037	J0700027M	100R 1/16W C/FILM 5%
	R038	J0700027M	100R 1/16W C/FILM 5%
	R039	J0700027M	100R 1/16W C/FILM 5%
	R044	E770091	EMI FILTER MURATA
	R045	E770091	EMI FILTER MURATA
	R046	E770091	EMI FILTER MURATA
	R047	E770091	EMI FILTER MURATA
	R048	E770091	EMI FILTER MURATA
	R049	J0195885R	RMC73S 2A271JR
	R050	J0195885R	RMC73S 2A271JR
	R051	J0195885R	RMC73S 2A271JR
	R052	J0195885R	RMC73S 2A271JR
	R053	J0195885R	RMC73S 2A271JR
	R054	J0195885R	RMC73S 2A271JR
	R055	J0195885R	RMC73S 2A271JR
	R056	J0195885R	RMC73S 2A271JR
	R057	J0195885R	RMC73S 2A271JR
	R058	J0195885R	RMC73S 2A271JR
	R059	J0195885R	RMC73S 2A271JR
	R065	R222330	220R 1/4W DRG NO
	R067	J0700054M	10K 1/16W C/FILM 5%
	R068	J0700054M	10K 1/16W C/FILM 5%
	R069	J0700054M	10K 1/16W C/FILM 5%
	R071	J0700054M	10K 1/16W C/FILM 5%
	R072	J0700054M	10K 1/16W C/FILM 5%

R073	J0700049M	4K7 1/16W C/FILM 5%
R074	J0700049M	4K7 1/16W C/FILM 5%
R075	J0700027M	100R 1/16W C/FILM 5%
R076	J0700027M	100R 1/16W C/FILM 5%
R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R156	J0700049M	4K7 1/16W C/FILM 5%
R157	J0700049M	4K7 1/16W C/FILM 5%
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R210	J0700027M	100R 1/16W C/FILM 5%
R211	J0700033M	270R 1/16W C/FILM 5%
R212	J0700049M	4K7 1/16W C/FILM 5%
R212A	J0700041M	1K 1/16W C/FILM 5%
R213	J0700027M	100R 1/16W C/FILM 5%
R214	J0187086M	RD14S1J752JB
R215	J0700027M	100R 1/16W C/FILM 5%
R216	J0700038M	680R 1/16W C/FILM 5%
R217	J0700046M	2K7 1/16W C/FILM 5%
R218	J0700046M	2K7 1/16W C/FILM 5%
R219	J0700043M	1K5 1/16W C/FILM 5%
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700047M	3K3 1/16W C/FILM 5%
R2700	R120330	100R 1/4W DRG NO
R3	J0195013R	RMC73 2B102JR
R30	J0195881R	RMC73S 2A181JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO

R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0187092M	RD14S1J133JB
R414	J0187092M	RD14S1J133JB
R415	J0700057M	18K 1/16W C/FILM 5%
R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R430	E770091	EMI FILTER MURATA
R431	J0195881R	RMC73S 2A181JR
R432	J0195881R	RMC73S 2A181JR
R433	J0195881R	RMC73S 2A181JR
R434	J0195881R	RMC73S 2A181JR
R435	J0195881R	RMC73S 2A181JR
R436	J0195881R	RMC73S 2A181JR
R437	J0195881R	RMC73S 2A181JR
R438	J0195881R	RMC73S 2A181JR
R440	E770091	EMI FILTER MURATA
R441	J0195881R	RMC73S 2A181JR
R449	J0700054M	10K 1/16W C/FILM 5%
R450	J0700027M	100R 1/16W C/FILM 5%
R4501	J0700027M	100R 1/16W C/FILM 5%
R4502	J0700027M	100R 1/16W C/FILM 5%
R4503	J0700027M	100R 1/16W C/FILM 5%
R4504	J0700027M	100R 1/16W C/FILM 5%
R4509	J0700067M	100K 1/16W C/FILM 5%
R451	J0700027M	100R 1/16W C/FILM 5%
R4510	J0195950R	RMC73S 2A104JR
R4511	J0195950R	RMC73S 2A104JR
R4512	J0195950R	RMC73S 2A104JR
R4540	J0195250R	RMC73S 000R
R4541	J0195250R	RMC73S 000R
R459	J0700054M	10K 1/16W C/FILM 5%
R464	J0700027M	100R 1/16W C/FILM 5%
R465	J0700027M	100R 1/16W C/FILM 5%
R466	J0700054M	10K 1/16W C/FILM 5%
R469	J0700027M	100R 1/16W C/FILM 5%
R470	J0700054M	10K 1/16W C/FILM 5%
R471	J0700054M	10K 1/16W C/FILM 5%
R472	J0700054M	10K 1/16W C/FILM 5%
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700031M	180R 1/16W C/FILM 5%
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%
R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R532	R128330	180R 1/4W DRG NO
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	J0700078M	680K 1/16W C/FILM 5%
R544	J0700072M	220K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700031M	180R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R
R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R108736	1R8 1% MFR4 M/FILM
R603	R105330	1.5R 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
R623	J0113725M	100R RES CARBON FILM 1/2W
R701	J0140933S	RSL-472J7WS(BSR-Z)
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R242571	22K 2W M02S
R726	J0113778M	RD14S2H153JB
R733	R323330	330R 1/4W DRG NO
R735	J0147622	RW99J3Y3R3KM
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147622	RW99J3Y3R3KM
R752	OPTION	NOT FITTED
R759	R437330	4K7 1/4W DRG NO
R764	R457330	470K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R931	OPTION	NOT FITTED
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%

	R950	R648570	68K 1W 5% MO1S F
	R950A	J0700056M	15K 1/16W C/FILM 5%
	R951	R142546	RES 12K 1W FA83 WELWYN
	R952	J0113772M	RD14S2H822JB
	R952A	J0700054M	10K 1/16W C/FILM 5%
	R953	J0700046M	2K7 1/16W C/FILM 5%
	R955	R457725	470K 1/16W MRS16T 1% M/F
	R956	R132330	1K2 1/4W DRG NO
	R957	J0700049M	4K7 1/16W C/FILM 5%
	R958	J0700041M	1K 1/16W C/FILM 5%
	R959	R145725	15K MRS16T 1% M/FILM
	R960	J0700049M	4K7 1/16W C/FILM 5%
	R961	R832725	8K2 MRS16T 1% M/FILM
	R962	J0700067M	100K 1/16W C/FILM 5%
	R963	R252725	220K 1/16W MRS16T 1% M/F
	R964	R437725	4K7 MRS16T 1% M/FILM
	R966	R437725	4K7 MRS16T 1% M/FILM
	R967	R000708	11.5K MRS16T 1% 1/16W
	R968	R140725	10K MRS16T 1% M/FILM
	R969	R140725	10K MRS16T 1% M/FILM
	R970	R141725	11K MRS16T 1% M/FILM
	R971	J0700054M	10K 1/16W C/FILM 5%
	R972	R000709	64.9K MRS16T 1% 1/16W
	R973	R941725	91K MRS16T 1% M/FILM
	R974	J0147516	RES 1R 5W 7APK
	R975	J0147054AF	RW99J3D180KAF
	R977	OPTION	NOT FITTED
	R981	J0700046M	2K7 1/16W C/FILM 5%
	R982	R130330	1K 1/4W DRG NO
	R985	R427571	470R 2W 5% M02S F
	R986	R526571	560R 2W 5% M02S F
	R989	R407542	4R7 1W FF83 WELWYN
	R991	J0700054M	10K 1/16W C/FILM 5%
	R992	R628858	680R 4W VTM KP292 15mmP
	R993	J0700041M	1K 1/16W C/FILM 5%
⚠	R999	R170727	10M 1W VR68 UL BEAB
⚠	RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
	SW001	E139408	4 WAY TACT SWITCH~ALPS~
⚠	SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠	T701	J2436626	FBT HFL1735J - BEABT
	T701A	G201316	M3 X 16 SCREW
	T701B	G201316	M3 X 16 SCREW
	T701C	G201316	M3 X 16 SCREW
	T701D	N332067	SPACER
	T701E	N332067	SPACER
	T701F	N332067	SPACER
	T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠	T900	L380128	A7 32" ETD42 PAN BEAB
	TH900	E441044	PTC TYPE 2322-662-96609
	U201	E710056	UVE25-EW54D HYP MITS EXP
	VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
	VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
	W001	EC530403	7/0.2MM S000029
	W003A	EC551605	7/0.2MM S000029
	W008	EC522002	7/0.2MM S000029
	W012	EC520802	7/0.2MM S000029
	W013	EC520502	7/0.2 S000010
	W014	EC530603	7/0.2MM S000010
	W2700	W024001	0.56ML SFT TIN'D COP WIRE
	W800	EC5A400A	7/0.2MM S000030
	X001	E516030F	12MHz X'TAL NDK 5MM LEG
	X201	E518064	MKT40MA100P MURATA
	X202	E518069	MKT31.9MA110
	X400	E516056F	24.576MHZ CRYSTAL
	X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
	X502	J2791502	X'TAL 3.58MHZ NDK
	Z308/311U	W470200	1MM 1/D SLEEVING BLACK
	Z518C	B912319	WHITE GLASS NO69X19X33
	Z538C	B912319	WHITE GLASS NO69X19X33
	Z901BU	J9451136	UL CSA TUBE N08
	Z904	B912312	WHITE TAPE N069X12X33
	Z905A	W470200	1MM 1/D SLEEVING BLACK
	Z905B	W470200	1MM 1/D SLEEVING BLACK
	ZC706U	B912312	WHITE TAPE N069X12X33
	ZD001	T536179	BZX79C 6V2~PHILIPS~
	ZD003	T536225	BZX79B 6V2 ~PHILIPS~
	ZD200	T536215	BZX 79C 33V~PHILIPS~
	ZD4000	T536177	BZX79C 12V~PHILIPS~
	ZD4001	T536177	BZX79C 12V~PHILIPS~
	ZD4002	T536171	BZX79C36V~PHILIPS~
	ZD4003	T536171	BZX79C36V~PHILIPS~
	ZD4004	T536171	BZX79C36V~PHILIPS~
	ZD4006	T536215	BZX 79C 33V~PHILIPS~
	ZD4500	T536177	BZX79C 12V~PHILIPS~
	ZD4501	T536177	BZX79C 12V~PHILIPS~
	ZD4502	T536177	BZX79C 12V~PHILIPS~
	ZD4503	T536177	BZX79C 12V~PHILIPS~
	ZD501	T536186	BZX79C 8V2~PHILIPS~
	ZD502	T536186	BZX79C 8V2~PHILIPS~
	ZD503	T536186	BZX79C 8V2~PHILIPS~
	ZD504	T536284	BZX284-C9V1
	ZD505	T536184	BZX79C 9V1~PHILIPS~
	ZD506	T536184	BZX79C 9V1~PHILIPS~
	ZD507	T536184	BZX79C 9V1~PHILIPS~
	ZD508	T536280	BZX284-C6V2
	ZD600	T536184	BZX79C 9V1~PHILIPS~
	ZD602	T536174	BZX79C 5V1~PHILIPS~
	ZD603	T536259	BZX79C56V
	ZD610	T536237	BZX79B24V~PHILIPS~
	ZD612	T536184	BZX79C 9V1~PHILIPS~
	ZD700	T536236	BZX79B22V~PHILIPS~
	ZD704	T536246	ZENER 18V 1.3W MULL
	ZD705	T536215	BZX 79C 33V~PHILIPS~
	ZD706	T536185	BZX79C 5V6~PHILIPS~
	ZD717	J2339251M	HZS36-ILT
	ZD902	T536246	ZENER 18V 1.3W MULL
	ZD903	T536266	BZV85-C27V
	ZD904	T536176	BZX 79C10V~PHILIPS~
	ZD950	T536207	DIODE BZV10 REF MULLARD
	ZD957	T536226	BZX79B6V8
	ZD970	J2344122M	PGKE180AG23
	ZR706U	B912312	WHITE TAPE N069X12X33

A528590		**MAIN BOARD**	
	#5000	N936191	A7 CHASSIS FRAME DOLBY
	#5001	JBM00041	FERRITE CORES BP53RB
	#5060	G863063	RIVET
	#701	J3333961	GROUNDING SPRING
⚠	B001	PC50202	A7 MAIN PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299930F	CQ93E2D224KPF
	C2703	J0299931F	POLY CAP 270N 200V
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C430	J0228736R	CC73SSL1H180JR
	C432	C353883	GRM40Y5V334Z16PT
	C450	J0880194R	0.1UF 50V +-5% (100N)
	C4501	J0893048R	CKM-223K500B-CNT2125
	C4502	J0800326R	CEL-101M160WMFT
	C4503	J0893048R	CKM-223K500B-CNT2125
	C4504	J0800326R	CEL-101M160WMFT
	C4505	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4506	J0800326R	CEL-101M160WMFT
	C4507	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4508	J0800326R	CEL-101M160WMFT
	C451	J0800324R	C/ELEC 100UF M SMG 6.3V
	C452	J0880194R	0.1UF 50V +-5% (100N)
	C453	J0800324R	C/ELEC 100UF M SMG 6.3V
	C454	J0880194R	0.1UF 50V +-5% (100N)
	C455	J0800324R	C/ELEC 100UF M SMG 6.3V
	C474	J0800291R	CAP ELEC 10uF 16V SMG
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT
	C518	J0800371F	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT
	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C532	OPTION	NOT FITTED
	C533	C506182	5.6PF 50V 2% DRG NO
	C537	J0893048R	CKM-223K500B-CNT2125
	C538	J0800086	2200u/10V ELEC

	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125
	C546	C150711	CAP 100N 36521104 100V POL
	C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	J0893035R	CKM--222K500B CNT2125
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E
	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C701	J0243507R	CK45B2H331KB
	C702	J0257540F	ELEC CAP 4U7 250V
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	J0244213R	CKL-152K202R-DLT
	C705	J0299624F	15nF 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	JAJ00134	CK45-R3DD 102K-GR
	C708	J0245612F	CK45B3A472K
	C709	J0800021R	CEL - 100M101WMLT-SME
	C710	J0800021R	CEL - 100M101WMLT-SME
	C711	J0299932F	CQ93E2D334KPF
	C712	J0299929F	POLY CAP 180N 200V
	C713	J0299934F	CAP POLYPRO FILM 0.47UF
	C714	J0299934F	CAP POLYPRO FILM 0.47UF
	C715	J0243512R	CK45B2H821KB
	C716U	C140707	CAP 10N 365-51103 MULARD
	C717	J0244211R	CK45B53D102K
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800321R	ELECT CAP 47UF 50V SMG
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C744	J0880039R	CQM472K500HFT
	C749	J0880033R	CQM-152K500HFT
	C801	J0253975F	47UF 250V SME
	C802	J0243512R	CK45B2H821KB
	C813	J0800291R	CAP ELEC 10uF 16V SMG
	C814	J0800291R	CAP ELEC 10uF 16V SMG
	C816	J0890087R	CAP CERAMIC 1000pf-B 50V
	C875	C130877	CER CAP 1N0
	C876	C130877	CER CAP 1N0
	C877	C130877	CER CAP 1N0
	C880	E884110	SPARK GAP 10N 2KV SDUK 16
	C881	J0890077R	CKL-181K500BDFT-D3
	C882	J0890077R	CKL-181K500BDFT-D3
	C883	J0890077R	CKL-181K500BDFT-D3
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C965	J0800294R	ELECT CAP 10UF 50V SMG
	C966	J0800329R	ELECT CAP 100UF 50V SMG
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333753	3N3 "Y"CLASS PME294 BEABT
⚠	C999	C130753	1N0 "Y" PME294 UL BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518058	K9260M SAW DK/BG SOUND
	CP501	E518053	K3953M
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D506	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D604	J2343962M	MPG06G
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
⚠	D705	T431113	DIODE BYD33J MULL BEAB
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB

	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G
	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D962	J2348921M	DIODE 1N4531
	D963	J2348921M	DIODE 1N4531
	D964	J2343962M	MPG06G
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	E006	E846903	2 WAY LEAD
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E4500	E826157	QUAD PHONO SKT 86 SER
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
⚠	E801	E822924	CPT SKT 4545/S7 ~BEAB~
	E804	E843241	CPT EARTH LEAD~GREENLIGHT
	E805	E846894	6 WAY IDC LEAD (FEMALE)
	E806	E846905	4WAY IDC LEAD FEMALE
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
	E903	E826148	PHONO SKT BLACK S000043
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB451	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB452	E770091	EMI FILTER MURATA
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123461M	FERRITE BEAD 0.8uH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235409	HEATSINK
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC450	T900724	YSS241-F/YSS241B-F
	IC453	T900765	DOLBY IC YSS909-M
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC953	T900695	L78M18CV (500mA)
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L4500	J2122943M	AXIAL COIL 10UH-J
	L4501	J2122943M	AXIAL COIL 10UH-J
	L4502	J2122943M	AXIAL COIL 10UH-J
	L4503	J2122943M	AXIAL COIL 10UH-J
	L502	J2122253M	AXIAL COIL 100uH K TAPE

	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L702	L380115	LIN COIL LSLH13JW05SH
	L706	JBH00039R	HC-820 KS1 (LHL10)
	L751	L380117	BRIDGE COIL 5MH
	L752	L380147	&BRIDGE COIL
	L800	JBH00039	HC-820KS1 (LHL10)
⚠	L901	L210063	M-FIL B82724-J2142-N1 BEAB
⚠	L902	L210063	M-FIL B82724-J2142-N1 BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED002	T547050	&SLR37VC3F LED ROHM
	PL006	J2902261	PLG-02P2R5VPWB
	PL007	J2902261	PLG-02P2R5VPWB
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
	PL804	J2902264	PLG-05P 2R5V PWB
	PL805	J2902265	PLG-06P2RVPWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q4503	W024001	0.56ML SFT TIN'D COP WIRE
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B
	Q508	J2315891R	TRS JC548B
	Q601	T636077	&IRFS530A ISOL SAMSUNG
	Q601B	J4520889	SCREW
	Q601D	J8821114	NUT 3
	Q701	T633137	TRANS BF459 MULLARD/SES
	Q703	J2315891R	TRS JC548B
	Q751	J2315451	TRS-BU2508AF
	Q751A	H235305	HEATSINK G7PS 3
	Q751B	G884027	SPRING CLIP
	Q801	T633137	TRANS BF459 MULLARD/SES
	Q802	T633137	TRANS BF459 MULLARD/SES
	Q803	T633137	TRANS BF459 MULLARD/SES
	Q804	T633143	BF423L PHILIPS
	Q805	T633143	BF423L PHILIPS
	Q806	T633143	BF423L PHILIPS
	Q811	J2327773R	2SC3413 TRANSISTOR
	Q812	J2327773R	2SC3413 TRANSISTOR
	Q813	J2327773R	2SC3413 TRANSISTOR
	Q814	T633133	TRANS BF422 BAND MULL/AEG
	Q815	T633133	TRANS BF422 BAND MULL/AEG
	Q816	T633133	TRANS BF422 BAND MULL/AEG
	Q901	T636077	&IRFS530A ISOL SAMSUNG
	Q902	J2315921R	TRS JC558B
	Q903	T636072	BUT12AF NON SELECTED
	Q903A	H235418	POWER HEATSINK(TERNEX)
	Q903B	G884027	SPRING CLIP
	Q903C	B976404	HEAT SINK COMPOUND 340
	Q905	T633133	TRANS BF422 BAND MULL/AEG
	Q906	J2315891R	TRS JC548B
	Q907	J2315891R	TRS JC548B
	Q908	J2315891R	TRS JC548B
	Q950	J2315891R	TRS JC548B
	Q951	T632084	BD438 TRANS'R MOTOROLA
	Q952	T631265	BC546B
	Q954	T633133	TRANS BF422 BAND MULL/AEG
	Q957	T636069	BD909 SGS NON-IS0
	Q957A	H234344	POWER HEATSINK G7PS3
	Q957B	G311331	M3 FULLNUT
	Q957C	B976404	HEAT SINK COMPOUND 340
	Q957D	F133310	M3X10MM POZI PAN M/C SCRW
	Q957E	G560331	M3 SPRING WASHER~TR FAST~
	Q959	J2315891R	TRS JC548B
	R001	J0700027M	100R 1/16W C/FILM 5%
	R002	J0700027M	100R 1/16W C/FILM 5%
	R003	J0700027M	100R 1/16W C/FILM 5%
	R004	J0700027M	100R 1/16W C/FILM 5%
	R005	J0700027M	100R 1/16W C/FILM 5%
	R006	J0195875R	RMC73S 2A101JR
	R008	J0195912R	RMC73S 2A332JR
	R010	E770091	EMI FILTER MURATA
	R011	E770091	EMI FILTER MURATA
	R012	J0700027M	100R 1/16W C/FILM 5%
	R013	J0700027M	100R 1/16W C/FILM 5%
	R015	J0700059M	27K 1/16W C/FILM 5%
	R016	J0700034M	330R 1/16W C/FILM 5%
	R017	J0187060M	RD14S1J621JB
	R019	J0700054M	10K 1/16W C/FILM 5%
	R020	J0700042M	1K2 1/16W C/FILM 5%
	R021	J0700045M	2K2 1/16W C/FILM 5%
	R023	J0700027M	100R 1/16W C/FILM 5%
	R024	J0700027M	100R 1/16W C/FILM 5%
	R025	J0700027M	100R 1/16W C/FILM 5%
	R026	J0700027M	100R 1/16W C/FILM 5%
	R028	J0195875R	RMC73S 2A101JR
	R029	J0195875R	RMC73S 2A101JR
	R030	J0195875R	RMC73S 2A101JR
	R031	J0700027M	100R 1/16W C/FILM 5%
	R032	J0700027M	100R 1/16W C/FILM 5%
	R033	J0700027M	100R 1/16W C/FILM 5%
	R034	J0700027M	100R 1/16W C/FILM 5%
	R037	J0700027M	100R 1/16W C/FILM 5%
	R038	J0700027M	100R 1/16W C/FILM 5%
	R039	J0700027M	100R 1/16W C/FILM 5%
	R044	E770091	EMI FILTER MURATA
	R045	E770091	EMI FILTER MURATA
	R046	E770091	EMI FILTER MURATA
	R047	E770091	EMI FILTER MURATA
	R048	E770091	EMI FILTER MURATA
	R049	J0195885R	RMC73S 2A271JR
	R050	J0195885R	RMC73S 2A271JR
	R051	J0195885R	RMC73S 2A271JR
	R052	J0195885R	RMC73S 2A271JR
	R053	J0195885R	RMC73S 2A271JR
	R054	J0195885R	RMC73S 2A271JR
	R055	J0195885R	RMC73S 2A271JR
	R056	J0195885R	RMC73S 2A271JR
	R057	J0195885R	RMC73S 2A271JR
	R058	J0195885R	RMC73S 2A271JR
	R059	J0195885R	RMC73S 2A271JR
	R065	R222330	220R 1/4W DRG NO
	R067	J0700054M	10K 1/16W C/FILM 5%
	R068	J0700054M	10K 1/16W C/FILM 5%
	R069	J0700054M	10K 1/16W C/FILM 5%
	R071	J0700054M	10K 1/16W C/FILM 5%
	R072	J0700054M	10K 1/16W C/FILM 5%
	R073	J0700049M	4K7 1/16W C/FILM 5%
	R074	J0700049M	4K7 1/16W C/FILM 5%
	R075	J0700027M	100R 1/16W C/FILM 5%
	R076	J0700027M	100R 1/16W C/FILM 5%

R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R214	J0187086M	RD14S1J752JB
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700044M	1K8 1/16W C/FILM 5%
R2700	R120330	100R 1/4W DRG NO
R3	J0195013R	RMC73 2B102JR
R30	J0195881R	RMC73S 2A181JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO
R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0700057M	18K 1/16W C/FILM 5%
R414	J0700057M	18K 1/16W C/FILM 5%
R415	J0700057M	18K 1/16W C/FILM 5%
R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R430	E770091	EMI FILTER MURATA
R431	J0195881R	RMC73S 2A181JR
R432	J0195881R	RMC73S 2A181JR

R433	J0195881R	RMC73S 2A181JR
R434	J0195881R	RMC73S 2A181JR
R435	J0195881R	RMC73S 2A181JR
R436	J0195881R	RMC73S 2A181JR
R437	J0195881R	RMC73S 2A181JR
R438	J0195881R	RMC73S 2A181JR
R440	E770091	EMI FILTER MURATA
R441	J0195881R	RMC73S 2A181JR
R449	J0700054M	10K 1/16W C/FILM 5%
R450	J0700027M	100R 1/16W C/FILM 5%
R4501	J0700027M	100R 1/16W C/FILM 5%
R4502	J0700027M	100R 1/16W C/FILM 5%
R4503	J0700027M	100R 1/16W C/FILM 5%
R4504	J0700027M	100R 1/16W C/FILM 5%
R4509	J0700067M	100K 1/16W C/FILM 5%
R451	J0700027M	100R 1/16W C/FILM 5%
R4510	J0195950R	RMC73S 2A104JR
R4511	J0195950R	RMC73S 2A104JR
R4512	J0195950R	RMC73S 2A104JR
R4540	J0195250R	RMC73S 000R
R4541	J0195250R	RMC73S 000R
R459	J0700054M	10K 1/16W C/FILM 5%
R464	J0700027M	100R 1/16W C/FILM 5%
R465	J0700027M	100R 1/16W C/FILM 5%
R466	J0700054M	10K 1/16W C/FILM 5%
R469	J0700027M	100R 1/16W C/FILM 5%
R470	J0700054M	10K 1/16W C/FILM 5%
R471	J0700054M	10K 1/16W C/FILM 5%
R472	J0700054M	10K 1/16W C/FILM 5%
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700032M	220R 1/16W C/FILM 5%
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%
R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R532	R128330	180R 1/4W DRG NO
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	R457725	470K 1/16W MRS16T 1% M/F
R544	J0700069M	150K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700029M	150R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R
R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R105330	1.5R 1/4W DRG NO
R603	R202330	2R2 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R621	R842570	82K 1W 5% MO1S
R701	J0140933S	RSL-472J7WS(BSR-Z)
R702	R120330	100R 1/4W DRG NO
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R145549	15K FF84~WELWYN~
R726	J0113778M	RD14S2H153JB
R733	R323330	330R 1/4W DRG NO
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R832330	8K2 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147630	7W 6.8R WIRE WOUND ~PAN~
R759	R437330	4K7 1/4W DRG NO
R764	R658330	680K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R803	R110330	10R 1/4W DRG NO
R804	R145571	15K 2W 5% MO2S F
R805	R145571	15K 2W 5% MO2S F
R806	R145571	15K 2W 5% MO2S F
R807	J0113744M	RD14S2H561JB
R808	J0113744M	RD14S2H561JB
R809	J0113744M	RD14S2H561JB
R811	J0700041M	1K 1/16W C/FILM 5%
R812	J0700041M	1K 1/16W C/FILM 5%
R813	J0700041M	1K 1/16W C/FILM 5%
R820	R130330	1K 1/4W DRG NO
R821	R427330	470R 1/4W DRG NO
R822	R427330	470R 1/4W DRG NO
R823	R427330	470R 1/4W DRG NO
R896	R132330	1K2 1/4W DRG NO
R897	R132330	1K2 1/4W DRG NO
R898	R132330	1K2 1/4W DRG NO
R8A1	R822330	820R 1/4W DRG NO
R8A2	R822330	820R 1/4W DRG NO
R8A3	R822330	820R 1/4W DRG NO
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R948	J0700041M	1K 1/16W C/FILM 5%

	R949	J0700046M	2K7 1/16W C/FILM 5%
	R950	R648570	68K 1W 5% MO1S F
	R950A	J0100101M	RD14S2B333JB
	R951	R142546	RES 12K 1W FA83 WELWYN
	R952	J0113772M	RD14S2H822JB
	R952A	J0700054M	10K 1/16W C/FILM 5%
	R953	J0700046M	2K7 1/16W C/FILM 5%
	R955	R457725	470K 1/16W MRS16T 1% M/F
	R956	R132330	1K2 1/4W DRG NO
	R957	J0700049M	4K7 1/16W C/FILM 5%
	R958	J0700041M	1K 1/16W C/FILM 5%
	R959	R145725	15K MRS16T 1% M/FILM
	R960	J0700049M	4K7 1/16W C/FILM 5%
	R961	R832725	8K2 MRS16T 1% M/FILM
	R962	J0700067M	100K 1/16W C/FILM 5%
	R963	R252725	220K 1/16W MRS16T 1% M/F
	R964	R437725	4K7 MRS16T 1% M/FILM
	R966	R437725	4K7 MRS16T 1% M/FILM
	R967	R000708	11.5K MRS16T 1% 1/16W
	R968	R140725	10K MRS16T 1% M/FILM
	R969	R140725	10K MRS16T 1% M/FILM
	R970	R141725	11K MRS16T 1% M/FILM
	R971	J0700054M	10K 1/16W C/FILM 5%
	R972	R000709	64.9K MRS16T 1% 1/16W
	R973	R941725	91K MRS16T 1% M/FILM
	R974	J0147516	RES 1R 5W 7APK
	R975	J0147054AF	RW99J3D180KAF
	R980	R648570	68K 1W 5% MO1S F
	R981	J0700046M	2K7 1/16W C/FILM 5%
	R982	R130330	1K 1/4W DRG NO
	R985	R427571	470R 2W 5% M02S F
	R986	R526571	560R 2W 5% M02S F
	R989	R407542	4R7 1W FF83 WELWYN
	R991	J0700054M	10K 1/16W C/FILM 5%
	R992	R628858	680R 4W VTM KP292 15mmP
	R993	J0700041M	1K 1/16W C/FILM 5%
⚠	R999	R170727	10M 1W VR68 UL BEAB
⚠	RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
	SG800	J2340039	SPARK GAP - FORMED
	SW001	E139408	4 WAY TACT SWITCH~ALPS~
⚠	SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠	T701	JBW01051	FBT HFL1530G BEABT
	T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠	T900	L380122	SMT-SLOT FAE42/15 BEABT
	TH900	E441044	PTC TYPE 2322-662-96609
	U201	E710060	& UE25-B57D UK (VA)
	VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
	VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
	W2700	W024001	0.56ML SFT TIN'D COP WIRE
	W800	EC5A400A	7/0.2MM S000030
	X001	E516030F	12MHz X'TAL NDK 5MM LEG
	X400	E516056F	24.576MHZ CRYSTAL
	X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
	X502	J2791502	X'TAL 3.58MHZ NDK
	Z901BU	J9451136	UL CSA TUBE N08
	Z904	B912312	WHITE TAPE N069X12X33
	Z905A	W470200	1MM 1/D SLEEVING BLACK
	Z905B	W470200	1MM 1/D SLEEVING BLACK
	ZC706U	B912312	WHITE TAPE N069X12X33
	ZD001	T536179	BZX79C 6V2~PHILIPS~
	ZD003	T536225	BZX79B 6V2 ~PHILIPS~
	ZD200	T536215	BZX 79C 33V~PHILIPS~
	ZD4000	T536177	BZX79C 12V~PHILIPS~
	ZD4001	T536177	BZX79C 12V~PHILIPS~
	ZD4002	T536171	BZX79C36V~PHILIPS~
	ZD4003	T536171	BZX79C36V~PHILIPS~
	ZD4004	T536171	BZX79C36V~PHILIPS~
	ZD4006	T536215	BZX 79C 33V~PHILIPS~
	ZD4500	T536177	BZX79C 12V~PHILIPS~
	ZD4501	T536177	BZX79C 12V~PHILIPS~
	ZD4502	T536177	BZX79C 12V~PHILIPS~
	ZD4503	T536177	BZX79C 12V~PHILIPS~
	ZD501	T536186	BZX79C 8V2~PHILIPS~
	ZD502	T536186	BZX79C 8V2~PHILIPS~
	ZD503	T536186	BZX79C 8V2~PHILIPS~
	ZD504	T536284	BZX284-C9V1
	ZD505	T536184	BZX79C 9V1~PHILIPS~
	ZD506	T536184	BZX79C 9V1~PHILIPS~
	ZD507	T536184	BZX79C 9V1~PHILIPS~
	ZD508	T536280	BZX284-C6V2
	ZD600	T536184	BZX79C 9V1~PHILIPS~
	ZD602	T536174	BZX79C 5V1~PHILIPS~
	ZD603	T536259	BZX79C56V
	ZD610	T536237	BZX79B24V~PHILIPS~
	ZD612	T536184	BZX79C 9V1~PHILIPS~
	ZD700	T536236	BZX79B22V~PHILIPS~
	ZD704	T536246	ZENER 18V 1.3W MULL
	ZD705	T536215	BZX 79C 33V~PHILIPS~
	ZD706	T536185	BZX79C 5V6~PHILIPS~
	ZD717	J2339251M	HZS36-ILT
	ZD902	T536246	ZENER 18V 1.3W MULL
	ZD903	T536266	BZV85-C27V
	ZD904	T536176	BZX 79C10V~PHILIPS~
	ZD950	T536207	DIODE BZV10 REF MULLARD
	ZD957	T536226	BZX79B6V8
	ZD970	J2344122M	PGKE180AG23
	ZR706U	B912312	WHITE TAPE N069X12X33

A528680		MAIN BOARD
#5000	N936193F	CHASSIS FRAME
#5001	JBM00041	FERRITE CORES BP53RB
#5060	G863063	RIVET
#701	J3333961	GROUNDING SPRING
#702	B912319	WHITE GLASS NO69X19X33
#7100	B912319	WHITE GLASS NO69X19X33
#E1	G864006	CABLE TIE T18R
C001	J0880194R	0.1UF 50V +-5% (100N)
C002	J0890083R	CK45 B1H471KB
C003	J0893027R	CKM-104K250B-CNT2125
C004	J0800326R	CEL-101M160WMFT
C009	J0880194R	0.1UF 50V +-5% (100N)
C010	J0880194R	0.1UF 50V +-5% (100N)
C011	J0893027R	CKM-104K250B-CNT2125
C012	J0228042R	CC73SCH1H330JR
C013	J0228042R	CC73SCH1H330JR
C014	J0800333R	CEL 221M6R3WMFT SMG
C016	J0880194R	0.1UF 50V +-5% (100N)
C017	J0880194R	0.1UF 50V +-5% (100N)
C018	J0880194R	0.1UF 50V +-5% (100N)
C020	J0890064R	CER CAP 18PF 50V
C021	J0800326R	CEL-101M160WMFT
C022	J0800326R	CEL-101M160WMFT
C023	J0800326R	CEL-101M160WMFT
C025	J0800282R	ELECT CAP 2.2UF-M 50V SMG
C2	J0880194R	0.1UF 50V +-5% (100N)
C200	J0800317R	CP ELECTRO 47UF SMG 16
C201	C140759	10N 63V POLY MMK5 R/EVOX
C202	J0880044R	CAP POLYESTER 0.01UF K50V
C203	J0800324R	C/ELEC 100UF M SMG 6.3V
C204	J0880194R	0.1UF 50V +-5% (100N)
C208	OPTION	NOT FITTED
C217	J0880194R	0.1UF 50V +-5% (100N)
C218	J0880194R	0.1UF 50V +-5% (100N)
C220	C802182	8.2PF 50V 2% DRG NO
C221	J0800282R	ELECT CAP 2.2UF-M 50V SMG
C222	J0800294R	ELECT CAP 10UF 50V SMG
C223	J0880044R	CAP POLYESTER 0.01UF K50V
C224	J0880048R	CQT223K50MB (PANASONIC)
C226	OPTION	NOT FITTED
C227U	J0890123R	CC45CH1H470JB ~MURATA~
C228	J0890123R	CC45CH1H470JB ~MURATA~
C2702	J0299930F	CQ93E2D224KPF
C2703	J0299931F	POLY CAP 270N 200V
C300	J0800352R	ELEC CAP 470UF 10V SMG
C301	J0890087R	CAP CERAMIC 1000pf-B 50V
C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
C303	J0800294R	ELECT CAP 10UF 50V SMG
C304	J0890087R	CAP CERAMIC 1000pf-B 50V
C305	J0800294R	ELECT CAP 10UF 50V SMG
C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
C308	J0890087R	CAP CERAMIC 1000pf-B 50V
C308U	J0890087R	CAP CERAMIC 1000pf-B 50V
C309	J0800294R	ELECT CAP 10UF 50V SMG
C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
C311	J0890087R	CAP CERAMIC 1000pf-B 50V
C311U	J0890087R	CAP CERAMIC 1000pf-B 50V
C312	J0800294R	ELECT CAP 10UF 50V SMG
C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
C315	J0800294R	ELECT CAP 10UF 50V SMG
C316	J0800294R	ELECT CAP 10UF 50V SMG
C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
C319	J0800352R	ELEC CAP 470UF 10V SMG
C320	J0800291R	CAP ELEC 10uF 16V SMG
C322	J0800291R	CAP ELEC 10uF 16V SMG
C400	J0880194R	0.1UF 50V +-5% (100N)
C4000	J0880062R	CQ93M1H224KEB
C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
C4003	J0880062R	CQ93M1H224KEB
C4004	J0800363F	CEO4W1F102M (SMG)
C4005	J0800321R	ELECT CAP 47UF 50V SMG
C4006	J0800321R	ELECT CAP 47UF 50V SMG
C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
C4008	J0880194R	0.1UF 50V +-5% (100N)
C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
C401	J0800324R	C/ELEC 100UF M SMG 6.3V
C4010	J0880194R	0.1UF 50V +-5% (100N)
C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
C4015	J0800321R	ELECT CAP 47UF 50V SMG
C402	C353883	GRM40Y5V334Z16PT
C403	J0880194R	0.1UF 50V +-5% (100N)
C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
C405	J0800321R	ELECT CAP 47UF 50V SMG
C406	J0800279R	ELECT CAP 1.0UF 50V SMG
C407	J0195250R	RMC73S 000R
C408	C506881	GRM40COG5R6D50-500
C409	C506881	GRM40COG5R6D50-500
C411	C457759	470N 63V POLY MMK5 RIFA/E
C412	C457759	470N 63V POLY MMK5 RIFA/E
C413	C457759	470N 63V POLY MMK5 RIFA/E
C414	C353883	GRM40Y5V334Z16PT
C415	C353883	GRM40Y5V334Z16PT
C416	C353883	GRM40Y5V334Z16PT
C417	C353883	GRM40Y5V334Z16PT
C418	J0800317R	CP ELECTRO 47UF SMG 16
C419	J0800317R	CP ELECTRO 47UF SMG 16
C422	J0800317R	CP ELECTRO 47UF SMG 16
C423	J0800317R	CP ELECTRO 47UF SMG 16
C424	C140882	GRM40X7R103K50-550
C425	C140882	GRM40X7R103K50-550
C426	J0800317R	CP ELECTRO 47UF SMG 16
C427	J0800317R	CP ELECTRO 47UF SMG 16
C430	J0228736R	CC73SSL1H180JR
C432	C353883	GRM40Y5V334Z16PT
C473	OPTION	NOT FITTED
C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
C511	J0880194R	0.1UF 50V +-5% (100N)
C513	C457883	GRM40Y5V474Z16PT
C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
C515	J0880194R	0.1UF 50V +-5% (100N)
C517	C353883	GRM40Y5V334Z16PT
C518	J0800371F	ELECT CAP 3300UF 10V SMG
C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
C520	J0893013R	CKM224K160B-2125
C521	J0880194R	0.1UF 50V +-5% (100N)
C522	J0228066R	GRM40CDG331J50PT
C523	J0880064R	CQM - 334J500HFT
C524	J0880064R	CQM - 334J500HFT
C525	J0880064R	CQM - 334J500HFT
C526	H163007	BTC LINK 50MM(A/INSERTED)
C527	H163007	BTC LINK 50MM(A/INSERTED)
C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
C530	J0880039R	CQM472K500HFT
C531	J0880194R	0.1UF 50V +-5% (100N)
C532	OPTION	NOT FITTED
C533	C506182	5.6PF 50V 2% DRG NO
C539	J0880194R	0.1UF 50V +-5% (100N)
C540	J0893035R	CKM--222K500B CNT2125
C541	J0880039R	CQM472K500HFT
C542	J0800279R	ELECT CAP 1.0UF 50V SMG
C543	J0893031R	CKM 102K500B CNT2125
C544	J0893031R	CKM 102K500B CNT2125
C545	J0893027R	CKM-104K250B-CNT2125
C546	C150711	CAP 100N 36521104 100V POL

	C547	J0800282R	ELECT CAP 2.2UF-M 50V SMG
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	C457883	GRM40Y5V474Z16PT
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E
	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C701	J0243507R	CK45B2H331KB
	C702	J0257540F	ELEC CAP 4U7 250V
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	JAJ00138	CC-222K202R-DF 2N2 2KV
	C705	J0299993F	CAP 18NF 5% 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	JAJ00134	CK45-R3DD 102K-GR
	C708	J0245612F	CK45B3A472K
	C709	J0253952R	CEO4W2C1ROMP
	C710	J0253952R	CEO4W2C1ROMP
	C711	J0299932F	CQ93E2D334KPF
	C712	J0299929F	POLY CAP 180N 200V
	C713	J0299934F	CAP POLYPRO FILM 0.47UF
	C714	J0299934F	CAP POLYPRO FILM 0.47UF
	C715	J0243512R	CK45B2H821KB
	C716	C140707	CAP 10N 365-51103 MULARD
	C717	J0244213R	CKL-152K202R-DLT
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800303R	ELECT CAP 22UF 50V SMG
	C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C726	H163007	BTC LINK 50MM(A/INSERTED)
	C732	H163007	BTC LINK 50MM(A/INSERTED)
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C737	C160708	1UF +-10% 250V 368-45105
	C739	OPTION	NOT FITTED
	C744	J0880048R	CQT223K50MB (PANASONIC)
	C749	J0880033R	CQM-152K500HFT
	C760U	JAJ00138	CC-222K202R-DF 2N2 2KV
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C905A	OPTION	NOT FITTED
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C909A	OPTION	NOT FITTED
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C920	OPTION	NOT FITTED
	C921	OPTION	NOT FITTED
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C927	OPTION	NOT FITTED
	C949	OPTION	NOT FITTED
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.0UF 50V SMG
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C964	J0800288R	CAP ELECTRO 4.7UF-M 50VSMG
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C969	J0800335R	CAP ELECT 220UF 16V SMG
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333753	3N3 "Y"CLASS PME294 BEABT
⚠	C999	C130753	1N0 "Y" PME294 UL BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518050	G9251M SAW B/G SOUND
	CP501	E518068	SAW G3967M
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D202	J2348921M	DIODE 1N4531
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D604	H163007	BTC LINK 50MM(A/INSERTED)
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
	D704	H163007	BTC LINK 50MM(A/INSERTED)
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
	D711	OPTION	NOT FITTED
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D729	OPTION	NOT FITTED
	D732	T531055	DIODE BAT85 SCHOTTKY MULL
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G

	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D912	OPTION	NOT FITTED
	D913	OPTION	NOT FITTED
	D914	OPTION	NOT FITTED
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D963	J2348921M	DIODE 1N4531
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D973	H163007	BTC LINK 50MM(A/INSERTED)
	D974	J2343962M	MPG06G
	D976	J2348921M	DIODE 1N4531
	D986	J2348921M	DIODE 1N4531
	D987	J2348921M	DIODE 1N4531
	E1	E843243	CPT EARTH LEAD
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826945	SINGLE SCART METALLO
	E302	E826945	SINGLE SCART METALLO
	E303	J2673821	JAK-TCX0191-01A
	E304	OPTION	NOT FITTED
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E843379	CRT BASE LEAD
	F001	OPTION	NOT FITTED
	F002	OPTION	NOT FITTED
	F003	OPTION	NOT FITTED
	F004	OPTION	NOT FITTED
	F901	H163007	BTC LINK 50MM(A/INSERTED)
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB3	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FIL MURATA BLM21A102S
	FB400	E770091	EMI FIL MURATA BLM21A102S
	FB401	E770091	EMI FIL MURATA BLM21A102S
	FB402	E770091	EMI FIL MURATA BLM21A102S
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FIL MURATA BLM21A102S
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB905	H163007	BTC LINK 50MM(A/INSERTED)
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB909	H163007	BTC LINK 50MM(A/INSERTED)
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296GP/044 PHILIPS
	IC002	E730278	M27C512 M10_3.D CHK=8682
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC501	T900766	TDA8844/N2C
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC954	T900796	&TL431CZ-AP SGS
	IDL	X870402	BAR CODED SERIAL LABEL
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	L010	H163007	BTC LINK 50MM(A/INSERTED)
	L011	H163007	BTC LINK 50MM(A/INSERTED)
	L012	H163007	BTC LINK 50MM(A/INSERTED)
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380178	LIN COIL ISKRA
	L703	J2123781R	FILTER COIL EL101K
	L751	J2220641	E/W INJECTION COIL
	L752	L380147	&BRIDGE COIL
	L801	H163007	BTC LINK 50MM(A/INSERTED)
⚠	L901	L210063	M-FIL B82724-J2142-N1 BEAB
	L902A	H163007	BTC LINK 50MM(A/INSERTED)
	L902B	H163007	BTC LINK 50MM(A/INSERTED)
	L904	J2125579	CHOKE COIL 47UH

	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LABEL 1	X870402	BAR CODED SERIAL LABEL
	LABEL2	X870291	LABEL
	LED002	T547050	&SLR37VC3F LED ROHM
	MD1	A783827	CHASSIS LABEL PRINT SPEC
	MD701	DRG0266	MODIFICATION DRAWING
	MOD1	DRG0444	MODIFICATION DRAWING
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B
	Q508	J2315891R	TRS JC548B
	Q601	T636077	&IRFS530A ISOL SAMSUNG
	Q601B	J4520889	SCREW
	Q601D	J8821114	NUT 3
	Q701	T633137	TRANS BF459 MULLARD/SES
	Q703	J2315891R	TRS JC548B
	Q751	J2315451	TRS-BU2508AF
	Q751A	H235305	HEATSINK G7PS 3
	Q751B	G884027	SPRING CLIP
	Q901	T636077	&IRFS530A ISOL SAMSUNG
	Q902	J2315921R	TRS JC558B
	Q903	T636072	BUT12AF NON SELECTED
	Q903A	H235417	POWER HEATSINK(COPPER)
	Q903B	G884027	SPRING CLIP
	Q903C	B976404	HEAT SINK COMPOUND 340
	Q905	T633133	TRANS BF422 BAND MULL/AEG
	Q906	J2315891R	TRS JC548B
	Q907	J2315891R	TRS JC548B
	Q908	J2315891R	TRS JC548B
	Q950	J2315891R	TRS JC548B
	Q951	T632084	BD438 TRANS'R MOTOROLA
	Q952	T631265	BC546B
	Q954	T633133	TRANS BF422 BAND MULL/AEG
	Q957	T636069	BD909 SGS NON-IS0
	Q957A	H234344	POWER HEATSINK G7PS3
	Q957B	G311331	M3 FULLNUT
	Q957C	B976404	HEAT SINK COMPOUND 340
	Q957D	F133310	M3X10MM POZI PAN M/C SCRW
	Q957E	G560331	M3 SPRING WASHER~TR FAST~
	Q959	J2315891R	TRS JC548B
	Q961	J2315891R	TRS JC548B
	Q962	J2315891R	TRS JC548B
	R001	J0700027M	100R 1/16W C/FILM 5%
	R002	J0700027M	100R 1/16W C/FILM 5%
	R003	J0700027M	100R 1/16W C/FILM 5%
	R004	J0700027M	100R 1/16W C/FILM 5%
	R005	J0700027M	100R 1/16W C/FILM 5%
	R006	J0195875R	RMC73S 2A101JR
	R008	J0195912R	RMC73S 2A332JR
	R010	E770091	EMI FIL MURATA BLM21A102S
	R011	E770091	EMI FIL MURATA BLM21A102S
	R012	J0700027M	100R 1/16W C/FILM 5%
	R013	J0700027M	100R 1/16W C/FILM 5%
	R015	J0700059M	27K 1/16W C/FILM 5%
	R016	J0700034M	330R 1/16W C/FILM 5%
	R017	J0187060M	RD14S1J621JB
	R019	J0700054M	10K 1/16W C/FILM 5%
	R020	J0700042M	1K2 1/16W C/FILM 5%
	R021	J0700045M	2K2 1/16W C/FILM 5%
	R023	J0700027M	100R 1/16W C/FILM 5%
	R024	J0700027M	100R 1/16W C/FILM 5%
	R025	J0700027M	100R 1/16W C/FILM 5%
	R026	J0700027M	100R 1/16W C/FILM 5%
	R028	J0195875R	RMC73S 2A101JR
	R029	J0195875R	RMC73S 2A101JR
	R030	J0195875R	RMC73S 2A101JR
	R031	J0700027M	100R 1/16W C/FILM 5%
	R032	J0700027M	100R 1/16W C/FILM 5%
	R033	J0700027M	100R 1/16W C/FILM 5%
	R034	J0700027M	100R 1/16W C/FILM 5%
	R037	J0700027M	100R 1/16W C/FILM 5%
	R038	J0700027M	100R 1/16W C/FILM 5%
	R039	J0700027M	100R 1/16W C/FILM 5%
	R044	E770091	EMI FIL MURATA BLM21A102S
	R045	E770091	EMI FIL MURATA BLM21A102S
	R046	E770091	EMI FIL MURATA BLM21A102S
	R047	E770091	EMI FIL MURATA BLM21A102S
	R048	E770091	EMI FIL MURATA BLM21A102S
	R049	J0195885R	RMC73S 2A271JR
	R050	J0195885R	RMC73S 2A271JR
	R051	J0195885R	RMC73S 2A271JR
	R052	J0195885R	RMC73S 2A271JR
	R053	J0195885R	RMC73S 2A271JR
	R054	J0195885R	RMC73S 2A271JR
	R055	J0195885R	RMC73S 2A271JR
	R056	J0195885R	RMC73S 2A271JR
	R057	J0195885R	RMC73S 2A271JR
	R058	J0195885R	RMC73S 2A271JR
	R059	J0195885R	RMC73S 2A271JR
	R065	R222330	220R 1/4W DRG NO
	R067	J0700054M	10K 1/16W C/FILM 5%
	R068	J0700054M	10K 1/16W C/FILM 5%
	R069	J0700054M	10K 1/16W C/FILM 5%
	R071	J0700054M	10K 1/16W C/FILM 5%
	R072	J0700054M	10K 1/16W C/FILM 5%
	R073	J0700049M	4K7 1/16W C/FILM 5%
	R074	J0700049M	4K7 1/16W C/FILM 5%
	R075	J0700027M	100R 1/16W C/FILM 5%
	R076	J0700027M	100R 1/16W C/FILM 5%
	R077	J0700027M	100R 1/16W C/FILM 5%
	R078	J0700027M	100R 1/16W C/FILM 5%
	R079	J0195875R	RMC73S 2A101JR
	R080	J0700027M	100R 1/16W C/FILM 5%
	R081	J0700027M	100R 1/16W C/FILM 5%
	R082	J0700054M	10K 1/16W C/FILM 5%
	R083	J0700027M	100R 1/16W C/FILM 5%
	R084	J0700027M	100R 1/16W C/FILM 5%
	R085	J0700027M	100R 1/16W C/FILM 5%
	R086	J0700027M	100R 1/16W C/FILM 5%
	R087	J0700054M	10K 1/16W C/FILM 5%
	R088	J0700054M	10K 1/16W C/FILM 5%
	R089	J0700049M	4K7 1/16W C/FILM 5%
	R090	J0700059M	27K 1/16W C/FILM 5%
	R091	J0700046M	2K7 1/16W C/FILM 5%
	R093	J0700054M	10K 1/16W C/FILM 5%
	R098	J0195925R	RMC73S 2A103JR
	R1	E770091	EMI FIL MURATA BLM21A102S
	R100	R247330	27K 1/4W DRG NO
	R102	R323330	330R 1/4W DRG NO

R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FIL MURATA BLM21A102S
R156	J0700049M	4K7 1/16W C/FILM 5%
R157	J0700049M	4K7 1/16W C/FILM 5%
R2	E770091	EMI FIL MURATA BLM21A102S
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R210	J0700027M	100R 1/16W C/FILM 5%
R212A	J0700041M	1K 1/16W C/FILM 5%
R217	J0700046M	2K7 1/16W C/FILM 5%
R218	J0700046M	2K7 1/16W C/FILM 5%
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700047M	3K3 1/16W C/FILM 5%
R26	J0195250R	RMC73S 000R
R27	J0195250R	RMC73S 000R
R3	J0195013R	RMC73 2B102JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO
R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R405	H163007	BTC LINK 50MM(A/INSERTED)
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0700057M	18K 1/16W C/FILM 5%
R414	J0700057M	18K 1/16W C/FILM 5%
R415	J0700057M	18K 1/16W C/FILM 5%
R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R449	J0700054M	10K 1/16W C/FILM 5%
R478	OPTION	NOT FITTED
R489	OPTION	NOT FITTED
R5	H163007	BTC LINK 50MM(A/INSERTED)
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700031M	180R 1/16W C/FILM 5%
R506	H163007	BTC LINK 50MM(A/INSERTED)
R507	H163007	BTC LINK 50MM(A/INSERTED)
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R512	OPTION	NOT FITTED
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%

R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R527	H163007	BTC LINK 50MM(A/INSERTED)
R531	H163007	BTC LINK 50MM(A/INSERTED)
R532	R128330	180R 1/4W DRG NO
R533	H163007	BTC LINK 50MM(A/INSERTED)
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	J0700067M	100K 1/16W C/FILM 5%
R544	J0700069M	150K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700031M	180R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R
R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R100736	1R 1/4W 1% MFR4
R603	R202330	2R2 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R618	H163007	BTC LINK 50MM(A/INSERTED)
R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
R620	H163007	BTC LINK 50MM(A/INSERTED)
R623	J0113725M	100R RES CARBON FILM 1/2W
R701	J0140933S	RSL-472J7WS(BSR-Z)
R702	R120330	100R 1/4W DRG NO
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R145549	15K FF84~WELWYN~
R726	J0113778M	RD14S2H153JB
R732	R155330	150K 1/4W DRG NO
R733	R323330	330R 1/4W DRG NO
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147630	7W 6.8R WIRE WOUND ~PAN~
R752	R447330	47K 1/4W DRG NO
R757	H163007	BTC LINK 50MM(A/INSERTED)
R759	R437330	4K7 1/4W DRG NO
R764	R658330	680K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R814	OPTION	NOT FITTED
R815	OPTION	NOT FITTED
R816	OPTION	NOT FITTED
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R913	H163007	BTC LINK 50MM(A/INSERTED)
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R931	OPTION	NOT FITTED
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0100101M	RD14S2B333JB
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%
R954	H163007	BTC LINK 50MM(A/INSERTED)
R955	R457725	470K 1/16W MRS16T 1% M/F
R956	R132330	1K2 1/4W DRG NO
R957	J0700049M	4K7 1/16W C/FILM 5%
R958	J0700041M	1K 1/16W C/FILM 5%
R959	R145725	15K MRS16T 1% M/FILM
R960	J0700049M	4K7 1/16W C/FILM 5%
R961	R931725	9K1 MRS16T 1% M/FILM
R962	J0700067M	100K 1/16W C/FILM 5%
R963	R252725	220K 1/16W MRS16T 1% M/F
R964	R437725	4K7 MRS16T 1% M/FILM
R965	J0700041M	1K 1/16W C/FILM 5%
R966	R437725	4K7 MRS16T 1% M/FILM
R967	R000708	11.5K MRS16T 1% 1/16W
R968	R140725	10K MRS16T 1% M/FILM
R969	R140725	10K MRS16T 1% M/FILM
R970	R141725	11K MRS16T 1% M/FILM
R971	J0700054M	10K 1/16W C/FILM 5%
R972	R000709	64.9K MRS16T 1% 1/16W
R973	R941725	91K MRS16T 1% M/FILM
R974	J0147516	RES 1R 5W 7APK
R976	J0700058M	22K 1/16W C/FILM 5%
R977	OPTION	NOT FITTED
R978	J0700067M	100K 1/16W C/FILM 5%
R981	J0700046M	2K7 1/16W C/FILM 5%
R982	R130330	1K 1/4W DRG NO
R985	R427571	470R 2W 5% M02S F
R986	R526571	560R 2W 5% M02S F
R987	J0700036M	470R 1/16W C/FILM 5%
R989	R407542	4R7 1W FF83 WELWYN
R991	J0700054M	10K 1/16W C/FILM 5%
R992	R628858	680R 4W VTM KP292 15mmP
R993	J0700041M	1K 1/16W C/FILM 5%
R996	H163007	BTC LINK 50MM(A/INSERTED)
R997	OPTION	NOT FITTED
R998	OPTION	NOT FITTED
⚠ R999	R170727	10M 1W VR68 UL BEAB

	RL2700A	H163007	BTC LINK 50MM(A/INSERTED)
	RL2700B	H163007	BTC LINK 50MM(A/INSERTED)
⚠	RL900	JFJ00071	AC P/RELAY LK1AF-12V BEAB
	SW001	E139506	5 WAY TACT SWITCH
⚠	SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠	T701	J2436771	FBT-C87LLI ~BEABT
	T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠	T900	L380122	SMT-SLOT FAE42/15 BEABT
	TH900	E441044	PTC TYPE 2322-662-96609
	VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
	VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
	W013	EC520502	7/0.2 S000010
	W014	EC550605	7/0.2mm S000010
	W800	EC5A400A	7/0.2MM S000030
	X001	E516030F	12MHz X'TAL NDK 5MM LEG
	X201	E518064	MKT40MA100P MURATA
	X202	E518069	MKT31.9MA110
	X400	E516056F	24.576MHZ CRYSTAL
	X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
	X502	J2791502	X'TAL 3.58MHZ NDK
	Z005	B975476	3748 JET-MELT ADHESIVE 3M
	Z227/228	B975476	3748 JET-MELT ADHESIVE 3M
	Z308/311U	W470200	1MM 1/D SLEEVING BLACK
	Z901BU	J9451136	UL CSA TUBE N08
	Z904	B912312	WHITE TAPE N069X12X33
	Z905A	W470200	1MM 1/D SLEEVING BLACK
	Z905B	W470200	1MM 1/D SLEEVING BLACK
	ZC706U	B912312	WHITE TAPE N069X12X33
	ZD001	T536179	BZX79C 6V2~PHILIPS~
	ZD003	T536225	BZX79B 6V2 ~PHILIPS~
	ZD200	T536215	BZX 79C 33V~PHILIPS~
	ZD4000	T536177	BZX79C 12V~PHILIPS~
	ZD4001	T536177	BZX79C 12V~PHILIPS~
	ZD4002	T536171	BZX79C36V~PHILIPS~
	ZD4003	T536171	BZX79C36V~PHILIPS~
	ZD4004	T536171	BZX79C36V~PHILIPS~
	ZD4006	T536215	BZX 79C 33V~PHILIPS~
	ZD501	T536186	BZX79C 8V2~PHILIPS~
	ZD502	T536186	BZX79C 8V2~PHILIPS~
	ZD503	T536186	BZX79C 8V2~PHILIPS~
	ZD504	T536284	BZX284-C9V1
	ZD505	T536184	BZX79C 9V1~PHILIPS~
	ZD506	T536184	BZX79C 9V1~PHILIPS~
	ZD507	T536184	BZX79C 9V1~PHILIPS~
	ZD508	T536280	BZX284-C6V2
	ZD600	T536184	BZX79C 9V1~PHILIPS~
	ZD602	T536174	BZX79C 5V1~PHILIPS~
	ZD603	T536259	BZX79C56V
	ZD610	T536237	BZX79B24V~PHILIPS~
	ZD612	T536184	BZX79C 9V1~PHILIPS~
	ZD700	T536236	BZX79B22V~PHILIPS~
	ZD704	T536246	ZENER 18V 1.3W MULL
	ZD705	T536215	BZX 79C 33V~PHILIPS~
	ZD706	T536185	BZX79C 5V6~PHILIPS~
	ZD717	J2339251M	HZS36-ILT
	ZD902	T536246	ZENER 18V 1.3W MULL
	ZD903	T536266	BZV85-C27V
	ZD904	T536176	BZX 79C10V~PHILIPS~
	ZD950	T536207	DIODE BZV10 REF MULLARD
	ZD951	OPTION	NOT FITTED
	ZD954	T536225	BZX79B 6V2 ~PHILIPS~
	ZD957	T536226	BZX79B6V8
	ZD970	J2344122M	PGKE180AG23
	ZR706U	B912312	WHITE TAPE N069X12X33

A528690		**MAIN CHASSIS ASSY**	
	#5000	N936193	A7 CHASSIS FRAME NICAM
	#5001	JBM00041	FERRITE CORES BP53RB
	#5060	G863063	RIVET
	#701	J3333961	GROUNDING SPRING
	#7100	B912319	WHITE GLASS NO69X19X33
⚠	B001	PC50202	A7 MAIN PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299930F	CQ93E2D224KPF
	C2703	J0299931F	POLY CAP 270N 200V
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C432	C353883	GRM40Y5V334Z16PT
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT
	C518	J0800371F	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT
	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C533	C506182	5.6PF 50V 2% DRG NO
	C537	J0893048R	CKM-223K500B-CNT2125
	C538	J0800086	2200u/10V ELEC
	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125
	C546	C150711	CAP 100N 36521104 100V POL
	C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	J0893035R	CKM--222K500B CNT2125
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT

C605	C457759	470N 63V POLY MMK5 RIFA/E	
C608	J0880062R	CQ93M1H224KEB	
C609	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C610	J0890092R	CAP CERAMIC 0.0022uF 50V	
C611	J0800337R	CEL-221M350WMFT	
C613	J0244505R	CER CAP 2n2-K 500V	
C614	J0244505R	CER CAP 2n2-K 500V	
C615	J0244505R	CER CAP 2n2-K 500V	
C701	J0243507R	CK45B2H331KB	
C702	J0257540F	ELEC CAP 4U7 250V	
C703	C142760	12N 1.6KV R/EVOX PHE428	
C704	JAJ00138	CC-222K202R-DF 2N2 2KV	
C705	J0299993F	CAP 18NF 5% 630V POLY	
C706U	C150711	CAP 100N 36521104 100V POL	
C707	JAJ00134	CK45-R3DD 102K-GR	
C708	J0245612F	CK45B3A472K	
C709	J0253952R	CEO4W2C1ROMP	
C710	J0253952R	CEO4W2C1ROMP	
C711	J0299932F	CQ93E2D334KPF	
C712	J0299929F	POLY CAP 180N 200V	
C713	J0299934F	CAP POLYPRO FILM 0.47UF	
C714	J0299934F	CAP POLYPRO FILM 0.47UF	
C715	J0243512R	CK45B2H821KB	
C716	C140707	CAP 10N 365-51103 MULARD	
C717	J0244213R	CKL-152K202R-DLT	
C719	J0253966F	CEO4W2D470N SME ECC	
C720	J0244503R	CK45B2H152KB	
C721	J0250511R	CAP POLY 0.022UF PHILIPS	
C724	J0800303R	ELECT CAP 22UF 50V SMG	
C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV	
C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV	
C736	J0880048R	CQT223K50MB (PANASONIC)	
C737	C160708	1UF +-10% 250V 368-45105	
C744	J0880048R	CQT223K50MB (PANASONIC)	
C749	J0880033R	CQM-152K500HFT	
C760U	JAJ00138	CC-222K202R-DF 2N2 2KV	
C901	C648751	68NF 20% X2 250V ~BEABT	
C902	J0262774N	0.22UF 250VAC X2 ~BEABT	
C903	C648751	68NF 20% X2 250V ~BEABT	
C904	C648751	68NF 20% X2 250V ~BEABT	
C905	C001544	220uf 400V SMG 30x35MM	
C906	J0800326R	CEL-101M160WMFT	
C907	J0244501R	CER CAP 1000PF-K 500V	
C908	J0244501R	CER CAP 1000PF-K 500V	
C909	JAJ00127R	CK45-R3DD 331K	
C910	J0880044R	CAP POLYESTER 0.01UF K50V	
C911	J0800303R	ELECT CAP 22UF 50V SMG	
C912	J0890081R	CK45B1H331KB (MURATA)	
C913	J0800335R	CAP ELECT 220UF 16V SMG	
C914	J0800294R	ELECT CAP 10UF 50V SMG	
C915	J0800356F	CEO4W1H471M (SMG)	
C916	J0244501R	CER CAP 1000PF-K 500V	
C917	J0880033R	CQM-152K500HFT	
C918	J0800335R	CAP ELECT 220UF 16V SMG	
C919	J0244501R	CER CAP 1000PF-K 500V	
C922	J0890078R	CK45B1H221KB (MURATA)	
C923	J0880037R	CQM332K500HFT	
C924	J0880037R	CQM332K500HFT	
C925	J0890075R	CER CAP 120pf-J 50V SL	
C926	J0880194R	0.1UF 50V +-5% (100N)	
C926A	J0243509R	CERAMIC CAP 470p 500V	
C950	JAJ00129R	CK45-R3DD 471K	
C951	J0243509R	CERAMIC CAP 470p 500V	
C952	J0243509R	CERAMIC CAP 470p 500V	
C955	J0253935F	ELEC CAP 3300uF 35V 7.5	
C956	J0244505R	CER CAP 2n2-K 500V	
C957	J0800363F	CEO4W1F102M (SMG)	
C958	J0253492	CAP ELEC 150UF-M 200V	
C961	J0800279R	ELECT CAP 1.UF 50V	
C962	J0880033R	CQM-152K500HFT	
C963	J0800329R	ELECT CAP 100UF 50V SMG	
C964	J0800288R	CAP ELECTRO 4.7UF-M 50V	
C967	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C970	J0800359F	CAP ELEC 1000uf-M SMG 10V	
C971	J0800294R	ELECT CAP 10UF 50V SMG	
C972	J0800329R	ELECT CAP 100UF 50V SMG	
C974	J0800353R	CAP ELECTRO 470UF 16V	
C976	J0880194R	0.1UF 50V +-5% (100N)	
C977	J0259431F	ELEC CAP 220UF 200V	
C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V	
C979	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C998	C333753	3N3 "Y"CLASS PME294 BEABT	
C999	C130753	1N0 "Y" PME294 UL BEABT	
CLIP	N235034	HEATSINK CLIP	
CP202	E518058	K9260M SAW DK/BG SOUND	
CP501	E518053	K3953M	
CRT BASE	A527250	A7 28" 16:9 CRT BASE	
D001	J2348921M	DIODE 1N4531	
D002	J2348921M	DIODE 1N4531	
D003	J2348921M	DIODE 1N4531	
D004	J2348921M	DIODE 1N4531	
D020	T531055	DIODE BAT85 SCHOTTKY MULL	
D200	J2348921M	DIODE 1N4531	
D2700	T531053	DIODE IN4148 MULL/PHIL/ITT	
D300	T531068	DIODE MA723/TP PANASONIC	
D301	T531068	DIODE MA723/TP PANASONIC	
D302	T531068	DIODE MA723/TP PANASONIC	
D504	T431113	DIODE BYD33J MULL BEAB	
D505	T531056	DIODE BYV10-40 ~MULLARD	
D506	T531056	DIODE BYV10-40 ~MULLARD	
D6	J2342834M	D10 BZX79B3V3	
D601	J2348921M	DIODE 1N4531	
D7	J2342834M	D10 BZX79B3V3	
D701	J2336612	RU3AM	
D702	T431113	DIODE BYD33J MULL BEAB	
D703	J2343941M	RGP10G	
D706	T431117F	DIODE BY228 P/F PHILIPS	
D707	T531086F	BYW96E	
D708	J2348921M	DIODE 1N4531	
D709U	J2348921M	DIODE 1N4531	
D710	T431117F	DIODE BY228 P/F PHILIPS	
D711	OPTION	NOT FITTED	
D713	T431113	DIODE BYD33J MULL BEAB	
D714	T431113	DIODE BYD33J MULL BEAB	
D719	T431113	DIODE BYD33J MULL BEAB	
D732	T531055	DIODE BAT85 SCHOTTKY MULL	
D8	J2342834M	D10 BZX79B3V3	
D901	J2342711M	DIODE EM2A (SANKEN)	
D901BU	J2348921M	DIODE 1N4531	
D902	J2342711M	DIODE EM2A (SANKEN)	
D903	J2342711M	DIODE EM2A (SANKEN)	
D904	J2342711M	DIODE EM2A (SANKEN)	
D905	J2343962M	MPG06G	
D906	J2343962M	MPG06G	
D907	T531053	DIODE IN4148 MULL/PHIL/ITT	
D908	T531056	DIODE BYV10-40 ~MULLARD	
D909	T531053	DIODE IN4148 MULL/PHIL/ITT	
D910	J2343962M	MPG06G	
D911	T431113	DIODE BYD33J MULL BEAB	
D915	T531068	DIODE MA723/TP PANASONIC	
D917	T431113	DIODE BYD33J MULL BEAB	
D949	J2348921M	DIODE 1N4531	
D950	T431127	BYR29F-700	
D950A	H224081	F9-4-186E ILS	
D951	T431145	BYW29E-200	
D951A	J4520883	M3X12 WITH SPRG WASHER	
D951B	J8821114	NUT 3	
D952	J2349991	DIO-BYW29F-200	
D954	J2348921M	DIODE 1N4531	
D955	J2348921M	DIODE 1N4531	

	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D963	J2348921M	DIODE 1N4531
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	DRG ASSY	A527900	A7 UP ISS DRWG ASSY
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB450	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380115	LIN COIL LSLH13JW05SH
	L703	J2123781R	FILTER COIL EL101K
	L751	J2220641	E/W INJECTION COIL
	L752	L380147	&BRIDGE COIL
⚠	L901	L210063	M-FIL B82724-J2142-N1 BEAB
⚠	L902	L210063	M-FIL B82724-J2142-N1 BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED001	T547050	&SLR37VC3F LED ROHM
	MD701	DRG0266	MODIFICATION DRAWING
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B

Q508	J2315891R	TRS JC548B
Q601	T636077	&IRFS530A ISOL SAMSUNG
Q601B	J4520889	SCREW
Q601D	J8821114	NUT 3
Q701	T633137	TRANS BF459 MULLARD/SES
Q703	J2315891R	TRS JC548B
Q751	J2315451	TRS-BU2508AF
Q751A	H235305	HEATSINK G7PS 3
Q751B	G884027	SPRING CLIP
Q901	T636077	&IRFS530A ISOL SAMSUNG
Q902	J2315921R	TRS JC558B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235417	POWER HEATSINK(COPPER)
Q903B	G884027	SPRING CLIP
Q903C	B976404	HEAT SINK COMPOUND 340
Q905	T633133	TRANS BF422 BAND MULL/AEG
Q906	J2315891R	TRS JC548B
Q907	J2315891R	TRS JC548B
Q908	J2315891R	TRS JC548B
Q950	J2315891R	TRS JC548B
Q951	T632084	BD438 TRANS'R MOTOROLA
Q952	T631265	BC546B
Q954	T633133	TRANS BF422 BAND MULL/AEG
Q957	T636069	BD909 SGS NON-IS0
Q957A	H234344	POWER HEATSINK G7PS3
Q957B	G311331	M3 FULLNUT
Q957C	B976404	HEAT SINK COMPOUND 340
Q957D	F133310	M3X10MM POZI PAN M/C SCRW
Q957E	G560331	M3 SPRING WASHER~TR FAST~
Q959	J2315891R	TRS JC548B
R001	J0700027M	100R 1/16W C/FILM 5%
R002	J0700027M	100R 1/16W C/FILM 5%
R003	J0700027M	100R 1/16W C/FILM 5%
R004	J0700027M	100R 1/16W C/FILM 5%
R005	J0700027M	100R 1/16W C/FILM 5%
R006	J0195875R	RMC73S 2A101JR
R008	J0195912R	RMC73S 2A332JR
R010	E770091	EMI FILTER MURATA
R011	E770091	EMI FILTER MURATA
R012	J0700027M	100R 1/16W C/FILM 5%
R013	J0700027M	100R 1/16W C/FILM 5%
R015	J0700059M	27K 1/16W C/FILM 5%
R016	J0700034M	330R 1/16W C/FILM 5%
R017	J0187060M	RD14S1J621JB
R019	J0700054M	10K 1/16W C/FILM 5%
R020	J0700042M	1K2 1/16W C/FILM 5%
R021	J0700045M	2K2 1/16W C/FILM 5%
R023	J0700027M	100R 1/16W C/FILM 5%
R024	J0700027M	100R 1/16W C/FILM 5%
R025	J0700027M	100R 1/16W C/FILM 5%
R026	J0700027M	100R 1/16W C/FILM 5%
R028	J0195875R	RMC73S 2A101JR
R029	J0195875R	RMC73S 2A101JR
R030	J0195875R	RMC73S 2A101JR
R031	J0700027M	100R 1/16W C/FILM 5%
R032	J0700027M	100R 1/16W C/FILM 5%
R033	J0700027M	100R 1/16W C/FILM 5%
R034	J0700027M	100R 1/16W C/FILM 5%
R037	J0700027M	100R 1/16W C/FILM 5%
R038	J0700027M	100R 1/16W C/FILM 5%
R039	J0700027M	100R 1/16W C/FILM 5%
R044	E770091	EMI FILTER MURATA
R045	E770091	EMI FILTER MURATA
R046	E770091	EMI FILTER MURATA
R047	E770091	EMI FILTER MURATA
R048	E770091	EMI FILTER MURATA
R049	J0195885R	RMC73S 2A271JR
R050	J0195885R	RMC73S 2A271JR
R051	J0195885R	RMC73S 2A271JR
R052	J0195885R	RMC73S 2A271JR
R053	J0195885R	RMC73S 2A271JR
R054	J0195885R	RMC73S 2A271JR
R055	J0195885R	RMC73S 2A271JR
R056	J0195885R	RMC73S 2A271JR
R057	J0195885R	RMC73S 2A271JR
R058	J0195885R	RMC73S 2A271JR
R059	J0195885R	RMC73S 2A271JR
R065	R222330	220R 1/4W DRG NO
R067	J0700054M	10K 1/16W C/FILM 5%
R068	J0700054M	10K 1/16W C/FILM 5%
R069	J0700054M	10K 1/16W C/FILM 5%
R071	J0700054M	10K 1/16W C/FILM 5%
R072	J0700054M	10K 1/16W C/FILM 5%
R073	J0700049M	4K7 1/16W C/FILM 5%
R074	J0700049M	4K7 1/16W C/FILM 5%
R075	J0700027M	100R 1/16W C/FILM 5%
R076	J0700027M	100R 1/16W C/FILM 5%
R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R214	J0187086M	RD14S1J752JB

R22	J0195250R	RMC73S 000R	
R220	J0700045M	2K2 1/16W C/FILM 5%	
R221	J0700038M	680R 1/16W C/FILM 5%	
R222	J0700027M	100R 1/16W C/FILM 5%	
R223	J0700035M	390R 1/16W C/FILM 5%	
R224	J0700046M	2K7 1/16W C/FILM 5%	
R225	J0700058M	22K 1/16W C/FILM 5%	
R226	J0700058M	22K 1/16W C/FILM 5%	
R227	J0700038M	680R 1/16W C/FILM 5%	
R228	J0700034M	330R 1/16W C/FILM 5%	
R230	J0700044M	1K8 1/16W C/FILM 5%	
R26	J0195250R	RMC73S 000R	
R27	J0195250R	RMC73S 000R	
R2700	R120330	100R 1/4W DRG NO	
R3	J0195013R	RMC73 2B102JR	
R300	R715330	75R 1/4W DRG NO	
R301	J0700054M	10K 1/16W C/FILM 5%	
R302	R715330	75R 1/4W DRG NO	
R303	J0700052M	6K8 1/16W C/FILM 5%	
R304	J0700054M	10K 1/16W C/FILM 5%	
R305	J0700067M	100K 1/16W C/FILM 5%	
R306	J0700036M	470R 1/16W C/FILM 5%	
R307	J0700036M	470R 1/16W C/FILM 5%	
R308	J0700067M	100K 1/16W C/FILM 5%	
R309	J0700054M	10K 1/16W C/FILM 5%	
R310	R120330	100R 1/4W DRG NO	
R311	R715330	75R 1/4W DRG NO	
R312	R715330	75R 1/4W DRG NO	
R313	R715330	75R 1/4W DRG NO	
R314	R120330	100R 1/4W DRG NO	
R315	R120330	100R 1/4W DRG NO	
R316	J0700052M	6K8 1/16W C/FILM 5%	
R317	J0700054M	10K 1/16W C/FILM 5%	
R318	R715330	75R 1/4W DRG NO	
R319	J0700067M	100K 1/16W C/FILM 5%	
R320	J0700036M	470R 1/16W C/FILM 5%	
R321	J0700036M	470R 1/16W C/FILM 5%	
R322	R715330	75R 1/4W DRG NO	
R323	J0700067M	100K 1/16W C/FILM 5%	
R324	J0700064M	56K 1/16W C/FILM 5%	
R325	J0700067M	100K 1/16W C/FILM 5%	
R326	J0700027M	100R 1/16W C/FILM 5%	
R327	J0700064M	56K 1/16W C/FILM 5%	
R328	J0700064M	56K 1/16W C/FILM 5%	
R329	J0700027M	100R 1/16W C/FILM 5%	
R330	J0700067M	100K 1/16W C/FILM 5%	
R331	J0700064M	56K 1/16W C/FILM 5%	
R334	R715330	75R 1/4W DRG NO	
R335	J0700027M	100R 1/16W C/FILM 5%	
R337	J0700038M	680R 1/16W C/FILM 5%	
R338	J0700058M	22K 1/16W C/FILM 5%	
R339	J0700027M	100R 1/16W C/FILM 5%	
R340	J0700054M	10K 1/16W C/FILM 5%	
R341	R110330	10R 1/4W DRG NO	
R349	J0700027M	100R 1/16W C/FILM 5%	
R350	J0700054M	10K 1/16W C/FILM 5%	
R351	J0700058M	22K 1/16W C/FILM 5%	
R352	J0700038M	680R 1/16W C/FILM 5%	
R4	J0195925R	RMC73S 2A103JR	
R400	J0700027M	100R 1/16W C/FILM 5%	
R4001	J0700054M	10K 1/16W C/FILM 5%	
R4002	J0700054M	10K 1/16W C/FILM 5%	
R4004	R132330	1K2 1/4W DRG NO	
R4005	R417330	47R 1/4W DRG NO	
R4006	R921330	910R 1/4W DRG NO	
R4007	R132330	1K2 1/4W DRG NO	
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~	
R4009	R417330	47R 1/4W DRG NO	
R401	J0700027M	100R 1/16W C/FILM 5%	
R4010	J0700064M	56K 1/16W C/FILM 5%	
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~	
R4014	R526330	560R 1/4W DRG NO	
R4015	R526330	560R 1/4W DRG NO	
R403	J0700054M	10K 1/16W C/FILM 5%	
R408	J0195250R	RMC73S 000R	
R410	J0700041M	1K 1/16W C/FILM 5%	
R411	J0700041M	1K 1/16W C/FILM 5%	
R412	J0700057M	18K 1/16W C/FILM 5%	
R413	J0700057M	18K 1/16W C/FILM 5%	
R414	J0700057M	18K 1/16W C/FILM 5%	
R415	J0700057M	18K 1/16W C/FILM 5%	
R416	J0195885R	RMC73S 2A271JR	
R417	J0195250R	RMC73S 000R	
R418	J0195931R	RMC73S 2A183JR	
R419	J0195931R	RMC73S 2A183JR	
R449	J0700054M	10K 1/16W C/FILM 5%	
R501	J0700035M	390R 1/16W C/FILM 5%	
R502	J0700041M	1K 1/16W C/FILM 5%	
R503	J0700027M	100R 1/16W C/FILM 5%	
R504	J0700027M	100R 1/16W C/FILM 5%	
R505	J0700032M	220R 1/16W C/FILM 5%	
R508	J0700041M	1K 1/16W C/FILM 5%	
R509U	J0700052M	6K8 1/16W C/FILM 5%	
R513	J0700041M	1K 1/16W C/FILM 5%	
R514	J0700027M	100R 1/16W C/FILM 5%	
R515	J0700027M	100R 1/16W C/FILM 5%	
R516	J0700027M	100R 1/16W C/FILM 5%	
R517	J0700052M	6K8 1/16W C/FILM 5%	
R523	J0700067M	100K 1/16W C/FILM 5%	
R524	R323330	330R 1/4W DRG NO	
R525	J0700058M	22K 1/16W C/FILM 5%	
R526	J0700058M	22K 1/16W C/FILM 5%	
R532	R128330	180R 1/4W DRG NO	
R534	J0700027M	100R 1/16W C/FILM 5%	
R536	R120330	100R 1/4W DRG NO	
R537	J0700059M	27K 1/16W C/FILM 5%	
R538	J0700063M	47K 1/16W C/FILM 5%	
R539	J0700056M	15K 1/16W C/FILM 5%	
R542	J0195941R	RMC73S 2A473JR	
R543	J0700067M	100K 1/16W C/FILM 5%	
R544	J0700069M	150K 1/16W C/FILM 5%	
R545	R349725	39K MRS16T 1% M/FILM	
R549	J0700029M	150R 1/16W C/FILM 5%	
R550	R110330	10R 1/4W DRG NO	
R551	J0187071M	RES 1K8 1/16W	
R552	J0700027M	100R 1/16W C/FILM 5%	
R560	J0195947R	RMC73S 2A823JR	
R570	J0195250R	RMC73S 000R	
R571	J0195250R	RMC73S 000R	
R600	R437330	4K7 1/4W DRG NO	
R601	R330330	3K 1/4W DRG NO	
R602	R100736	1R 1/4W 1% MFR4	
R603	R202330	2R2 1/4W DRG NO	
R610	R140330	10K 1/4W DRG NO	
R612	R447330	47K 1/4W DRG NO	
R614	J0113735M	RD14S2H271JB	
R619	J0147630	7W 6.8R WIRE WOUND ~PAN~	
R623	J0113725M	100R RES CARBON FILM 1/2W	
R701	J0140933S	RSL-472J7WS(BSR-Z)	
R702	R120330	100R 1/4W DRG NO	
R704	J0700027M	100R 1/16W C/FILM 5%	
R706U	R100330	1R0 1/4W DRG NO	
R707	R437330	4K7 1/4W DRG NO	
R709	R319330	39R 1/4W DRG NO	
R714	J0113748M	RD14S2H821JB	
R715	R140570	10K 1W 5% MO1SL F	
R718	R254736	240K 1/4W M/F MFR4 1%	
R719	J0119647M	RN14S2B473FB	
R724	J0110273S	RSO8B3D153JS	
R725	R145549	15K FF84~WELWYN~	

A528690

R726	J0113778M	RD14S2H153JB
R732	R155330	150K 1/4W DRG NO
R733	R323330	330R 1/4W DRG NO
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147630	7W 6.8R WIRE WOUND ~PAN~
R752	R447330	47K 1/4W DRG NO
R759	R437330	4K7 1/4W DRG NO
R764	R658330	680K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0100101M	RD14S2B333JB
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%
R955	R457725	470K 1/16W MRS16T 1% M/F
R956	R132330	1K2 1/4W DRG NO
R957	J0700049M	4K7 1/16W C/FILM 5%
R958	J0700041M	1K 1/16W C/FILM 5%
R959	R145725	15K MRS16T 1% M/FILM
R960	J0700049M	4K7 1/16W C/FILM 5%
R961	R832725	8K2 MRS16T 1% M/FILM
R962	J0700067M	100K 1/16W C/FILM 5%
R963	R252725	220K 1/16W MRS16T 1% M/F
R964	R437725	4K7 MRS16T 1% M/FILM
R966	R437725	4K7 MRS16T 1% M/FILM
R967	R000708	11.5K MRS16T 1% 1/16W
R968	R140725	10K MRS16T 1% M/FILM
R969	R140725	10K MRS16T 1% M/FILM
R970	R141725	11K MRS16T 1% M/FILM
R971	J0700054M	10K 1/16W C/FILM 5%
R972	R000709	64.9K MRS16T 1% 1/16W
R973	R941725	91K MRS16T 1% M/FILM
R974	J0147516	RES 1R 5W 7APK
R977	OPTION	NOT FITTED
R981	J0700046M	2K7 1/16W C/FILM 5%
R982	R130330	1K 1/4W DRG NO
R985	R427571	470R 2W 5% M02S F
R986	R526571	560R 2W 5% M02S F
R989	R407542	4R7 1W FF83 WELWYN
R991	J0700054M	10K 1/16W C/FILM 5%
R992	R628858	680R 4W VTM KP292 15mmP
R993	J0700041M	1K 1/16W C/FILM 5%
⚠ R999	R170727	10M 1W VR68 UL BEAB
⚠ RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
SW001	E139506	5 WAY TACT SWITCH
⚠ SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠ T701	J2436771	FBT-C87LLI ~BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠ T900	L380122	SMT-SLOT FAE42/15 BEABT
TH900	E441044	PTC TYPE 2322-662-96609
U201	E710060	& UE25-B57D UK (VA)
VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
W012	EC520802	7/0.2MM S000029
W2700	W024001	0.56ML SFT TIN'D COP WIRE
W800	EC5A400A	7/0.2MM S000030
X001	E516030F	12MHz X'TAL NDK 5MM LEG
X400	E516056F	24.576MHZ CRYSTAL
X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
X502	J2791502	X'TAL 3.58MHZ NDK
Z901BU	J9451136	UL CSA TUBE N08
Z904	B912312	WHITE TAPE N069X12X33
Z905A	W470200	1MM 1/D SLEEVING BLACK
Z905B	W470200	1MM 1/D SLEEVING BLACK
ZC706U	B912312	WHITE TAPE N069X12X33
ZD001	T536179	BZX79C 6V2~PHILIPS~
ZD003	T536225	BZX79B 6V2 ~PHILIPS~
ZD200	T536215	BZX 79C 33V~PHILIPS~
ZD4000	T536177	BZX79C 12V~PHILIPS~
ZD4001	T536177	BZX79C 12V~PHILIPS~
ZD4002	T536171	BZX79C36V~PHILIPS~
ZD4003	T536171	BZX79C36V~PHILIPS~
ZD4004	T536171	BZX79C36V~PHILIPS~
ZD4006	T536215	BZX 79C 33V~PHILIPS~
ZD4500	T536177	BZX79C 12V~PHILIPS~
ZD4501	T536177	BZX79C 12V~PHILIPS~
ZD4502	T536177	BZX79C 12V~PHILIPS~
ZD4503	T536177	BZX79C 12V~PHILIPS~
ZD501	T536186	BZX79C 8V2~PHILIPS~
ZD502	T536186	BZX79C 8V2~PHILIPS~
ZD503	T536186	BZX79C 8V2~PHILIPS~
ZD504	T536284	BZX284-C9V1
ZD505	T536184	BZX79C 9V1~PHILIPS~
ZD506	T536184	BZX79C 9V1~PHILIPS~
ZD507	T536184	BZX79C 9V1~PHILIPS~
ZD508	T536280	BZX284-C6V2
ZD600	T536184	BZX79C 9V1~PHILIPS~
ZD602	T536174	BZX79C 5V1~PHILIPS~
ZD603	T536259	BZX79C56V
ZD610	T536237	BZX79B24V~PHILIPS~
ZD612	T536184	BZX79C 9V1~PHILIPS~
ZD700	T536236	BZX79B22V~PHILIPS~
ZD704	T536246	ZENER 18V 1.3W MULL
ZD705	T536215	BZX 79C 33V~PHILIPS~
ZD706	T536185	BZX79C 5V6~PHILIPS~
ZD717	J2339251M	HZS36-ILT
ZD902	T536246	ZENER 18V 1.3W MULL
ZD903	T536266	BZV85-C27V
ZD904	T536176	BZX 79C10V~PHILIPS~
ZD950	T536207	DIODE BZV10 REF MULLARD
ZD957	T536226	BZX79B6V8
ZD970	J2344122M	PGKE180AG23
ZR706U	B912312	WHITE TAPE N069X12X33

A528710		**MAIN CHASSIS ASSY**	
	#5000	N936191	A7 CHASSIS FRAME DOLBY
	#5001	JBM00041	FERRITE CORES BP53RB
	#5060	G863063	RIVET
	#701	J3333961	GROUNDING SPRING
	#7100	B912319	WHITE GLASS NO69X19X33
	#E1	G864006	CABLE TIE T18R
⚠	B001	PC50202	A7 MAIN PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299930F	CQ93E2D224KPF
	C2703	J0299931F	POLY CAP 270N 200V
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C430	J0228736R	CC73SSL1H180JR
	C432	C353883	GRM40Y5V334Z16PT
	C450	J0880194R	0.1UF 50V +-5% (100N)
	C4501	J0893048R	CKM-223K500B-CNT2125
	C4502	J0800326R	CEL-101M160WMFT
	C4503	J0893048R	CKM-223K500B-CNT2125
	C4504	J0800326R	CEL-101M160WMFT
	C4505	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4506	J0800326R	CEL-101M160WMFT
	C4507	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4508	J0800326R	CEL-101M160WMFT
	C451	J0800324R	C/ELEC 100UF M SMG 6.3V
	C452	J0880194R	0.1UF 50V +-5% (100N)
	C453	J0800324R	C/ELEC 100UF M SMG 6.3V
	C454	J0880194R	0.1UF 50V +-5% (100N)
	C455	J0800324R	C/ELEC 100UF M SMG 6.3V
	C474	J0800291R	CAP ELEC 10uF 16V SMG
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT
	C518	J0800371F	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT
	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C532	OPTION	NOT FITTED
	C533	C506182	5.6PF 50V 2% DRG NO
	C537	J0893048R	CKM-223K500B-CNT2125
	C538	J0800086	2200u/10V ELEC

	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125
	C546	C150711	CAP 100N 36521104 100V POL
	C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	J0893035R	CKM--222K500B CNT2125
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E
	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C701	J0243507R	CK45B2H331KB
	C702	J0253971F	CEO4W2E4R7HRF
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	JAJ00138	CC-222K202R-DF 2N2 2KV
	C705	J0299993F	CAP 18NF 5% 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	JAJ00134	CK45-R3DD 102K-GR
	C708	J0245612F	CK45B3A472K
	C709	J0253952R	CEO4W2C1ROMP
	C710	J0253952R	CEO4W2C1ROMP
	C711	J0299932F	CQ93E2D334KPF
	C712	J0299929F	POLY CAP 180N 200V
	C713	J0299934F	CAP POLYPRO FILM 0.47UF
	C714	J0299934F	CAP POLYPRO FILM 0.47UF
	C715	J0243512R	CK45B2H821KB
	C716	C140707	CAP 10N 365-51103 MULARD
	C717	J0244213R	CKL-152K202R-DLT
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C724	J0800303R	ELECT CAP 22UF 50V SMG
	C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C737	C160708	1UF +-10% 250V 368-45105
	C744	J0880048R	CQT223K50MB (PANASONIC)
	C749	J0880033R	CQM-152K500HFT
	C760U	JAJ00138	CC-222K202R-DF 2N2 2KV
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C964	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C965	J0800294R	ELECT CAP 10UF 50V SMG
	C966	J0800329R	ELECT CAP 100UF 50V SMG
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333753	3N3 "Y"CLASS PME294 BEABT
⚠	C999	C130753	1N0 "Y" PME294 UL BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518058	K9260M SAW DK/BG SOUND
	CP501	E518053	K3953M
	CRT BASE	A527250	A7 28" 16:9 CRT BASE
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D506	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D732	T531055	DIODE BAT85 SCHOTTKY MULL
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G
	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD

	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D953U	J2348921M	DIODE 1N4531
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D962	J2348921M	DIODE 1N4531
	D963	J2348921M	DIODE 1N4531
	D964	J2343962M	MPG06G
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	DRG ASSY	A527900	A7 UP ISS DRWG ASSY
	E006	E846903	2 WAY LEAD
	E1	E843243	CPT EARTH LEAD
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E4500	E826157	QUAD PHONO SKT 86 SER
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
	E903	E826148	PHONO SKT BLACK S000043
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB450	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB451	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB452	E770091	EMI FILTER MURATA
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC450	T900724	YSS241-F/YSS241B-F
	IC453	T900765	DOLBY IC YSS909-M
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC953	T900862	L78M12CV 500mA
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L4500	J2122943M	AXIAL COIL 10UH-J
	L4501	J2122943M	AXIAL COIL 10UH-J
	L4502	J2122943M	AXIAL COIL 10UH-J
	L4503	J2122943M	AXIAL COIL 10UH-J
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380115	LIN COIL LSLH13JW05SH
	L703	J2123781R	FILTER COIL EL101K
	L751	J2220641	E/W INJECTION COIL
	L752	L380147	&BRIDGE COIL
⚠	L901	L210063	M-FIL B82724-J2142-N1 BEAB
⚠	L902	L210063	M-FIL B82724-J2142-N1 BEAB
	L904	J2125579	CHOKE COIL 47UH

	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED001	T547050	&SLR37VC3F LED ROHM
	PL006	J2902261	PLG-02P2R5VPWB
	PL007	J2902261	PLG-02P2R5VPWB
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q4503	W024001	0.56ML SFT TIN'D COP WIRE
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B
	Q508	J2315891R	TRS JC548B
	Q601	T636077	&IRFS530A ISOL SAMSUNG
	Q601B	J4520889	SCREW
	Q601D	J8821114	NUT 3
	Q701	T633137	TRANS BF459 MULLARD/SES
	Q703	J2315891R	TRS JC548B
	Q751	J2315451	TRS-BU2508AF
	Q751A	H235305	HEATSINK G7PS 3
	Q751B	G884027	SPRING CLIP
	Q901	T636077	&IRFS530A ISOL SAMSUNG
	Q902	J2315921R	TRS JC558B
	Q903	T636072	BUT12AF NON SELECTED
	Q903A	H235417	POWER HEATSINK(COPPER)
	Q903B	G884027	SPRING CLIP
	Q903C	B976404	HEAT SINK COMPOUND 340
	Q905	T633133	TRANS BF422 BAND MULL/AEG
	Q906	J2315891R	TRS JC548B
	Q907	J2315891R	TRS JC548B
	Q908	J2315891R	TRS JC548B
	Q950	J2315891R	TRS JC548B
	Q951	T632084	BD438 TRANS'R MOTOROLA
	Q952	T631265	BC546B
	Q954	T633133	TRANS BF422 BAND MULL/AEG
	Q957	T636069	BD909 SGS NON-IS0
	Q957A	H234344	POWER HEATSINK G7PS3
	Q957B	G311331	M3 FULLNUT
	Q957C	B976404	HEAT SINK COMPOUND 340
	Q957D	F133310	M3X10MM POZI PAN M/C SCRW
	Q957E	G560331	M3 SPRING WASHER~TR FAST~
	Q959	J2315891R	TRS JC548B
	R001	J0700027M	100R 1/16W C/FILM 5%
	R002	J0700027M	100R 1/16W C/FILM 5%
	R003	J0700027M	100R 1/16W C/FILM 5%
	R004	J0700027M	100R 1/16W C/FILM 5%
	R005	J0700027M	100R 1/16W C/FILM 5%
	R006	J0195875R	RMC73S 2A101JR
	R008	J0195912R	RMC73S 2A332JR
	R010	E770091	EMI FILTER MURATA
	R011	E770091	EMI FILTER MURATA
	R012	J0700027M	100R 1/16W C/FILM 5%
	R013	J0700027M	100R 1/16W C/FILM 5%
	R015	J0700059M	27K 1/16W C/FILM 5%
	R016	J0700034M	330R 1/16W C/FILM 5%
	R017	J0187060M	RD14S1J621JB
	R019	J0700054M	10K 1/16W C/FILM 5%
	R020	J0700042M	1K2 1/16W C/FILM 5%
	R021	J0700045M	2K2 1/16W C/FILM 5%
	R023	J0700027M	100R 1/16W C/FILM 5%
	R024	J0700027M	100R 1/16W C/FILM 5%
	R025	J0700027M	100R 1/16W C/FILM 5%
	R026	J0700027M	100R 1/16W C/FILM 5%
	R028	J0195875R	RMC73S 2A101JR
	R029	J0195875R	RMC73S 2A101JR
	R030	J0195875R	RMC73S 2A101JR
	R031	J0700027M	100R 1/16W C/FILM 5%
	R032	J0700027M	100R 1/16W C/FILM 5%
	R033	J0700027M	100R 1/16W C/FILM 5%
	R034	J0700027M	100R 1/16W C/FILM 5%
	R037	J0700027M	100R 1/16W C/FILM 5%
	R038	J0700027M	100R 1/16W C/FILM 5%
	R039	J0700027M	100R 1/16W C/FILM 5%
	R044	E770091	EMI FILTER MURATA
	R045	E770091	EMI FILTER MURATA
	R046	E770091	EMI FILTER MURATA
	R047	E770091	EMI FILTER MURATA
	R048	E770091	EMI FILTER MURATA
	R049	J0195885R	RMC73S 2A271JR
	R050	J0195885R	RMC73S 2A271JR
	R051	J0195885R	RMC73S 2A271JR
	R052	J0195885R	RMC73S 2A271JR
	R053	J0195885R	RMC73S 2A271JR
	R054	J0195885R	RMC73S 2A271JR
	R055	J0195885R	RMC73S 2A271JR
	R056	J0195885R	RMC73S 2A271JR
	R057	J0195885R	RMC73S 2A271JR
	R058	J0195885R	RMC73S 2A271JR
	R059	J0195885R	RMC73S 2A271JR
	R065	R222330	220R 1/4W DRG NO
	R067	J0700054M	10K 1/16W C/FILM 5%
	R068	J0700054M	10K 1/16W C/FILM 5%
	R069	J0700054M	10K 1/16W C/FILM 5%
	R071	J0700054M	10K 1/16W C/FILM 5%
	R072	J0700054M	10K 1/16W C/FILM 5%
	R073	J0700049M	4K7 1/16W C/FILM 5%
	R074	J0700049M	4K7 1/16W C/FILM 5%
	R075	J0700027M	100R 1/16W C/FILM 5%
	R076	J0700027M	100R 1/16W C/FILM 5%
	R077	J0700027M	100R 1/16W C/FILM 5%
	R078	J0700027M	100R 1/16W C/FILM 5%
	R079	J0195875R	RMC73S 2A101JR
	R080	J0700027M	100R 1/16W C/FILM 5%
	R081	J0700027M	100R 1/16W C/FILM 5%
	R082	J0700054M	10K 1/16W C/FILM 5%
	R083	J0700027M	100R 1/16W C/FILM 5%
	R084	J0700027M	100R 1/16W C/FILM 5%
	R085	J0700027M	100R 1/16W C/FILM 5%
	R086	J0700027M	100R 1/16W C/FILM 5%
	R087	J0700054M	10K 1/16W C/FILM 5%
	R088	J0700054M	10K 1/16W C/FILM 5%
	R089	J0700049M	4K7 1/16W C/FILM 5%
	R090	J0700059M	27K 1/16W C/FILM 5%
	R091	J0700046M	2K7 1/16W C/FILM 5%
	R093	J0700054M	10K 1/16W C/FILM 5%
	R098	J0195925R	RMC73S 2A103JR
	R1	E770091	EMI FILTER MURATA
	R100	R247330	27K 1/4W DRG NO
	R102	R323330	330R 1/4W DRG NO
	R103	J0700027M	100R 1/16W C/FILM 5%
	R107	J0700054M	10K 1/16W C/FILM 5%
	R109	J0700059M	27K 1/16W C/FILM 5%
	R110	J0700027M	100R 1/16W C/FILM 5%
	R112	J0700042M	1K2 1/16W C/FILM 5%

R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R214	J0187086M	RD14S1J752JB
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700044M	1K8 1/16W C/FILM 5%
R2700	R120330	100R 1/4W DRG NO
R3	J0195013R	RMC73 2B102JR
R30	J0195881R	RMC73S 2A181JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO
R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0700057M	18K 1/16W C/FILM 5%
R414	J0700057M	18K 1/16W C/FILM 5%
R415	J0700057M	18K 1/16W C/FILM 5%
R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R430	E770091	EMI FILTER MURATA
R431	J0195881R	RMC73S 2A181JR
R432	J0195881R	RMC73S 2A181JR
R433	J0195881R	RMC73S 2A181JR
R434	J0195881R	RMC73S 2A181JR
R435	J0195881R	RMC73S 2A181JR
R436	J0195881R	RMC73S 2A181JR
R437	J0195881R	RMC73S 2A181JR
R438	J0195881R	RMC73S 2A181JR
R440	E770091	EMI FILTER MURATA
R441	J0195881R	RMC73S 2A181JR
R449	J0700054M	10K 1/16W C/FILM 5%
R450	J0700027M	100R 1/16W C/FILM 5%
R4501	J0700027M	100R 1/16W C/FILM 5%
R4502	J0700027M	100R 1/16W C/FILM 5%
R4503	J0700027M	100R 1/16W C/FILM 5%
R4504	J0700027M	100R 1/16W C/FILM 5%
R4509	J0700067M	100K 1/16W C/FILM 5%
R451	J0700027M	100R 1/16W C/FILM 5%
R4510	J0195950R	RMC73S 2A104JR
R4511	J0195950R	RMC73S 2A104JR
R4512	J0195950R	RMC73S 2A104JR
R4540	J0195250R	RMC73S 000R
R4541	J0195250R	RMC73S 000R
R459	J0700054M	10K 1/16W C/FILM 5%
R464	J0700027M	100R 1/16W C/FILM 5%
R465	J0700027M	100R 1/16W C/FILM 5%
R466	J0700054M	10K 1/16W C/FILM 5%
R469	J0700027M	100R 1/16W C/FILM 5%
R470	J0700054M	10K 1/16W C/FILM 5%

R471	J0700054M	10K 1/16W C/FILM 5%
R472	J0700054M	10K 1/16W C/FILM 5%
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700032M	220R 1/16W C/FILM 5%
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%
R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R532	R128330	180R 1/4W DRG NO
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	J0700067M	100K 1/16W C/FILM 5%
R544	J0700069M	150K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700029M	150R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R
R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R100736	1R 1/4W 1% MFR4
R603	R202330	2R2 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
R623	J0113725M	100R RES CARBON FILM 1/2W
R701	J0140933S	RSL-472J7WS(BSR-Z)
R702	R120330	100R 1/4W DRG NO
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R145549	15K FF84~WELWYN~
R726	J0113778M	RD14S2H153JB
R732	R155330	150K 1/4W DRG NO
R733	R323330	330R 1/4W DRG NO
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147630	7W 6.8R WIRE WOUND ~PAN~
R752	R447330	47K 1/4W DRG NO
R759	R437330	4K7 1/4W DRG NO
R764	R658330	680K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0100101M	RD14S2B333JB
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%
R955	R457725	470K 1/16W MRS16T 1% M/F
R956	R132330	1K2 1/4W DRG NO
R957	J0700049M	4K7 1/16W C/FILM 5%
R958	J0700041M	1K 1/16W C/FILM 5%
R959	R145725	15K MRS16T 1% M/FILM
R960	J0700049M	4K7 1/16W C/FILM 5%
R961	R832725	8K2 MRS16T 1% M/FILM
R962	J0700067M	100K 1/16W C/FILM 5%
R963	R252725	220K 1/16W MRS16T 1% M/F
R964	R437725	4K7 MRS16T 1% M/FILM
R966	R437725	4K7 MRS16T 1% M/FILM
R967	R000708	11.5K MRS16T 1% 1/16W
R968	R140725	10K MRS16T 1% M/FILM
R969	R140725	10K MRS16T 1% M/FILM
R970	R141725	11K MRS16T 1% M/FILM
R971	J0700054M	10K 1/16W C/FILM 5%
R972	R000709	64.9K MRS16T 1% 1/16W
R973	R941725	91K MRS16T 1% M/FILM
R974	J0147516	RES 1R 5W 7APK
R975	J0147054AF	RW99J3D180KAF
R981	J0700046M	2K7 1/16W C/FILM 5%
R982	R130330	1K 1/4W DRG NO
R985	R427571	470R 2W 5% M02S F
R986	R526571	560R 2W 5% M02S F
R989	R407542	4R7 1W FF83 WELWYN
R991	J0700054M	10K 1/16W C/FILM 5%
R992	R628858	680R 4W VTM KP292 15mmP
R993	J0700041M	1K 1/16W C/FILM 5%
⚠ R999	R170727	10M 1W VR68 UL BEAB
⚠ RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
SW001	E139506	5 WAY TACT SWITCH
⚠ SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠ T701	J2436771	FBT-C87LLI ~BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠ T900	L380122	SMT-SLOT FAE42/15 BEABT
TH900	E441044	PTC TYPE 2322-662-96609
U201	E710060	& UE25-B57D UK (VA)
VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)

VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
W003	EC551505	1/0.7MM S000010
W012	EC520802	7/0.2MM S000029
W2700	W024001	0.56ML SFT TIN'D COP WIRE
W800	EC5A400A	7/0.2MM S000030
W953	EC530803	7/0.2MM S000029
X001	E516030F	12MHz X'TAL NDK 5MM LEG
X400	E516056F	24.576MHZ CRYSTAL
X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
X502	J2791502	X'TAL 3.58MHZ NDK
Z901BU	J9451136	UL CSA TUBE N08
Z904	B912312	WHITE TAPE N069X12X33
Z905A	W470200	1MM 1/D SLEEVING BLACK
Z905B	W470200	1MM 1/D SLEEVING BLACK
Z953U	J9451136	UL CSA TUBE N08
ZD001	T536179	BZX79C 6V2~PHILIPS~
ZD003	T536225	BZX79B 6V2 ~PHILIPS~
ZD200	T536215	BZX 79C 33V~PHILIPS~
ZD4000	T536177	BZX79C 12V~PHILIPS~
ZD4001	T536177	BZX79C 12V~PHILIPS~
ZD4002	T536171	BZX79C36V~PHILIPS~
ZD4003	T536171	BZX79C36V~PHILIPS~
ZD4004	T536171	BZX79C36V~PHILIPS~
ZD4006	T536215	BZX 79C 33V~PHILIPS~
ZD4500	T536177	BZX79C 12V~PHILIPS~
ZD4501	T536177	BZX79C 12V~PHILIPS~
ZD4502	T536177	BZX79C 12V~PHILIPS~
ZD4503	T536177	BZX79C 12V~PHILIPS~
ZD501	T536186	BZX79C 8V2~PHILIPS~
ZD502	T536186	BZX79C 8V2~PHILIPS~
ZD503	T536186	BZX79C 8V2~PHILIPS~
ZD504	T536284	BZX284-C9V1
ZD505	T536184	BZX79C 9V1~PHILIPS~
ZD506	T536184	BZX79C 9V1~PHILIPS~
ZD507	T536184	BZX79C 9V1~PHILIPS~
ZD508	T536280	BZX284-C6V2
ZD600	T536184	BZX79C 9V1~PHILIPS~
ZD602	T536174	BZX79C 5V1~PHILIPS~
ZD603	T536259	BZX79C56V
ZD610	T536237	BZX79B24V~PHILIPS~
ZD612	T536184	BZX79C 9V1~PHILIPS~
ZD700	T536236	BZX79B22V~PHILIPS~
ZD704	T536246	ZENER 18V 1.3W MULL
ZD705	T536215	BZX 79C 33V~PHILIPS~
ZD706	T536185	BZX79C 5V6~PHILIPS~
ZD717	J2339251M	HZS36-ILT
ZD902	T536246	ZENER 18V 1.3W MULL
ZD903	T536266	BZV85-C27V
ZD904	T536176	BZX 79C10V~PHILIPS~
ZD950	T536207	DIODE BZV10 REF MULLARD
ZD953U	T536224	BZX79B5V6~PHILIPS~
ZD957	T536226	BZX79B6V8
ZD970	J2344122M	PGKE180AG23
ZR706U	B912312	WHITE TAPE N069X12X33

A529120		**MAIN BOARD**	
	#5000	N936191	A7 CHASSIS FRAME DOLBY
	#5001	JBM00041	FERRITE CORES BP53RB
	#5060	G863063	RIVET
	#701	J3333961	GROUNDING SPRING
	#7100	B912319	WHITE GLASS NO69X19X33
	#E1	G864006	CABLE TIE T18R
⚠	B001	PC50202	A7 MAIN PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299930F	CQ93E2D224KPF
	C2703	J0299931F	POLY CAP 270N 200V
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C430	J0228736R	CC73SSL1H180JR
	C432	C353883	GRM40Y5V334Z16PT
	C450	J0880194R	0.1UF 50V +-5% (100N)
	C4501	J0893048R	CKM-223K500B-CNT2125
	C4502	J0800326R	CEL-101M160WMFT
	C4503	J0893048R	CKM-223K500B-CNT2125
	C4504	J0800326R	CEL-101M160WMFT
	C4505	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4506	J0800326R	CEL-101M160WMFT
	C4507	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4508	J0800326R	CEL-101M160WMFT
	C451	J0800324R	C/ELEC 100UF M SMG 6.3V
	C452	J0880194R	0.1UF 50V +-5% (100N)
	C453	J0800324R	C/ELEC 100UF M SMG 6.3V
	C454	J0880194R	0.1UF 50V +-5% (100N)
	C455	J0800324R	C/ELEC 100UF M SMG 6.3V
	C473	OPTION	NOT FITTED
	C474	J0800291R	CAP ELEC 10uF 16V SMG
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT
	C518	J0800371F	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT
	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C532	OPTION	NOT FITTED
	C533	C506182	5.6PF 50V 2% DRG NO
	C537	J0893048R	CKM-223K500B-CNT2125

	C538	J0800086	2200u/10V ELEC
	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125
	C546	C150711	CAP 100N 36521104 100V POL
	C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	J0893035R	CKM--222K500B CNT2125
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E
	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C701	J0243507R	CK45B2H331KB
	C702	J0253971F	CEO4W2E4R7HRF
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	JAJ00138	CC-222K202R-DF 2N2 2KV
	C705	J0299993F	CAP 18NF 5% 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	JAJ00134	CK45-R3DD 102K-GR
	C708	J0245612F	CK45B3A472K
	C709	J0253952R	CEO4W2C1ROMP
	C710	J0253952R	CEO4W2C1ROMP
	C711	J0299932F	CQ93E2D334KPF
	C712	J0299929F	POLY CAP 180N 200V
	C713	J0299934F	CAP POLYPRO FILM 0.47UF
	C714	J0299934F	CAP POLYPRO FILM 0.47UF
	C715	J0243512R	CK45B2H821KB
	C716	C140707	CAP 10N 365-51103 MULARD
	C717	J0244213R	CKL-152K202R-DLT
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800303R	ELECT CAP 22UF 50V SMG
	C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C737	C160708	1UF +-10% 250V 368-45105
	C744	J0880048R	CQT223K50MB (PANASONIC)
	C749	J0880033R	CQM-152K500HFT
	C760U	JAJ00138	CC-222K202R-DF 2N2 2KV
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C964	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C965	J0800294R	ELECT CAP 10UF 50V SMG
	C966	J0800329R	ELECT CAP 100UF 50V SMG
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333774	Y CAP 3N3 SIEMENS BEABT
⚠	C999	C130774	Y CAP 1N SIEMENS BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518058	K9260M SAW DK/BG SOUND
	CP501	E518053	K3953M
	CRT BASE	A529140	28" PANASONIC CRT BASE
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D506	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
	D711	OPTION	NOT FITTED
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D732	T531055	DIODE BAT85 SCHOTTKY MULL
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G

	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D962	J2348921M	DIODE 1N4531
	D963	J2348921M	DIODE 1N4531
	D964	J2343962M	MPG06G
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	E006	E846903	2 WAY LEAD
	E1	E843243	CPT EARTH LEAD
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E304	OPTION	NOT FITTED
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E4500	E826157	QUAD PHONO SKT 86 SER
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
	E903	E826148	PHONO SKT BLACK S000043
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB450	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB451	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB452	E770091	EMI FILTER MURATA
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC450	T900724	YSS241-F/YSS241B-F
	IC453	T900765	DOLBY IC YSS909-M
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC953	T900695	L78M18CV (500mA)
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L4500	J2122943M	AXIAL COIL 10UH-J
	L4501	J2122943M	AXIAL COIL 10UH-J
	L4502	J2122943M	AXIAL COIL 10UH-J
	L4503	J2122943M	AXIAL COIL 10UH-J
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380115	LIN COIL LSLH13JW05SH
	L703	J2123781R	FILTER COIL EL101K
	L751	J2220641	E/W INJECTION COIL
	L752	L380147	&BRIDGE COIL
⚠	L901	L210068	M/FILTER 97192 RIFA BEAB

⚠	L902	L210068	M/FILTER 97192 RIFA BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED001	T547050	&SLR37VC3F LED ROHM
	PL006	J2902261	PLG-02P2R5VPWB
	PL007	J2902261	PLG-02P2R5VPWB
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q4503	W024001	0.56ML SFT TIN'D COP WIRE
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B
	Q508	J2315891R	TRS JC548B
	Q601	T636077	&IRFS530A ISOL SAMSUNG
	Q601B	J4520889	SCREW
	Q601D	J8821114	NUT 3
	Q701	T633137	TRANS BF459 MULLARD/SES
	Q703	J2315891R	TRS JC548B
	Q751	J2315451	TRS-BU2508AF
	Q751A	H235305	HEATSINK G7PS 3
	Q751B	G884027	SPRING CLIP
	Q901	T636077	&IRFS530A ISOL SAMSUNG
	Q902	J2315921R	TRS JC558B
	Q903	T636072	BUT12AF NON SELECTED
	Q903A	H235460	HEATSINK
	Q903B	G884027	SPRING CLIP
	Q903C	B976404	HEAT SINK COMPOUND 340
	Q905	T633133	TRANS BF422 BAND MULL/AEG
	Q906	J2315891R	TRS JC548B
	Q907	J2315891R	TRS JC548B
	Q908	J2315891R	TRS JC548B
	Q950	J2315891R	TRS JC548B
	Q951	T632084	BD438 TRANS'R MOTOROLA
	Q952	T631265	BC546B
	Q954	T633133	TRANS BF422 BAND MULL/AEG
	Q957	T636069	BD909 SGS NON-IS0
	Q957A	H234344	POWER HEATSINK G7PS3
	Q957B	G311331	M3 FULLNUT
	Q957C	B976404	HEAT SINK COMPOUND 340
	Q957D	F133310	M3X10MM POZI PAN M/C SCRW
	Q957E	G560331	M3 SPRING WASHER~TR FAST~
	Q959	J2315891R	TRS JC548B
	R001	J0700027M	100R 1/16W C/FILM 5%
	R002	J0700027M	100R 1/16W C/FILM 5%
	R003	J0700027M	100R 1/16W C/FILM 5%
	R004	J0700027M	100R 1/16W C/FILM 5%
	R005	J0700027M	100R 1/16W C/FILM 5%
	R006	J0195875R	RMC73S 2A101JR
	R008	J0195912R	RMC73S 2A332JR
	R010	E770091	EMI FILTER MURATA
	R011	E770091	EMI FILTER MURATA
	R012	J0700027M	100R 1/16W C/FILM 5%
	R013	J0700027M	100R 1/16W C/FILM 5%
	R015	J0700059M	27K 1/16W C/FILM 5%
	R016	J0700034M	330R 1/16W C/FILM 5%
	R017	J0187060M	RD14S1J621JB
	R019	J0700054M	10K 1/16W C/FILM 5%
	R020	J0700042M	1K2 1/16W C/FILM 5%
	R021	J0700045M	2K2 1/16W C/FILM 5%
	R023	J0700027M	100R 1/16W C/FILM 5%
	R024	J0700027M	100R 1/16W C/FILM 5%
	R025	J0700027M	100R 1/16W C/FILM 5%
	R026	J0700027M	100R 1/16W C/FILM 5%
	R028	J0195875R	RMC73S 2A101JR
	R029	J0195875R	RMC73S 2A101JR
	R030	J0195875R	RMC73S 2A101JR
	R031	J0700027M	100R 1/16W C/FILM 5%
	R032	J0700027M	100R 1/16W C/FILM 5%
	R033	J0700027M	100R 1/16W C/FILM 5%
	R034	J0700027M	100R 1/16W C/FILM 5%
	R037	J0700027M	100R 1/16W C/FILM 5%
	R038	J0700027M	100R 1/16W C/FILM 5%
	R039	J0700027M	100R 1/16W C/FILM 5%
	R044	E770091	EMI FILTER MURATA
	R045	E770091	EMI FILTER MURATA
	R046	E770091	EMI FILTER MURATA
	R047	E770091	EMI FILTER MURATA
	R048	E770091	EMI FILTER MURATA
	R049	J0195885R	RMC73S 2A271JR
	R050	J0195885R	RMC73S 2A271JR
	R051	J0195885R	RMC73S 2A271JR
	R052	J0195885R	RMC73S 2A271JR
	R053	J0195885R	RMC73S 2A271JR
	R054	J0195885R	RMC73S 2A271JR
	R055	J0195885R	RMC73S 2A271JR
	R056	J0195885R	RMC73S 2A271JR
	R057	J0195885R	RMC73S 2A271JR
	R058	J0195885R	RMC73S 2A271JR
	R059	J0195885R	RMC73S 2A271JR
	R065	R222330	220R 1/4W DRG NO
	R067	J0700054M	10K 1/16W C/FILM 5%
	R068	J0700054M	10K 1/16W C/FILM 5%
	R069	J0700054M	10K 1/16W C/FILM 5%
	R071	J0700054M	10K 1/16W C/FILM 5%
	R072	J0700054M	10K 1/16W C/FILM 5%
	R073	J0700049M	4K7 1/16W C/FILM 5%
	R074	J0700049M	4K7 1/16W C/FILM 5%
	R075	J0700027M	100R 1/16W C/FILM 5%
	R076	J0700027M	100R 1/16W C/FILM 5%
	R077	J0700027M	100R 1/16W C/FILM 5%
	R078	J0700027M	100R 1/16W C/FILM 5%
	R079	J0195875R	RMC73S 2A101JR
	R080	J0700027M	100R 1/16W C/FILM 5%
	R081	J0700027M	100R 1/16W C/FILM 5%
	R082	J0700054M	10K 1/16W C/FILM 5%
	R083	J0700027M	100R 1/16W C/FILM 5%
	R084	J0700027M	100R 1/16W C/FILM 5%
	R085	J0700027M	100R 1/16W C/FILM 5%
	R086	J0700027M	100R 1/16W C/FILM 5%
	R087	J0700054M	10K 1/16W C/FILM 5%
	R088	J0700054M	10K 1/16W C/FILM 5%
	R089	J0700049M	4K7 1/16W C/FILM 5%
	R090	J0700059M	27K 1/16W C/FILM 5%
	R091	J0700046M	2K7 1/16W C/FILM 5%
	R093	J0700054M	10K 1/16W C/FILM 5%
	R098	J0195925R	RMC73S 2A103JR
	R1	E770091	EMI FILTER MURATA
	R100	R247330	27K 1/4W DRG NO
	R102	R323330	330R 1/4W DRG NO
	R103	J0700027M	100R 1/16W C/FILM 5%
	R107	J0700054M	10K 1/16W C/FILM 5%
	R109	J0700059M	27K 1/16W C/FILM 5%

R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R214	J0187086M	RD14S1J752JB
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700044M	1K8 1/16W C/FILM 5%
R2700	R120330	100R 1/4W DRG NO
R3	J0195013R	RMC73 2B102JR
R30	J0195881R	RMC73S 2A181JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO
R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0700057M	18K 1/16W C/FILM 5%
R414	J0700057M	18K 1/16W C/FILM 5%
R415	J0700057M	18K 1/16W C/FILM 5%
R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R430	E770091	EMI FILTER MURATA
R431	J0195881R	RMC73S 2A181JR
R432	J0195881R	RMC73S 2A181JR
R433	J0195881R	RMC73S 2A181JR
R434	J0195881R	RMC73S 2A181JR
R435	J0195881R	RMC73S 2A181JR
R436	J0195881R	RMC73S 2A181JR
R437	J0195881R	RMC73S 2A181JR
R438	J0195881R	RMC73S 2A181JR
R440	E770091	EMI FILTER MURATA
R441	J0195881R	RMC73S 2A181JR
R449	J0700054M	10K 1/16W C/FILM 5%
R450	J0700027M	100R 1/16W C/FILM 5%
R4501	J0700027M	100R 1/16W C/FILM 5%
R4502	J0700027M	100R 1/16W C/FILM 5%
R4503	J0700027M	100R 1/16W C/FILM 5%
R4504	J0700027M	100R 1/16W C/FILM 5%
R4509	J0700067M	100K 1/16W C/FILM 5%
R451	J0700027M	100R 1/16W C/FILM 5%
R4510	J0195950R	RMC73S 2A104JR
R4511	J0195950R	RMC73S 2A104JR
R4512	J0195950R	RMC73S 2A104JR
R4540	J0195250R	RMC73S 000R
R4541	J0195250R	RMC73S 000R
R459	J0700054M	10K 1/16W C/FILM 5%
R464	J0700027M	100R 1/16W C/FILM 5%
R465	J0700027M	100R 1/16W C/FILM 5%
R466	J0700054M	10K 1/16W C/FILM 5%

R469	J0700027M	100R 1/16W C/FILM 5%
R470	J0700054M	10K 1/16W C/FILM 5%
R471	J0700054M	10K 1/16W C/FILM 5%
R472	J0700054M	10K 1/16W C/FILM 5%
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700032M	220R 1/16W C/FILM 5%
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%
R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R532	R128330	180R 1/4W DRG NO
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	J0700067M	100K 1/16W C/FILM 5%
R544	J0700069M	150K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700029M	150R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R
R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R100736	1R 1/4W 1% MFR4
R603	R202330	2R2 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
R623	J0113725M	100R RES CARBON FILM 1/2W
R701	J0140933S	RSL-472J7WS(BSR-Z)
R702	R120330	100R 1/4W DRG NO
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R145549	15K FF84~WELWYN~
R726	J0113778M	RD14S2H153JB
R732	R155330	150K 1/4W DRG NO
R733	R323330	330R 1/4W DRG NO
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147630	7W 6.8R WIRE WOUND ~PAN~
R752	R447330	47K 1/4W DRG NO
R759	R437330	4K7 1/4W DRG NO
R764	R658330	680K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0100101M	RD14S2B333JB
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%
R955	R457725	470K 1/16W MRS16T 1% M/F
R956	R132330	1K2 1/4W DRG NO
R957	J0700049M	4K7 1/16W C/FILM 5%
R958	J0700041M	1K 1/16W C/FILM 5%
R959	R145725	15K MRS16T 1% M/FILM
R960	J0700049M	4K7 1/16W C/FILM 5%
R961	R832725	8K2 MRS16T 1% M/FILM
R962	J0700067M	100K 1/16W C/FILM 5%
R963	R252725	220K 1/16W MRS16T 1% M/F
R964	R437725	4K7 MRS16T 1% M/FILM
R966	R437725	4K7 MRS16T 1% M/FILM
R967	R000708	11.5K MRS16T 1% 1/16W
R968	R140725	10K MRS16T 1% M/FILM
R969	R140725	10K MRS16T 1% M/FILM
R970	R141725	11K MRS16T 1% M/FILM
R971	J0700054M	10K 1/16W C/FILM 5%
R972	R000709	64.9K MRS16T 1% 1/16W
R973	R941725	91K MRS16T 1% M/FILM
R974	J0147516	RES 1R 5W 7APK
R975	J0147054AF	RW99J3D180KAF
R981	J0700046M	2K7 1/16W C/FILM 5%
R982	R130330	1K 1/4W DRG NO
R985	R427571	470R 2W 5% M02S F
R986	R526571	560R 2W 5% M02S F
R989	R407542	4R7 1W FF83 WELWYN
R991	J0700054M	10K 1/16W C/FILM 5%
R992	R628858	680R 4W VTM KP292 15mmP
R993	J0700041M	1K 1/16W C/FILM 5%
⚠ R999	R170727	10M 1W VR68 UL BEAB
⚠ RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
SW001	E139506	5 WAY TACT SWITCH
⚠ SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠ T701	J2436771	FBT-C87LLI ~BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠ T900	L380122	SMT-SLOT FAE42/15 BEABT
TH900	E441044	PTC TYPE 2322-662-96609

U201	E710060	& UE25-B57D UK (VA)
VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
W003	EC551505	1/0.7MM S000010
W012	EC520802	7/0.2MM S000029
W2700	W024001	0.56ML SFT TIN'D COP WIRE
W800	EC5A400A	7/0.2MM S000030
X001	E516030F	12MHz X'TAL NDK 5MM LEG
X400	E516056F	24.576MHZ CRYSTAL
X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
X502	J2791502	X'TAL 3.58MHZ NDK
Z901BU	J9451136	UL CSA TUBE N08
Z904	B912312	WHITE TAPE N069X12X33
Z905A	W470200	1MM 1/D SLEEVING BLACK
Z905B	W470200	1MM 1/D SLEEVING BLACK
ZC706U	B912312	WHITE TAPE N069X12X33
ZD001	T536179	BZX79C 6V2~PHILIPS~
ZD003	T536225	BZX79B 6V2 ~PHILIPS~
ZD200	T536215	BZX 79C 33V~PHILIPS~
ZD4000	T536177	BZX79C 12V~PHILIPS~
ZD4001	T536177	BZX79C 12V~PHILIPS~
ZD4002	T536171	BZX79C36V~PHILIPS~
ZD4003	T536171	BZX79C36V~PHILIPS~
ZD4004	T536171	BZX79C36V~PHILIPS~
ZD4006	T536215	BZX 79C 33V~PHILIPS~
ZD4500	T536177	BZX79C 12V~PHILIPS~
ZD4501	T536177	BZX79C 12V~PHILIPS~
ZD4502	T536177	BZX79C 12V~PHILIPS~
ZD4503	T536177	BZX79C 12V~PHILIPS~
ZD501	T536186	BZX79C 8V2~PHILIPS~
ZD502	T536186	BZX79C 8V2~PHILIPS~
ZD503	T536186	BZX79C 8V2~PHILIPS~
ZD504	T536284	BZX284-C9V1
ZD505	T536184	BZX79C 9V1~PHILIPS~
ZD506	T536184	BZX79C 9V1~PHILIPS~
ZD507	T536184	BZX79C 9V1~PHILIPS~
ZD508	T536280	BZX284-C6V2
ZD600	T536184	BZX79C 9V1~PHILIPS~
ZD602	T536174	BZX79C 5V1~PHILIPS~
ZD603	T536259	BZX79C56V
ZD610	T536237	BZX79B24V~PHILIPS~
ZD612	T536184	BZX79C 9V1~PHILIPS~
ZD700	T536236	BZX79B22V~PHILIPS~
ZD704	T536246	ZENER 18V 1.3W MULL
ZD705	T536215	BZX 79C 33V~PHILIPS~
ZD706	T536185	BZX79C 5V6~PHILIPS~
ZD717	J2339251M	HZS36-ILT
ZD902	T536246	ZENER 18V 1.3W MULL
ZD903	T536266	BZV85-C27V
ZD904	T536176	BZX 79C10V~PHILIPS~
ZD950	T536207	DIODE BZV10 REF MULLARD
ZD957	T536226	BZX79B6V8
ZD970	J2344122M	PGKE180AG23

A529130		**MAIN BOARD**	
	#5000	N936193	A7 CHASSIS FRAME NICAM
	#5001	JBM00041	FERRITE CORES BP53RB
	#5060	G863063	RIVET
	#701	J3333961	GROUNDING SPRING
	#7100	B912319	WHITE GLASS NO69X19X33
⚠	B001	PC50202	A7 MAIN PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299930F	CQ93E2D224KPF
	C2703	J0299931F	POLY CAP 270N 200V
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C432	C353883	GRM40Y5V334Z16PT
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT
	C518	J0800371F	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT
	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C532	OPTION	NOT FITTED
	C533	C506182	5.6PF 50V 2% DRG NO
	C537	J0893048R	CKM-223K500B-CNT2125
	C538	J0800086	2200u/10V ELEC
	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125
	C546	C150711	CAP 100N 36521104 100V POL
	C547	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C549	J0800326R	CEL-101M160WMFT
	C552	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C560	J0893035R	CKM--222K500B CNT2125
	C601	J0800337R	CEL-221M350WMFT
	C602	J0800337R	CEL-221M350WMFT
	C603	J0880194R	0.1UF 50V +-5% (100N)
	C604	J0880033R	CQM-152K500HFT
	C605	C457759	470N 63V POLY MMK5 RIFA/E

	C608	J0880062R	CQ93M1H224KEB
	C609	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C610	J0890092R	CAP CERAMIC 0.0022uF 50V
	C611	J0800337R	CEL-221M350WMFT
	C613	J0244505R	CER CAP 2n2-K 500V
	C614	J0244505R	CER CAP 2n2-K 500V
	C615	J0244505R	CER CAP 2n2-K 500V
	C701	J0243507R	CK45B2H331KB
	C702	J0257540F	ELEC CAP 4U7 250V
	C703	C142760	12N 1.6KV R/EVOX PHE428
	C704	JAJ00138	CC-222K202R-DF 2N2 2KV
	C705	J0299993F	CAP 18NF 5% 630V POLY
	C706U	C150711	CAP 100N 36521104 100V POL
	C707	JAJ00134	CK45-R3DD 102K-GR
	C708	J0245612F	CK45B3A472K
	C709	J0253952R	CEO4W2C1ROMP
	C710	J0253952R	CEO4W2C1ROMP
	C711	J0299932F	CQ93E2D334KPF
	C712	J0299929F	POLY CAP 180N 200V
	C713	J0299934F	CAP POLYPRO FILM 0.47UF
	C714	J0299934F	CAP POLYPRO FILM 0.47UF
	C715	J0243512R	CK45B2H821KB
	C716	C140707	CAP 10N 365-51103 MULARD
	C717	J0244213R	CKL-152K202R-DLT
	C719	J0253966F	CEO4W2D470N SME ECC
	C720	J0244503R	CK45B2H152KB
	C721	J0250511R	CAP POLY 0.022UF PHILIPS
	C724	J0800303R	ELECT CAP 22UF 50V SMG
	C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV
	C736	J0880048R	CQT223K50MB (PANASONIC)
	C737	C160708	1UF +-10% 250V 368-45105
	C744	J0880048R	CQT223K50MB (PANASONIC)
	C749	J0880033R	CQM-152K500HFT
	C760U	JAJ00138	CC-222K202R-DF 2N2 2KV
⚠	C901	C648751	68NF 20% X2 250V ~BEABT
⚠	C902	J0262774N	0.22UF 250VAC X2 ~BEABT
⚠	C903	C648751	68NF 20% X2 250V ~BEABT
⚠	C904	C648751	68NF 20% X2 250V ~BEABT
	C905	C001544	220uf 400V SMG 30x35MM
	C906	J0800326R	CEL-101M160WMFT
	C907	J0244501R	CER CAP 1000PF-K 500V
	C908	J0244501R	CER CAP 1000PF-K 500V
	C909	JAJ00127R	CK45-R3DD 331K
	C910	J0880044R	CAP POLYESTER 0.01UF K50V
	C911	J0800303R	ELECT CAP 22UF 50V SMG
	C912	J0890081R	CK45B1H331KB (MURATA)
	C913	J0800335R	CAP ELECT 220UF 16V SMG
	C914	J0800294R	ELECT CAP 10UF 50V SMG
	C915	J0800356F	CEO4W1H471M (SMG)
	C916	J0244501R	CER CAP 1000PF-K 500V
	C917	J0880033R	CQM-152K500HFT
	C918	J0800335R	CAP ELECT 220UF 16V SMG
	C919	J0244501R	CER CAP 1000PF-K 500V
	C922	J0890078R	CK45B1H221KB (MURATA)
	C923	J0880037R	CQM332K500HFT
	C924	J0880037R	CQM332K500HFT
	C925	J0890075R	CER CAP 120pf-J 50V SL
	C926	J0880194R	0.1UF 50V +-5% (100N)
	C926A	J0243509R	CERAMIC CAP 470p 500V
	C950	JAJ00129R	CK45-R3DD 471K
	C951	J0243509R	CERAMIC CAP 470p 500V
	C952	J0243509R	CERAMIC CAP 470p 500V
	C955	J0253935F	ELEC CAP 3300uF 35V 7.5
	C956	J0244505R	CER CAP 2n2-K 500V
	C957	J0800363F	CEO4W1F102M (SMG)
	C958	J0253492	CAP ELEC 150UF-M 200V
	C961	J0800279R	ELECT CAP 1.UF 50V
	C962	J0880033R	CQM-152K500HFT
	C963	J0800329R	ELECT CAP 100UF 50V SMG
	C964	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C967	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C970	J0800359F	CAP ELEC 1000uf-M SMG 10V
	C971	J0800294R	ELECT CAP 10UF 50V SMG
	C972	J0800329R	ELECT CAP 100UF 50V SMG
	C974	J0800353R	CAP ELECTRO 470UF 16V
	C976	J0880194R	0.1UF 50V +-5% (100N)
	C977	J0259431F	ELEC CAP 220UF 200V
	C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V
	C979	J0880053R	CQ93M1H473KEB(MF) N/PAN
⚠	C998	C333774	Y CAP 3N3 SIEMENS BEABT
⚠	C999	C130774	Y CAP 1N SIEMENS BEABT
	CLIP	N235034	HEATSINK CLIP
	CP202	E518058	K9260M SAW DK/BG SOUND
	CP501	E518053	K3953M
	CRT BASE	A529140	28" PANASONIC CRT BASE
	D001	J2348921M	DIODE 1N4531
	D002	J2348921M	DIODE 1N4531
	D003	J2348921M	DIODE 1N4531
	D004	J2348921M	DIODE 1N4531
	D020	T531055	DIODE BAT85 SCHOTTKY MULL
	D200	J2348921M	DIODE 1N4531
	D2700	T531053	DIODE IN4148 MULL/PHIL/ITT
	D300	T531068	DIODE MA723/TP PANASONIC
	D301	T531068	DIODE MA723/TP PANASONIC
	D302	T531068	DIODE MA723/TP PANASONIC
⚠	D504	T431113	DIODE BYD33J MULL BEAB
	D505	T531056	DIODE BYV10-40 ~MULLARD
	D506	T531056	DIODE BYV10-40 ~MULLARD
	D6	J2342834M	D10 BZX79B3V3
	D601	J2348921M	DIODE 1N4531
	D7	J2342834M	D10 BZX79B3V3
	D701	J2336612	RU3AM
⚠	D702	T431113	DIODE BYD33J MULL BEAB
	D703	J2343941M	RGP10G
	D704	H163007	BTC LINK 50MM(A/INSERTED)
	D706	T431117F	DIODE BY228 P/F PHILIPS
	D707	T531086F	BYW96E
	D708	J2348921M	DIODE 1N4531
	D709U	J2348921M	DIODE 1N4531
	D710	T431117F	DIODE BY228 P/F PHILIPS
⚠	D713	T431113	DIODE BYD33J MULL BEAB
⚠	D714	T431113	DIODE BYD33J MULL BEAB
⚠	D719	T431113	DIODE BYD33J MULL BEAB
	D732	T531055	DIODE BAT85 SCHOTTKY MULL
	D8	J2342834M	D10 BZX79B3V3
	D901	J2342711M	DIODE EM2A (SANKEN)
	D901BU	J2348921M	DIODE 1N4531
	D902	J2342711M	DIODE EM2A (SANKEN)
	D903	J2342711M	DIODE EM2A (SANKEN)
	D904	J2342711M	DIODE EM2A (SANKEN)
	D905	J2343962M	MPG06G
	D906	J2343962M	MPG06G
	D907	T531053	DIODE IN4148 MULL/PHIL/ITT
	D908	T531056	DIODE BYV10-40 ~MULLARD
	D909	T531053	DIODE IN4148 MULL/PHIL/ITT
	D910	J2343962M	MPG06G
⚠	D911	T431113	DIODE BYD33J MULL BEAB
	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G

	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D963	J2348921M	DIODE 1N4531
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB450	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC202	T900602	TDA9800 PHILIPS
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC501	T900767	TDA8843 V2
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J506	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L200	J2123781R	FILTER COIL EL101K
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L504	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380115	LIN COIL LSLH13JW05SH
	L703	J2123781R	FILTER COIL EL101K
	L751	J2220641	E/W INJECTION COIL
	L752	L380147	&BRIDGE COIL
⚠	L901	L210068	M/FILTER 97192 RIFA BEAB
⚠	L902	L210068	M/FILTER 97192 RIFA BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED001	T547050	&SLR37VC3F LED ROHM
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B
	Q005	J2315891R	TRS JC548B
	Q1	J2315891R	TRS JC548B
	Q204	J2315921R	TRS JC558B
	Q2700	T631304	BC547B TAPE
	Q300	J2315891R	TRS JC548B
	Q301	J2315891R	TRS JC548B
	Q302	J2315891R	TRS JC548B
	Q304	J2315891R	TRS JC548B
	Q4000	J2315891R	TRS JC548B
	Q500	J2315891R	TRS JC548B
	Q503	J2315891R	TRS JC548B
	Q505	J2315891R	TRS JC548B
	Q508	J2315891R	TRS JC548B
	Q601	T636077	&IRFS530A ISOL SAMSUNG
	Q601B	J4520889	SCREW
	Q601D	J8821114	NUT 3
	Q701	T633137	TRANS BF459 MULLARD/SES
	Q703	J2315891R	TRS JC548B
	Q751	J2315451	TRS-BU2508AF

Q751A	H235305	HEATSINK G7PS 3
Q751B	G884027	SPRING CLIP
Q901	T636077	&IRFS530A ISOL SAMSUNG
Q902	J2315921R	TRS JC558B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235460	HEATSINK
Q903B	G884027	SPRING CLIP
Q903C	B976404	HEAT SINK COMPOUND 340
Q905	T633133	TRANS BF422 BAND MULL/AEG
Q906	J2315891R	TRS JC548B
Q907	J2315891R	TRS JC548B
Q908	J2315891R	TRS JC548B
Q950	J2315891R	TRS JC548B
Q951	T632084	BD438 TRANS'R MOTOROLA
Q952	T631265	BC546B
Q954	T633133	TRANS BF422 BAND MULL/AEG
Q957	T636069	BD909 SGS NON-IS0
Q957A	H234344	POWER HEATSINK G7PS3
Q957B	G311331	M3 FULLNUT
Q957C	B976404	HEAT SINK COMPOUND 340
Q957D	F133310	M3X10MM POZI PAN M/C SCRW
Q957E	G560331	M3 SPRING WASHER~TR FAST~
Q959	J2315891R	TRS JC548B
R001	J0700027M	100R 1/16W C/FILM 5%
R002	J0700027M	100R 1/16W C/FILM 5%
R003	J0700027M	100R 1/16W C/FILM 5%
R004	J0700027M	100R 1/16W C/FILM 5%
R005	J0700027M	100R 1/16W C/FILM 5%
R006	J0195875R	RMC73S 2A101JR
R008	J0195912R	RMC73S 2A332JR
R010	E770091	EMI FILTER MURATA
R011	E770091	EMI FILTER MURATA
R012	J0700027M	100R 1/16W C/FILM 5%
R013	J0700027M	100R 1/16W C/FILM 5%
R015	J0700059M	27K 1/16W C/FILM 5%
R016	J0700034M	330R 1/16W C/FILM 5%
R017	J0187060M	RD14S1J621JB
R019	J0700054M	10K 1/16W C/FILM 5%
R020	J0700042M	1K2 1/16W C/FILM 5%
R021	J0700045M	2K2 1/16W C/FILM 5%
R023	J0700027M	100R 1/16W C/FILM 5%
R024	J0700027M	100R 1/16W C/FILM 5%
R025	J0700027M	100R 1/16W C/FILM 5%
R026	J0700027M	100R 1/16W C/FILM 5%
R028	J0195875R	RMC73S 2A101JR
R029	J0195875R	RMC73S 2A101JR
R030	J0195875R	RMC73S 2A101JR
R031	J0700027M	100R 1/16W C/FILM 5%
R032	J0700027M	100R 1/16W C/FILM 5%
R033	J0700027M	100R 1/16W C/FILM 5%
R034	J0700027M	100R 1/16W C/FILM 5%
R037	J0700027M	100R 1/16W C/FILM 5%
R038	J0700027M	100R 1/16W C/FILM 5%
R039	J0700027M	100R 1/16W C/FILM 5%
R044	E770091	EMI FILTER MURATA
R045	E770091	EMI FILTER MURATA
R046	E770091	EMI FILTER MURATA
R047	E770091	EMI FILTER MURATA
R048	E770091	EMI FILTER MURATA
R049	J0195885R	RMC73S 2A271JR
R050	J0195885R	RMC73S 2A271JR
R051	J0195885R	RMC73S 2A271JR
R052	J0195885R	RMC73S 2A271JR
R053	J0195885R	RMC73S 2A271JR
R054	J0195885R	RMC73S 2A271JR
R055	J0195885R	RMC73S 2A271JR
R056	J0195885R	RMC73S 2A271JR
R057	J0195885R	RMC73S 2A271JR
R058	J0195885R	RMC73S 2A271JR
R059	J0195885R	RMC73S 2A271JR
R065	R222330	220R 1/4W DRG NO
R067	J0700054M	10K 1/16W C/FILM 5%
R068	J0700054M	10K 1/16W C/FILM 5%
R069	J0700054M	10K 1/16W C/FILM 5%
R071	J0700054M	10K 1/16W C/FILM 5%
R072	J0700054M	10K 1/16W C/FILM 5%
R073	J0700049M	4K7 1/16W C/FILM 5%
R074	J0700049M	4K7 1/16W C/FILM 5%
R075	J0700027M	100R 1/16W C/FILM 5%
R076	J0700027M	100R 1/16W C/FILM 5%
R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%
R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R214	J0187086M	RD14S1J752JB
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%

	R228	J0700034M	330R 1/16W C/FILM 5%
	R230	J0700044M	1K8 1/16W C/FILM 5%
	R26	J0195250R	RMC73S 000R
	R27	J0195250R	RMC73S 000R
	R2700	R120330	100R 1/4W DRG NO
	R3	J0195013R	RMC73 2B102JR
	R300	R715330	75R 1/4W DRG NO
	R301	J0700054M	10K 1/16W C/FILM 5%
	R302	R715330	75R 1/4W DRG NO
	R303	J0700052M	6K8 1/16W C/FILM 5%
	R304	J0700054M	10K 1/16W C/FILM 5%
	R305	J0700067M	100K 1/16W C/FILM 5%
	R306	J0700036M	470R 1/16W C/FILM 5%
	R307	J0700036M	470R 1/16W C/FILM 5%
	R308	J0700067M	100K 1/16W C/FILM 5%
	R309	J0700054M	10K 1/16W C/FILM 5%
	R310	R120330	100R 1/4W DRG NO
	R311	R715330	75R 1/4W DRG NO
	R312	R715330	75R 1/4W DRG NO
	R313	R715330	75R 1/4W DRG NO
	R314	R120330	100R 1/4W DRG NO
	R315	R120330	100R 1/4W DRG NO
	R316	J0700052M	6K8 1/16W C/FILM 5%
	R317	J0700054M	10K 1/16W C/FILM 5%
	R318	R715330	75R 1/4W DRG NO
	R319	J0700067M	100K 1/16W C/FILM 5%
	R320	J0700036M	470R 1/16W C/FILM 5%
	R321	J0700036M	470R 1/16W C/FILM 5%
	R322	R715330	75R 1/4W DRG NO
	R323	J0700067M	100K 1/16W C/FILM 5%
	R324	J0700064M	56K 1/16W C/FILM 5%
	R325	J0700067M	100K 1/16W C/FILM 5%
	R326	J0700027M	100R 1/16W C/FILM 5%
	R327	J0700064M	56K 1/16W C/FILM 5%
	R328	J0700064M	56K 1/16W C/FILM 5%
	R329	J0700027M	100R 1/16W C/FILM 5%
	R330	J0700067M	100K 1/16W C/FILM 5%
	R331	J0700064M	56K 1/16W C/FILM 5%
	R334	R715330	75R 1/4W DRG NO
	R335	J0700027M	100R 1/16W C/FILM 5%
	R337	J0700038M	680R 1/16W C/FILM 5%
	R338	J0700058M	22K 1/16W C/FILM 5%
	R339	J0700027M	100R 1/16W C/FILM 5%
	R340	J0700054M	10K 1/16W C/FILM 5%
	R341	R110330	10R 1/4W DRG NO
	R349	J0700027M	100R 1/16W C/FILM 5%
	R350	J0700054M	10K 1/16W C/FILM 5%
	R351	J0700058M	22K 1/16W C/FILM 5%
	R352	J0700038M	680R 1/16W C/FILM 5%
	R4	J0195925R	RMC73S 2A103JR
	R400	J0700027M	100R 1/16W C/FILM 5%
	R4001	J0700054M	10K 1/16W C/FILM 5%
	R4002	J0700054M	10K 1/16W C/FILM 5%
	R4004	R132330	1K2 1/4W DRG NO
	R4005	R417330	47R 1/4W DRG NO
	R4006	R921330	910R 1/4W DRG NO
	R4007	R132330	1K2 1/4W DRG NO
⚠	R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
	R4009	R417330	47R 1/4W DRG NO
	R401	J0700027M	100R 1/16W C/FILM 5%
	R4010	J0700064M	56K 1/16W C/FILM 5%
⚠	R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
	R4014	R526330	560R 1/4W DRG NO
	R4015	R526330	560R 1/4W DRG NO
	R403	J0700054M	10K 1/16W C/FILM 5%
	R408	J0195250R	RMC73S 000R
	R410	J0700041M	1K 1/16W C/FILM 5%
	R411	J0700041M	1K 1/16W C/FILM 5%
	R412	J0700057M	18K 1/16W C/FILM 5%
	R413	J0700057M	18K 1/16W C/FILM 5%
	R414	J0700057M	18K 1/16W C/FILM 5%
	R415	J0700057M	18K 1/16W C/FILM 5%
	R416	J0195885R	RMC73S 2A271JR
	R417	J0195250R	RMC73S 000R
	R418	J0195931R	RMC73S 2A183JR
	R419	J0195931R	RMC73S 2A183JR
	R449	J0700054M	10K 1/16W C/FILM 5%
	R501	J0700035M	390R 1/16W C/FILM 5%
	R502	J0700041M	1K 1/16W C/FILM 5%
	R503	J0700027M	100R 1/16W C/FILM 5%
	R504	J0700027M	100R 1/16W C/FILM 5%
	R505	J0700032M	220R 1/16W C/FILM 5%
	R508	J0700041M	1K 1/16W C/FILM 5%
	R509U	J0700052M	6K8 1/16W C/FILM 5%
	R513	J0700041M	1K 1/16W C/FILM 5%
	R514	J0700027M	100R 1/16W C/FILM 5%
	R515	J0700027M	100R 1/16W C/FILM 5%
	R516	J0700027M	100R 1/16W C/FILM 5%
	R517	J0700052M	6K8 1/16W C/FILM 5%
	R523	J0700067M	100K 1/16W C/FILM 5%
	R524	R323330	330R 1/4W DRG NO
	R525	J0700058M	22K 1/16W C/FILM 5%
	R526	J0700058M	22K 1/16W C/FILM 5%
	R532	R128330	180R 1/4W DRG NO
	R534	J0700027M	100R 1/16W C/FILM 5%
	R536	R120330	100R 1/4W DRG NO
	R537	J0700059M	27K 1/16W C/FILM 5%
	R538	J0700063M	47K 1/16W C/FILM 5%
	R539	J0700056M	15K 1/16W C/FILM 5%
	R542	J0195941R	RMC73S 2A473JR
	R543	J0700067M	100K 1/16W C/FILM 5%
	R544	J0700069M	150K 1/16W C/FILM 5%
	R545	R349725	39K MRS16T 1% M/FILM
	R549	J0700029M	150R 1/16W C/FILM 5%
	R550	R110330	10R 1/4W DRG NO
	R551	J0187071M	RES 1K8 1/16W
	R552	J0700027M	100R 1/16W C/FILM 5%
	R560	J0195947R	RMC73S 2A823JR
	R570	J0195250R	RMC73S 000R
	R571	J0195250R	RMC73S 000R
	R600	R437330	4K7 1/4W DRG NO
	R601	R330330	3K 1/4W DRG NO
	R602	R100736	1R 1/4W 1% MFR4
	R603	R202330	2R2 1/4W DRG NO
	R610	R140330	10K 1/4W DRG NO
	R612	R447330	47K 1/4W DRG NO
	R614	J0113735M	RD14S2H271JB
	R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
	R623	J0113725M	100R RES CARBON FILM 1/2W
	R701	J0140933S	RSL-472J7WS(BSR-Z)
	R702	R120330	100R 1/4W DRG NO
	R704	J0700027M	100R 1/16W C/FILM 5%
	R706U	R100330	1R0 1/4W DRG NO
	R707	R437330	4K7 1/4W DRG NO
	R709	R319330	39R 1/4W DRG NO
	R714	J0113748M	RD14S2H821JB
	R715	R140570	10K 1W 5% MO1SL F
	R718	R254736	240K 1/4W M/F MFR4 1%
	R719	J0119647M	RN14S2B473FB
	R724	J0110273S	RSO8B3D153JS
	R725	R145549	15K FF84~WELWYN~
	R726	J0113778M	RD14S2H153JB
	R732	R155330	150K 1/4W DRG NO
	R733	R323330	330R 1/4W DRG NO
	R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
	R736	R638330	6K8 1/4W DRG NO
	R737	R232330	2K2 1/4W DRG NO
	R739	R822330	820R 1/4W DRG NO
	R740	R359725	390K 1/16W MRS16T 1% M/F
	R748	R130330	1K 1/4W DRG NO
	R749	R437736	4K7 MFR4 +/- 1% M/FILM
	R751	J0147630	7W 6.8R WIRE WOUND ~PAN~

	R752	R447330	47K 1/4W DRG NO
	R759	R437330	4K7 1/4W DRG NO
	R764	R658330	680K 1/4W DRG NO
	R766	R000621	&RES 1R 1OW VTM CER 5%
	R900	J0700034M	330R 1/16W C/FILM 5%
	R901	R242571	22K 2W M02S
	R902	R536736	5K6 MFR4 1%
	R903	J0147054AF	RW99J3D180KAF
	R904	R132859	KP292/1 1K2 3W VTM
	R905	R150736	100K 1/4W MFR4 1%
	R906	R333725	3K3 MRS16T 1% M/FILM
	R907	J0700067M	100K 1/16W C/FILM 5%
	R908	R148725	18K MRS16T 1% M/FILM
	R909	J0700058M	22K 1/16W C/FILM 5%
	R910	R000618	0.5R 2W WIRE WOUND 5%
	R911	J0700055M	12K 1/16W C/FILM 5%
	R912	R319330	39R 1/4W DRG NO
	R914	J0700041M	1K 1/16W C/FILM 5%
	R916	R546725	56K MRS16T 1% M/FILM
	R917	R145725	15K MRS16T 1% M/FILM
	R918	J0700042M	1K2 1/16W C/FILM 5%
	R919	J0700037M	560R 1/16W C/FILM 5%
	R920	R333330	3K3 1/4W DRG NO
	R922	J0700029M	150R 1/16W C/FILM 5%
	R924	J0700043M	1K5 1/16W C/FILM 5%
	R925	J0700056M	15K 1/16W C/FILM 5%
	R928	R343570	33K 1W 5% MO1S
	R930	R152725	120K 1/16W MRS16T 1% M/F
	R947	J0700066M	82K 1/16W C/FILM 5%
	R948	J0700041M	1K 1/16W C/FILM 5%
	R949	J0700046M	2K7 1/16W C/FILM 5%
	R950	R648570	68K 1W 5% MO1S F
	R950A	J0100101M	RD14S2B333JB
	R951	R142546	RES 12K 1W FA83 WELWYN
	R952	J0113772M	RD14S2H822JB
	R952A	J0700054M	10K 1/16W C/FILM 5%
	R953	J0700046M	2K7 1/16W C/FILM 5%
	R955	R457725	470K 1/16W MRS16T 1% M/F
	R956	R132330	1K2 1/4W DRG NO
	R957	J0700049M	4K7 1/16W C/FILM 5%
	R958	J0700041M	1K 1/16W C/FILM 5%
	R959	R145725	15K MRS16T 1% M/FILM
	R960	J0700049M	4K7 1/16W C/FILM 5%
	R961	R832725	8K2 MRS16T 1% M/FILM
	R962	J0700067M	100K 1/16W C/FILM 5%
	R963	R252725	220K 1/16W MRS16T 1% M/F
	R964	R437725	4K7 MRS16T 1% M/FILM
	R966	R437725	4K7 MRS16T 1% M/FILM
	R967	R000708	11.5K MRS16T 1% 1/16W
	R968	R140725	10K MRS16T 1% M/FILM
	R969	R140725	10K MRS16T 1% M/FILM
	R970	R141725	11K MRS16T 1% M/FILM
	R971	J0700054M	10K 1/16W C/FILM 5%
	R972	R000709	64.9K MRS16T 1% 1/16W
	R973	R941725	91K MRS16T 1% M/FILM
	R974	J0147516	RES 1R 5W 7APK
	R981	J0700046M	2K7 1/16W C/FILM 5%
	R982	R130330	1K 1/4W DRG NO
	R985	R427571	470R 2W 5% M02S F
	R986	R526571	560R 2W 5% M02S F
	R989	R407542	4R7 1W FF83 WELWYN
	R991	J0700054M	10K 1/16W C/FILM 5%
	R992	R628858	680R 4W VTM KP292 15mmP
	R993	J0700041M	1K 1/16W C/FILM 5%
⚠	R999	R170727	10M 1W VR68 UL BEAB
⚠	RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
	SW001	E139506	5 WAY TACT SWITCH
⚠	SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠	T701	J2436771	FBT-C87LLI ~BEABT
	T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠	T900	L380122	SMT-SLOT FAE42/15 BEABT
	TH900	E441044	PTC TYPE 2322-662-96609
	U201	E710060	& UE25-B57D UK (VA)
	VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
	VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
	W012	EC520802	7/0.2MM S000029
	W2700	W024001	0.56ML SFT TIN'D COP WIRE
	W800	EC5A400A	7/0.2MM S000030
	X001	E516030F	12MHz X'TAL NDK 5MM LEG
	X400	E516056F	24.576MHZ CRYSTAL
	X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
	X502	J2791502	X'TAL 3.58MHZ NDK
	Z901BU	J9451136	UL CSA TUBE N08
	Z904	B912312	WHITE TAPE N069X12X33
	Z905A	W470200	1MM 1/D SLEEVING BLACK
	Z905B	W470200	1MM 1/D SLEEVING BLACK
	ZC706U	B912312	WHITE TAPE N069X12X33
	ZD001	T536179	BZX79C 6V2~PHILIPS~
	ZD003	T536225	BZX79B 6V2 ~PHILIPS~
	ZD200	T536215	BZX 79C 33V~PHILIPS~
	ZD4000	T536177	BZX79C 12V~PHILIPS~
	ZD4001	T536177	BZX79C 12V~PHILIPS~
	ZD4002	T536171	BZX79C36V~PHILIPS~
	ZD4003	T536171	BZX79C36V~PHILIPS~
	ZD4004	T536171	BZX79C36V~PHILIPS~
	ZD4006	T536215	BZX 79C 33V~PHILIPS~
	ZD4500	T536177	BZX79C 12V~PHILIPS~
	ZD4501	T536177	BZX79C 12V~PHILIPS~
	ZD4502	T536177	BZX79C 12V~PHILIPS~
	ZD4503	T536177	BZX79C 12V~PHILIPS~
	ZD501	T536186	BZX79C 8V2~PHILIPS~
	ZD502	T536186	BZX79C 8V2~PHILIPS~
	ZD503	T536186	BZX79C 8V2~PHILIPS~
	ZD504	T536284	BZX284-C9V1
	ZD505	T536184	BZX79C 9V1~PHILIPS~
	ZD506	T536184	BZX79C 9V1~PHILIPS~
	ZD507	T536184	BZX79C 9V1~PHILIPS~
	ZD508	T536280	BZX284-C6V2
	ZD600	T536184	BZX79C 9V1~PHILIPS~
	ZD602	T536174	BZX79C 5V1~PHILIPS~
	ZD603	T536259	BZX79C56V
	ZD610	T536237	BZX79B24V~PHILIPS~
	ZD612	T536184	BZX79C 9V1~PHILIPS~
	ZD700	T536236	BZX79B22V~PHILIPS~
	ZD704	T536246	ZENER 18V 1.3W MULL
	ZD705	T536215	BZX 79C 33V~PHILIPS~
	ZD706	T536185	BZX79C 5V6~PHILIPS~
	ZD717	J2339251M	HZS36-ILT
	ZD902	T536246	ZENER 18V 1.3W MULL
	ZD903	T536266	BZV85-C27V
	ZD904	T536176	BZX 79C10V~PHILIPS~
	ZD950	T536207	DIODE BZV10 REF MULLARD
	ZD957	T536226	BZX79B6V8
	ZD970	J2344122M	PGKE180AG23

A527110 A7 CRT BASE

⚠	B801	E6547201	A7 32" CRT BASE BEAB
	C24	J0800292R	CAP ELECT 10UF 25V SMG
	C801	J0253975F	47UF 250V SME
	C802	J0890087R	CAP CERAMIC 1000pf-B 50V
	C805	J0246467R	CER CAP 130PF-J CH 50V
	C806	J0246467R	CER CAP 130PF-J CH 50V
	C807	J0246467R	CER CAP 130PF-J CH 50V
	C808	J0244215R	CK45R3D222K 2N2 CAP
	C813	J0800291R	CAP ELEC 10uF 16V SMG
	C814	J0800291R	CAP ELEC 10uF 16V SMG
	C815	J0890084R	CK45B1H561KB
	C816	J0890084R	CK45B1H561KB
	C817	J0890084R	CK45B1H561KB
	C840	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C841	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C842	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C843	J0800327R	ELECT CAP 100UF 25V SMG
	C844	J0880194R	0.1UF 50V +-5% (100N)
	C860	J0800327R	ELECT CAP 100UF 25V SMG
	C861	J0880194R	0.1UF 50V +-5% (100N)
	C864	J0880194R	0.1UF 50V +-5% (100N)
	C865	J0890116R	CCL-150J500CHDFT -D3
	C867	J0880194R	0.1UF 50V +-5% (100N)
	C868	J0880194R	0.1UF 50V +-5% (100N)
	C869	J0880194R	0.1UF 50V +-5% (100N)
	C870	C242711	22N 365 81223 POLY CAP
	C871	C242711	22N 365 81223 POLY CAP
	C872	C140711	10N 10% POLY CAPACITOR
	C873	C150711	CAP 100N 36521104 100V POL
	C874	C150711	CAP 100N 36521104 100V POL
⚠	C875	J0253973	ELEC 22UF 250V SMEVB BEAB
	C876	J0800279R	ELECT CAP 1.UF 50V
	C877	J0800279R	ELECT CAP 1.UF 50V
	C878	J0258124R	CAP ELECTRO 10UF 100V
	C879	J0258124R	CAP ELECTRO 10UF 100V
	C880	J0244215R	CK45R3D222K 2N2 CAP
	C881	J0890079R	CCL 271K500B DFT
	C882	J0890078R	CK45B1H221KB (MURATA)
	C883	J0890078R	CK45B1H221KB (MURATA)
⚠	D801	T431113	DIODE BYD33J MULL BEAB
	D853	J2343962M	MPG06G
	D854	J2343962M	MPG06G
	D861	J2348921M	DIODE 1N4531
	D862	J2348921M	DIODE 1N4531
	D864	J2348921M	DIODE 1N4531
	D865	J2348921M	DIODE 1N4531
	D866	J2348921M	DIODE 1N4531
	D867	J2348921M	DIODE 1N4531
	D869	J2348921M	DIODE 1N4531
⚠	E801	E822926	CPT SKT 0330770054 BEAB
	E806	E846837	3WAY V MOD LEAD
	FB850	J2123461M	FERRITE BEAD 0.8uH
	FB851	J2123461M	FERRITE BEAD 0.8uH
	FB852	J2123461M	FERRITE BEAD 0.8uH
	IC1	T900756	L78M15CV 5OOmA
	L2	J2123098M	LAL024R7KB
	L800	L300013	RL8010-820J-UL-HUK-B06
	L841	J2123098M	LAL024R7KB
	L842	J2123098M	LAL024R7KB
	L843	J2122253M	AXIAL COIL 100uH K TAPE
	L860	J0113727M	RD14S2H121JB
	PL800	E843241	CPT EARTH LEAD~GREENLIGHT
⚠	PL802	A525316	FOCUS & SCREEN LEAD BEAB
	PL803	J2902268	CP-09BP2R5V
	PL805	J2902266	PLG-07P2R5V PWB
	Q801	T633137	TRANS BF459 MULLARD/SES
	Q802	T633137	TRANS BF459 MULLARD/SES
	Q803	T633137	TRANS BF459 MULLARD/SES
	Q804	T633143	BF423L PHILIPS
	Q805	T633143	BF423L PHILIPS
	Q806	T633143	BF423L PHILIPS
	Q811	J2327773R	2SC3413 TRANSISTOR
	Q812	J2327773R	2SC3413 TRANSISTOR
	Q813	J2327773R	2SC3413 TRANSISTOR
	Q814	T633133	TRANS BF422 BAND MULL/AEG
	Q815	T633133	TRANS BF422 BAND MULL/AEG
	Q816	T633133	TRANS BF422 BAND MULL/AEG
	Q840	J2327773R	2SC3413 TRANSISTOR
	Q841	J2327773R	2SC3413 TRANSISTOR
	Q842	J2327773R	2SC3413 TRANSISTOR
	Q853	J2315391	TRS-2SC4793
	Q854	J2315381	TRS-2SA1837
	Q860	J2327773R	2SC3413 TRANSISTOR
	Q861	J2327773R	2SC3413 TRANSISTOR
	Q862	J2327773R	2SC3413 TRANSISTOR
	Q863	J2327753R	2SA1390 TRANSISTOR
	Q864	J2327753R	2SA1390 TRANSISTOR
	Q865	J2327753R	2SA1390 TRANSISTOR
	Q866	J2327773R	2SC3413 TRANSISTOR
	Q867	J2327773R	2SC3413 TRANSISTOR
	Q868	J2327753R	2SA1390 TRANSISTOR
	Q869	J2327753R	2SA1390 TRANSISTOR
	Q870	J2327783R	2SC3553 C/D TRANSISTOR
	R802	R130330	1K 1/4W DRG NO
	R803	R110330	10R 1/4W DRG NO
	R804	R242571	22K 2W M02S
	R804A	R447542	RES 47K 1W FF83
	R805	R242571	22K 2W M02S
	R805A	R447542	RES 47K 1W FF83
	R806	R242571	22K 2W M02S
	R806A	R447542	RES 47K 1W FF83
	R807	J0113744M	RD14S2H561JB
	R808	J0113744M	RD14S2H561JB
	R809	J0113744M	RD14S2H561JB
	R817	J0700024M	56R 1/16W C/FILM 5%
	R818	J0700024M	56R 1/16W C/FILM 5%
	R819	J0700024M	56R 1/16W C/FILM 5%
	R821	R329330	390R 1/4W DRG NO
	R822	R329330	390R 1/4W DRG NO
	R823	R329330	390R 1/4W DRG NO
	R840	J0700049M	4K7 1/16W C/FILM 5%
	R841	J0700049M	4K7 1/16W C/FILM 5%
	R842	J0700049M	4K7 1/16W C/FILM 5%
	R843	J0700037M	560R 1/16W C/FILM 5%
	R844	J0700037M	560R 1/16W C/FILM 5%
	R845	J0700041M	1K 1/16W C/FILM 5%
	R846	J0700031M	180R 1/16W C/FILM 5%
	R847	J0700037M	560R 1/16W C/FILM 5%
	R848	J0700037M	560R 1/16W C/FILM 5%
	R849	J0700041M	1K 1/16W C/FILM 5%
	R850	J0700031M	180R 1/16W C/FILM 5%
	R851	J0700037M	560R 1/16W C/FILM 5%
	R852	J0700037M	560R 1/16W C/FILM 5%
	R853	J0700041M	1K 1/16W C/FILM 5%

R854	J0700031M	180R 1/16W C/FILM 5%
R860	J0700027M	100R 1/16W C/FILM 5%
R861	R222330	220R 1/4W DRG NO
R862	J0700046M	2K7 1/16W C/FILM 5%
R863	J0700033M	270R 1/16W C/FILM 5%
R864	J0700057M	18K 1/16W C/FILM 5%
R865	J0700045M	2K2 1/16W C/FILM 5%
R867	J0700034M	330R 1/16W C/FILM 5%
R868	J0700039M	820R 1/16W C/FILM 5%
R869	J0700037M	560R 1/16W C/FILM 5%
R870	J0700037M	560R 1/16W C/FILM 5%
R871	R222330	220R 1/4W DRG NO
R872	J0700018M	22R 1/16W C/FILM 5%
R873	J0700018M	22R 1/16W C/FILM 5%
R874	J0700038M	680R 1/16W C/FILM 5%
R875	J0700047M	3K3 1/16W C/FILM 5%
R876	J0700042M	1K2 1/16W C/FILM 5%
R877	J0700049M	4K7 1/16W C/FILM 5%
R878	J0700041M	1K 1/16W C/FILM 5%
R879	J0700055M	12K 1/16W C/FILM 5%
R880	R135330	1K5 1/4W DRG NO
R881	R152330	120K 1/4W DRG NO
R882	R152330	120K 1/4W DRG NO
R883	R135330	1K5 1/4W DRG NO
R884	J0113719M	RD14S2H560JB
R885	J0113719M	RD14S2H560JB
R886	R323570	330R 1W 5% MO1S F
R887	R148330	18K 1/4W DRG NO
R888	R155330	150K 1/4W DRG NO
R889	R148330	18K 1/4W DRG NO
R892	J0700043M	1K5 1/16W C/FILM 5%
R893	J0700038M	680R 1/16W C/FILM 5%
R894	J0700038M	680R 1/16W C/FILM 5%
R896	R132330	1K2 1/4W DRG NO
R897	R132330	1K2 1/4W DRG NO
R898	R132330	1K2 1/4W DRG NO
R8A1	R822330	820R 1/4W DRG NO
R8A2	R822330	820R 1/4W DRG NO
R8A3	R822330	820R 1/4W DRG NO
SG800	J2340039	SPARK GAP - FORMED
ZD805	J2342828M	BZX79C27

	A527250		CRT BASE ASSY
⚠	B801	E6547201	A7 32" CRT BASE BEAB
	C24	J0800292R	CAP ELECT 10UF 25V SMG
	C801	J0253975F	47UF 250V SME
	C802	J0890087R	CAP CERAMIC 1000pf-B 50V
	C805	J0246467R	CER CAP 130PF-J CH 50V
	C806	J0246467R	CER CAP 130PF-J CH 50V
	C807	J0246467R	CER CAP 130PF-J CH 50V
	C808	J0244211R	CK45B53D102K
	C813	J0800291R	CAP ELEC 10uF 16V SMG
	C814	J0800291R	CAP ELEC 10uF 16V SMG
	C815	J0890084R	CK45B1H561KB
	C816	J0890084R	CK45B1H561KB
	C817	J0890084R	CK45B1H561KB
	C840	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C841	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C842	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C843	J0800327R	ELECT CAP 100UF 25V SMG
	C844	J0880194R	0.1UF 50V +-5% (100N)
	C860	J0800327R	ELECT CAP 100UF 25V SMG
	C861	J0880194R	0.1UF 50V +-5% (100N)
	C864	J0880194R	0.1UF 50V +-5% (100N)
	C865	J0890116R	CCL-150J500CHDFT -D3
	C867	J0880194R	0.1UF 50V +-5% (100N)
	C868	J0880194R	0.1UF 50V +-5% (100N)
	C869	J0880194R	0.1UF 50V +-5% (100N)
	C870	C242711	22N 365 81223 POLY CAP
	C871	C242711	22N 365 81223 POLY CAP
	C872	C140711	10N 10% POLY CAPACITOR
	C873	C150711	CAP 100N 36521104 100V POL
	C874	C150711	CAP 100N 36521104 100V POL
⚠	C875	J0253973	ELEC 22UF 250V SMEVB BEAB
	C876	J0800279R	ELECT CAP 1.UF 50V
	C877	J0800279R	ELECT CAP 1.UF 50V
	C878	J0258124R	CAP ELECTRO 10UF 100V
	C879	J0258124R	CAP ELECTRO 10UF 100V
	C881	J0890081R	CK45B1H331KB (MURATA)
	C882	J0890078R	CK45B1H221KB (MURATA)
	C883	J0890078R	CK45B1H221KB (MURATA)
⚠	D801	T431113	DIODE BYD33J MULL BEAB
	D853	J2343962M	MPG06G
	D854	J2343962M	MPG06G
	D861	J2348921M	DIODE 1N4531
	D862	J2348921M	DIODE 1N4531
	D864	J2348921M	DIODE 1N4531
	D865	J2348921M	DIODE 1N4531
	D866	J2348921M	DIODE 1N4531
	D867	J2348921M	DIODE 1N4531
	D869	J2348921M	DIODE 1N4531
⚠	E801	E822924	CPT SKT 4545/S7 ~BEAB~
	E806	J2902263	PLG-04P2R5VPWB
	FB850	J2123461M	FERRITE BEAD 0.8uH
	FB851	J2123461M	FERRITE BEAD 0.8uH
	FB852	J2123461M	FERRITE BEAD 0.8uH
	IC1	T900756	L78M15CV 5OOmA
	L2	J2123098M	LAL024R7KB
	L800	L300012	*RL8010-680J-UL-HUL-BO6
	L841	J2123098M	LAL024R7KB
	L842	J2123098M	LAL024R7KB
	L843	J2122253M	AXIAL COIL 100uH K TAPE
	L860	J0113727M	RD14S2H121JB
	PL800	E843241	CPT EARTH LEAD~GREENLIGHT
	PL803	J2902268	CP-09BP2R5V
	PL805	J2902266	PLG-07P2R5V PWB
	Q801	T633137	TRANS BF459 MULLARD/SES
	Q802	T633137	TRANS BF459 MULLARD/SES
	Q803	T633137	TRANS BF459 MULLARD/SES
	Q804	T633143	BF423L PHILIPS
	Q805	T633143	BF423L PHILIPS
	Q806	T633143	BF423L PHILIPS
	Q811	J2327773R	2SC3413 TRANSISTOR
	Q812	J2327773R	2SC3413 TRANSISTOR
	Q813	J2327773R	2SC3413 TRANSISTOR
	Q814	T633133	TRANS BF422 BAND MULL/AEG
	Q815	T633133	TRANS BF422 BAND MULL/AEG
	Q816	T633133	TRANS BF422 BAND MULL/AEG
	Q840	J2327773R	2SC3413 TRANSISTOR
	Q841	J2327773R	2SC3413 TRANSISTOR
	Q842	J2327773R	2SC3413 TRANSISTOR
	Q853	J2315391	TRS-2SC4793
	Q854	J2315381	TRS-2SA1837
	Q860	J2327773R	2SC3413 TRANSISTOR
	Q861	J2327773R	2SC3413 TRANSISTOR
	Q862	J2327773R	2SC3413 TRANSISTOR
	Q863	J2327753R	2SA1390 TRANSISTOR
	Q864	J2327753R	2SA1390 TRANSISTOR
	Q865	J2327753R	2SA1390 TRANSISTOR
	Q866	J2327773R	2SC3413 TRANSISTOR
	Q867	J2327773R	2SC3413 TRANSISTOR
	Q868	J2327753R	2SA1390 TRANSISTOR
	Q869	J2327753R	2SA1390 TRANSISTOR
	Q870	J2327783R	2SC3553 C/D TRANSISTOR
	R802	R130330	1K 1/4W DRG NO
	R803	R110330	10R 1/4W DRG NO
	R804	R145571	15K 2W 5% MO2S F
	R805	R145571	15K 2W 5% MO2S F
	R806	R145571	15K 2W 5% MO2S F
	R807	J0113744M	RD14S2H561JB
	R808	J0113744M	RD14S2H561JB
	R809	J0113744M	RD14S2H561JB
	R817	J0700024M	56R 1/16W C/FILM 5%
	R818	J0700024M	56R 1/16W C/FILM 5%
	R819	J0700024M	56R 1/16W C/FILM 5%
	R821	R329330	390R 1/4W DRG NO
	R822	R329330	390R 1/4W DRG NO
	R823	R329330	390R 1/4W DRG NO
	R840	J0700049M	4K7 1/16W C/FILM 5%
	R841	J0700049M	4K7 1/16W C/FILM 5%
	R842	J0700049M	4K7 1/16W C/FILM 5%
	R843	J0700037M	560R 1/16W C/FILM 5%
	R844	J0700037M	560R 1/16W C/FILM 5%
	R845	J0700041M	1K 1/16W C/FILM 5%
	R846	J0700031M	180R 1/16W C/FILM 5%
	R847	J0700037M	560R 1/16W C/FILM 5%
	R848	J0700037M	560R 1/16W C/FILM 5%
	R849	J0700041M	1K 1/16W C/FILM 5%
	R850	J0700031M	180R 1/16W C/FILM 5%
	R851	J0700037M	560R 1/16W C/FILM 5%
	R852	J0700037M	560R 1/16W C/FILM 5%
	R853	J0700041M	1K 1/16W C/FILM 5%
	R854	J0700031M	180R 1/16W C/FILM 5%
	R860	J0700027M	100R 1/16W C/FILM 5%
	R861	R222330	220R 1/4W DRG NO
	R862	J0700046M	2K7 1/16W C/FILM 5%
	R863	J0700033M	270R 1/16W C/FILM 5%
	R864	J0700057M	18K 1/16W C/FILM 5%
	R865	J0700045M	2K2 1/16W C/FILM 5%
	R867	J0700034M	330R 1/16W C/FILM 5%
	R868	J0700039M	820R 1/16W C/FILM 5%

R869	J0700037M	560R 1/16W C/FILM 5%
R870	J0700037M	560R 1/16W C/FILM 5%
R871	R222330	220R 1/4W DRG NO
R872	J0700018M	22R 1/16W C/FILM 5%
R873	J0700018M	22R 1/16W C/FILM 5%
R874	J0700038M	680R 1/16W C/FILM 5%
R875	J0700047M	3K3 1/16W C/FILM 5%
R876	J0700042M	1K2 1/16W C/FILM 5%
R877	J0700049M	4K7 1/16W C/FILM 5%
R878	J0700041M	1K 1/16W C/FILM 5%
R879	J0700055M	12K 1/16W C/FILM 5%
R880	R135330	1K5 1/4W DRG NO
R881	R152330	120K 1/4W DRG NO
R882	R152330	120K 1/4W DRG NO
R883	R135330	1K5 1/4W DRG NO
R884	J0113719M	RD14S2H560JB
R885	J0113719M	RD14S2H560JB
R886	R323570	330R 1W 5% MO1S F
R887	R148330	18K 1/4W DRG NO
R888	R155330	150K 1/4W DRG NO
R889	R148330	18K 1/4W DRG NO
R892	J0700043M	1K5 1/16W C/FILM 5%
R893	J0700038M	680R 1/16W C/FILM 5%
R894	J0700038M	680R 1/16W C/FILM 5%
R896	R132330	1K2 1/4W DRG NO
R897	R132330	1K2 1/4W DRG NO
R898	R132330	1K2 1/4W DRG NO
R8A1	R822330	820R 1/4W DRG NO
R8A2	R822330	820R 1/4W DRG NO
R8A3	R822330	820R 1/4W DRG NO
SG800	J2340039	SPARK GAP - FORMED
ZD805	J2342828M	BZX79C27

A529140 **A7 CRT BASE**

⚠	B801	E6547201	A7 32" CRT BASE BEAB
	C24	J0800292R	CAP ELECT 10UF 25V SMG
	C801	J0253975F	47UF 250V SME
	C802	J0890087R	CAP CERAMIC 1000pf-B 50V
	C805	J0246467R	CER CAP 130PF-J CH 50V
	C806	J0246467R	CER CAP 130PF-J CH 50V
	C807	J0246467R	CER CAP 130PF-J CH 50V
	C808	J0244211R	CK45B53D102K
	C813	J0800291R	CAP ELEC 10uF 16V SMG
	C814	J0800291R	CAP ELEC 10uF 16V SMG
	C815	J0890084R	CK45B1H561KB
	C816	J0890084R	CK45B1H561KB
	C817	J0890084R	CK45B1H561KB
	C840	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C841	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C842	J0890071R	CAP CERAMIC 56pf-J 50V SL
	C843	J0800327R	ELECT CAP 100UF 25V SMG
	C844	J0880194R	0.1UF 50V +-5% (100N)
	C860	J0800327R	ELECT CAP 100UF 25V SMG
	C861	J0880194R	0.1UF 50V +-5% (100N)
	C864	J0880194R	0.1UF 50V +-5% (100N)
	C865	J0890116R	CCL-150J500CHDFT -D3
	C867	J0880194R	0.1UF 50V +-5% (100N)
	C868	J0880194R	0.1UF 50V +-5% (100N)
	C869	J0880194R	0.1UF 50V +-5% (100N)
	C870	C242711	22N 365 81223 POLY CAP
	C871	C242711	22N 365 81223 POLY CAP
	C872	C140711	10N 10% POLY CAPACITOR
	C873	C150711	CAP 100N 36521104 100V POL
	C874	C150711	CAP 100N 36521104 100V POL
⚠	C875	J0253973	ELEC 22UF 250V SMEVB BEAB
	C876	J0800279R	ELECT CAP 1.UF 50V
	C877	J0800279R	ELECT CAP 1.UF 50V
	C878	J0258124R	CAP ELECTRO 10UF 100V
	C879	J0258124R	CAP ELECTRO 10UF 100V
	C881	J0890081R	CK45B1H331KB (MURATA)
	C882	J0890078R	CK45B1H221KB (MURATA)
	C883	J0890078R	CK45B1H221KB (MURATA)
⚠	D801	T431113	DIODE BYD33J MULL BEAB
	D853	J2343962M	MPG06G
	D854	J2343962M	MPG06G
	D861	J2348921M	DIODE 1N4531
	D862	J2348921M	DIODE 1N4531
	D864	J2348921M	DIODE 1N4531
	D865	J2348921M	DIODE 1N4531
	D866	J2348921M	DIODE 1N4531
	D867	J2348921M	DIODE 1N4531
	D869	J2348921M	DIODE 1N4531
⚠	E801	E822924	CPT SKT 4545/S7 ~BEAB~
	E806	J2902263	PLG-04P2R5VPWB
	FB850	J2123461M	FERRITE BEAD 0.8uH
	FB851	J2123461M	FERRITE BEAD 0.8uH
	FB852	J2123461M	FERRITE BEAD 0.8uH
	IC1	T900756	L78M15CV 5OOmA
	L2	J2123098M	LAL024R7KB
	L800	L300012	*RL8010-680J-UL-HUL-BO6
	L841	J2123098M	LAL024R7KB
	L842	J2123098M	LAL024R7KB
	L843	J2122253M	AXIAL COIL 100uH K TAPE
	L860	J0113727M	RD14S2H121JB
	PL800	E843241	CPT EARTH LEAD~GREENLIGHT
	PL803	J2902268	CP-09BP2R5V
	PL805	J2902266	PLG-07P2R5V PWB
	Q801	T633137	TRANS BF459 MULLARD/SES
	Q802	T633137	TRANS BF459 MULLARD/SES
	Q803	T633137	TRANS BF459 MULLARD/SES
	Q804	T633143	BF423L PHILIPS
	Q805	T633143	BF423L PHILIPS
	Q806	T633143	BF423L PHILIPS
	Q811	J2327773R	2SC3413 TRANSISTOR
	Q812	J2327773R	2SC3413 TRANSISTOR
	Q813	J2327773R	2SC3413 TRANSISTOR
	Q814	T633133	TRANS BF422 BAND MULL/AEG
	Q815	T633133	TRANS BF422 BAND MULL/AEG
	Q816	T633133	TRANS BF422 BAND MULL/AEG
	Q840	J2327773R	2SC3413 TRANSISTOR
	Q841	J2327773R	2SC3413 TRANSISTOR
	Q842	J2327773R	2SC3413 TRANSISTOR
	Q853	J2315391	TRS-2SC4793
	Q854	J2315381	TRS-2SA1837
	Q860	J2327773R	2SC3413 TRANSISTOR
	Q861	J2327773R	2SC3413 TRANSISTOR
	Q862	J2327773R	2SC3413 TRANSISTOR
	Q863	J2327753R	2SA1390 TRANSISTOR
	Q864	J2327753R	2SA1390 TRANSISTOR
	Q865	J2327753R	2SA1390 TRANSISTOR
	Q866	J2327773R	2SC3413 TRANSISTOR
	Q867	J2327773R	2SC3413 TRANSISTOR
	Q868	J2327753R	2SA1390 TRANSISTOR
	Q869	J2327753R	2SA1390 TRANSISTOR
	Q870	J2327783R	2SC3553 C/D TRANSISTOR
	R802	R130330	1K 1/4W DRG NO
	R803	R110330	10R 1/4W DRG NO
	R804	R145571	15K 2W 5% MO2S F
	R805	R145571	15K 2W 5% MO2S F
	R806	R145571	15K 2W 5% MO2S F
	R807	J0113744M	RD14S2H561JB
	R808	J0113744M	RD14S2H561JB
	R809	J0113744M	RD14S2H561JB
	R817	J0700024M	56R 1/16W C/FILM 5%
	R818	J0700024M	56R 1/16W C/FILM 5%
	R819	J0700024M	56R 1/16W C/FILM 5%
	R821	R329330	390R 1/4W DRG NO
	R822	R329330	390R 1/4W DRG NO
	R823	R329330	390R 1/4W DRG NO
	R840	J0700049M	4K7 1/16W C/FILM 5%
	R841	J0700049M	4K7 1/16W C/FILM 5%
	R842	J0700049M	4K7 1/16W C/FILM 5%
	R843	J0700037M	560R 1/16W C/FILM 5%
	R844	J0700037M	560R 1/16W C/FILM 5%
	R845	J0700041M	1K 1/16W C/FILM 5%
	R846	J0700031M	180R 1/16W C/FILM 5%
	R847	J0700037M	560R 1/16W C/FILM 5%
	R848	J0700037M	560R 1/16W C/FILM 5%
	R849	J0700041M	1K 1/16W C/FILM 5%
	R850	J0700031M	180R 1/16W C/FILM 5%
	R851	J0700037M	560R 1/16W C/FILM 5%
	R852	J0700037M	560R 1/16W C/FILM 5%
	R853	J0700041M	1K 1/16W C/FILM 5%
	R854	J0700031M	180R 1/16W C/FILM 5%
	R860	J0700027M	100R 1/16W C/FILM 5%
	R861	R222330	220R 1/4W DRG NO
	R862	J0700046M	2K7 1/16W C/FILM 5%
	R863	J0700033M	270R 1/16W C/FILM 5%
	R864	J0700057M	18K 1/16W C/FILM 5%
	R865	J0700045M	2K2 1/16W C/FILM 5%
	R867	J0700034M	330R 1/16W C/FILM 5%
	R868	J0700039M	820R 1/16W C/FILM 5%
	R869	J0700037M	560R 1/16W C/FILM 5%
	R870	J0700037M	560R 1/16W C/FILM 5%
	R871	R222330	220R 1/4W DRG NO
	R872	J0700018M	22R 1/16W C/FILM 5%
	R873	J0700018M	22R 1/16W C/FILM 5%
	R874	J0700038M	680R 1/16W C/FILM 5%

R875	J0700047M	3K3 1/16W C/FILM 5%
R876	J0700042M	1K2 1/16W C/FILM 5%
R877	J0700049M	4K7 1/16W C/FILM 5%
R878	J0700041M	1K 1/16W C/FILM 5%
R879	J0700055M	12K 1/16W C/FILM 5%
R880	R135330	1K5 1/4W DRG NO
R881	R152330	120K 1/4W DRG NO
R882	R152330	120K 1/4W DRG NO
R883	R135330	1K5 1/4W DRG NO
R884	J0113719M	RD14S2H560JB
R885	J0113719M	RD14S2H560JB
R886	R323570	330R 1W 5% MO1S F
R887	R148330	18K 1/4W DRG NO
R888	R155330	150K 1/4W DRG NO
R889	R148330	18K 1/4W DRG NO
R892	J0700043M	1K5 1/16W C/FILM 5%
R893	J0700038M	680R 1/16W C/FILM 5%
R894	J0700038M	680R 1/16W C/FILM 5%
R896	R132330	1K2 1/4W DRG NO
R897	R132330	1K2 1/4W DRG NO
R898	R132330	1K2 1/4W DRG NO
R8A1	R822330	820R 1/4W DRG NO
R8A2	R822330	820R 1/4W DRG NO
R8A3	R822330	820R 1/4W DRG NO
SG800	J2340039	SPARK GAP - FORMED
ZD805	J2342828M	BZX79C27

	A528700	N936193	A7 CHASSIS FRAME NICAM
	#5001	JBM00041	FERRITE CORES BP53RB
	#5060	G863063	RIVET
	#701	J3333961	GROUNDING SPRING
	#7100	B912319	WHITE GLASS NO69X19X33
⚠	B001	PC50202	A7 MAIN PCB BEAB
	C001	J0880194R	0.1UF 50V +-5% (100N)
	C002	J0890083R	CK45 B1H471KB
	C003	J0893027R	CKM-104K250B-CNT2125
	C004	J0800326R	CEL-101M160WMFT
	C009	J0880194R	0.1UF 50V +-5% (100N)
	C010	J0880194R	0.1UF 50V +-5% (100N)
	C011	J0893027R	CKM-104K250B-CNT2125
	C012	J0228042R	CC73SCH1H330JR
	C013	J0228042R	CC73SCH1H330JR
	C014	J0800333R	CEL 221M6R3WMFT
	C016	J0880194R	0.1UF 50V +-5% (100N)
	C017	J0880194R	0.1UF 50V +-5% (100N)
	C018	J0880194R	0.1UF 50V +-5% (100N)
	C020	J0890064R	CER CAP 18PF 50V
	C021	J0800326R	CEL-101M160WMFT
	C022	J0800326R	CEL-101M160WMFT
	C023	J0800326R	CEL-101M160WMFT
	C025	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C2	J0880194R	0.1UF 50V +-5% (100N)
	C200	J0800317R	CP ELECTRO 47UF SMG 16
	C201	C140759	10N 63V POLY MMK5 R/EVOX
	C202	J0880044R	CAP POLYESTER 0.01UF K50V
	C203	J0800324R	C/ELEC 100UF M SMG 6.3V
	C204	J0880194R	0.1UF 50V +-5% (100N)
	C205	J0880194R	0.1UF 50V +-5% (100N)
	C206	J0880044R	CAP POLYESTER 0.01UF K50V
	C207	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C209	J0890118R	CCL-220J500CHDFT -D3
	C210	J0880194R	0.1UF 50V +-5% (100N)
	C211	J0800299R	CAP ELECTRO 22UF 16V
	C212	J0880194R	0.1UF 50V +-5% (100N)
	C213	J0800288R	CAP ELECTRO 4.7UF-M 50V
	C214	J0800294R	ELECT CAP 10UF 50V SMG
	C215	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C216	J0880044R	CAP POLYESTER 0.01UF K50V
	C216A	J0228058R	CC73SCH1H151JR 150PF
	C217	J0880194R	0.1UF 50V +-5% (100N)
	C218	J0880194R	0.1UF 50V +-5% (100N)
	C220	C802182	8.2PF 50V 2% DRG NO
	C221	J0800282R	CAP ELECTRO 2.2UF-M 50V
	C222	J0800294R	ELECT CAP 10UF 50V SMG
	C223	J0880044R	CAP POLYESTER 0.01UF K50V
	C224	J0880048R	CQT223K50MB (PANASONIC)
	C227U	J0890123R	CC45CH1H470JB ~MURATA~
	C228	J0890123R	CC45CH1H470JB ~MURATA~
	C2700	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C2702	J0299930F	CQ93E2D224KPF
	C2703	J0299931F	POLY CAP 270N 200V
	C300	J0800352R	ELEC CAP 470UF 10V SMG
	C301	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C302	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C303	J0800294R	ELECT CAP 10UF 50V SMG
	C304	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C305	J0800294R	ELECT CAP 10UF 50V SMG
	C306	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C308U	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C309	J0800294R	ELECT CAP 10UF 50V SMG
	C310	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C311U	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C312	J0800294R	ELECT CAP 10UF 50V SMG
	C313	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C314	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C315	J0800294R	ELECT CAP 10UF 50V SMG
	C316	J0800294R	ELECT CAP 10UF 50V SMG
	C317	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C319	J0800352R	ELEC CAP 470UF 10V SMG
	C320	J0800291R	CAP ELEC 10uF 16V SMG
	C322	J0800291R	CAP ELEC 10uF 16V SMG
	C400	J0880194R	0.1UF 50V +-5% (100N)
	C4000	J0880062R	CQ93M1H224KEB
	C4001	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4002	J0880035R	CQ93M1H222KEB (MF) N/PAN
	C4003	J0880062R	CQ93M1H224KEB
	C4004	J0800363F	CEO4W1F102M (SMG)
	C4005	J0800321R	ELECT CAP 47UF 50V SMG
	C4006	J0800321R	ELECT CAP 47UF 50V SMG
	C4007	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4008	J0880194R	0.1UF 50V +-5% (100N)
	C4009	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C401	J0800324R	C/ELEC 100UF M SMG 6.3V
	C4010	J0880194R	0.1UF 50V +-5% (100N)
	C4011	J0800361F	CAP ELEC 1000UF-M SMG 16V
	C4012	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C4015	J0800321R	ELECT CAP 47UF 50V SMG
	C402	C353883	GRM40Y5V334Z16PT
	C403	J0880194R	0.1UF 50V +-5% (100N)
	C404	J0890074R	CAP CERAMIC 100pf-J 50VSL
	C405	J0800321R	ELECT CAP 47UF 50V SMG
	C406	J0800279R	ELECT CAP 1.UF 50V
	C407	J0195250R	RMC73S 000R
	C408	C506881	GRM40COG5R6D50-500
	C409	C506881	GRM40COG5R6D50-500
	C411	C457759	470N 63V POLY MMK5 RIFA/E
	C412	C457759	470N 63V POLY MMK5 RIFA/E
	C413	C457759	470N 63V POLY MMK5 RIFA/E
	C414	C353883	GRM40Y5V334Z16PT
	C415	C353883	GRM40Y5V334Z16PT
	C416	C353883	GRM40Y5V334Z16PT
	C417	C353883	GRM40Y5V334Z16PT
	C418	J0800317R	CP ELECTRO 47UF SMG 16
	C419	J0800317R	CP ELECTRO 47UF SMG 16
	C422	J0800317R	CP ELECTRO 47UF SMG 16
	C423	J0800317R	CP ELECTRO 47UF SMG 16
	C424	C140882	GRM40X7R103K50-550
	C425	C140882	GRM40X7R103K50-550
	C426	J0800317R	CP ELECTRO 47UF SMG 16
	C427	J0800317R	CP ELECTRO 47UF SMG 16
	C430	J0228736R	CC73SSL1H180JR
	C432	C353883	GRM40Y5V334Z16PT
	C510	J0890114R	CAP CERAMIC 10pf-D 50V CH
	C511	J0880194R	0.1UF 50V +-5% (100N)
	C513	C457883	GRM40Y5V474Z16PT
	C514	J0880031R	CQ93M1H102KEB (MF) N/PAN
	C515	J0880194R	0.1UF 50V +-5% (100N)
	C517	C353883	GRM40Y5V334Z16PT
	C518	J0800371F	ELECT CAP 3300UF 10V SMG
	C519	J0880053R	CQ93M1H473KEB(MF) N/PAN
	C520	J0893013R	CKM224K160B-2125
	C521	J0880194R	0.1UF 50V +-5% (100N)
	C522	J0228066R	GRM40CDG331J50PT
	C523	J0880064R	CQM - 334J500HFT
	C524	J0880064R	CQM - 334J500HFT
	C525	J0880064R	CQM - 334J500HFT
	C528	J0890121R	CAP CERAMIC 33pf-J 50V CH
	C529	J0890117R	CAP CERAMIC 18pf-J 50V CH
	C530	J0880039R	CQM472K500HFT
	C531	J0880194R	0.1UF 50V +-5% (100N)
	C533	C506182	5.6PF 50V 2% DRG NO
	C539	J0880194R	0.1UF 50V +-5% (100N)
	C540	J0893035R	CKM--222K500B CNT2125
	C541	J0880039R	CQM472K500HFT
	C542	J0800279R	ELECT CAP 1.UF 50V
	C543	J0893031R	CKM 102K500B CNT2125
	C544	J0893031R	CKM 102K500B CNT2125
	C545	J0893027R	CKM-104K250B-CNT2125

C546	C150711	CAP 100N 36521104 100V POL	
C547	J0800282R	CAP ELECTRO 2.2UF-M 50V	
C549	J0800326R	CEL-101M160WMFT	
C552	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C560	C457883	GRM40Y5V474Z16PT	
C601	J0800337R	CEL-221M350WMFT	
C602	J0800337R	CEL-221M350WMFT	
C603	J0880194R	0.1UF 50V +-5% (100N)	
C604	J0880033R	CQM-152K500HFT	
C605	C457759	470N 63V POLY MMK5 RIFA/E	
C608	J0880062R	CQ93M1H224KEB	
C609	J0880035R	CQ93M1H222KEB (MF) N/PAN	
C610	J0890092R	CAP CERAMIC 0.0022uF 50V	
C611	J0800337R	CEL-221M350WMFT	
C613	J0244505R	CER CAP 2n2-K 500V	
C614	J0244505R	CER CAP 2n2-K 500V	
C615	J0244505R	CER CAP 2n2-K 500V	
C701	J0243507R	CK45B2H331KB	
C702	J0257540F	ELEC CAP 4U7 250V	
C703	C142760	12N 1.6KV R/EVOX PHE428	
C704	JAJ00138	CC-222K202R-DF 2N2 2KV	
C705	J0299993F	CAP 18NF 5% 630V POLY	
C706U	C150711	CAP 100N 36521104 100V POL	
C707	JAJ00134	CK45-R3DD 102K-GR	
C708	J0245612F	CK45B3A472K	
C709	J0253952R	CEO4W2C1ROMP	
C710	J0253952R	CEO4W2C1ROMP	
C711	J0299932F	CQ93E2D334KPF	
C712	J0299929F	POLY CAP 180N 200V	
C713	J0299934F	CAP POLYPRO FILM 0.47UF	
C714	J0299934F	CAP POLYPRO FILM 0.47UF	
C715	J0243512R	CK45B2H821KB	
C716	C140707	CAP 10N 365-51103 MULARD	
C717	J0244213R	CKL-152K202R-DLT	
C719	J0253966F	CEO4W2D470N SME ECC	
C720	J0244503R	CK45B2H152KB	
C721	J0250511R	CAP POLY 0.022UF PHILIPS	
C724	J0800303R	ELECT CAP 22UF 50V SMG	
C724A	JAJ00121R	CK45-R3DD101K 100PF 2KV	
C724B	JAJ00121R	CK45-R3DD101K 100PF 2KV	
C736	J0880048R	CQT223K50MB (PANASONIC)	
C737	C160708	1UF +-10% 250V 368-45105	
C744	J0880048R	CQT223K50MB (PANASONIC)	
C749	J0880033R	CQM-152K500HFT	
C760U	JAJ00138	CC-222K202R-DF 2N2 2KV	⚠
C901	C648751	68NF 20% X2 250V ~BEABT	⚠
C902	J0262774N	0.22UF 250VAC X2 ~BEABT	⚠
C903	C648751	68NF 20% X2 250V ~BEABT	⚠
C904	C648751	68NF 20% X2 250V ~BEABT	
C905	C001544	220uf 400V SMG 30x35MM	
C906	J0800326R	CEL-101M160WMFT	
C907	J0244501R	CER CAP 1000PF-K 500V	
C908	J0244501R	CER CAP 1000PF-K 500V	
C909	JAJ00127R	CK45-R3DD 331K	
C910	J0880044R	CAP POLYESTER 0.01UF K50V	
C911	J0800303R	ELECT CAP 22UF 50V SMG	
C912	J0890081R	CK45B1H331KB (MURATA)	
C913	J0800335R	CAP ELECT 220UF 16V SMG	
C914	J0800294R	ELECT CAP 10UF 50V SMG	
C915	J0800356F	CEO4W1H471M (SMG)	
C916	J0244501R	CER CAP 1000PF-K 500V	
C917	J0880033R	CQM-152K500HFT	
C918	J0800335R	CAP ELECT 220UF 16V SMG	
C919	J0244501R	CER CAP 1000PF-K 500V	
C922	J0890078R	CK45B1H221KB (MURATA)	
C923	J0880037R	CQM332K500HFT	
C924	J0880037R	CQM332K500HFT	
C925	J0890075R	CER CAP 120pf-J 50V SL	
C926	J0880194R	0.1UF 50V +-5% (100N)	
C926A	J0243509R	CERAMIC CAP 470p 500V	
C950	JAJ00129R	CK45-R3DD 471K	
C951	J0243509R	CERAMIC CAP 470p 500V	
C952	J0243509R	CERAMIC CAP 470p 500V	
C955	J0253935F	ELEC CAP 3300uF 35V 7.5	
C956	J0244505R	CER CAP 2n2-K 500V	
C957	J0800363F	CEO4W1F102M (SMG)	
C958	J0253492	CAP ELEC 150UF-M 200V	
C961	J0800279R	ELECT CAP 1.UF 50V	
C962	J0880033R	CQM-152K500HFT	
C963	J0800329R	ELECT CAP 100UF 50V SMG	
C964	J0800288R	CAP ELECTRO 4.7UF-M 50V	
C967	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C970	J0800359F	CAP ELEC 1000uf-M SMG 10V	
C971	J0800294R	ELECT CAP 10UF 50V SMG	
C972	J0800329R	ELECT CAP 100UF 50V SMG	
C974	J0800353R	CAP ELECTRO 470UF 16V	
C976	J0880194R	0.1UF 50V +-5% (100N)	
C977	J0259431F	ELEC CAP 220UF 200V	
C978	J0800286R	CAP ELECTRO 4.7UF SMG 25V	
C979	J0880053R	CQ93M1H473KEB(MF) N/PAN	
C998	C333753	3N3 "Y"CLASS PME294 BEABT	⚠
C999	C130753	1N0 "Y" PME294 UL BEABT	⚠
CLIP	N235034	HEATSINK CLIP	
CP201	J2305541	SAW (L9453)	
CP202	E518050	G9251M SAW B/G SOUND	
CP501	E518068	SAW G3967M	
CRT BASE	A527250	A7 28" 16:9 CRT BASE	
D001	J2348921M	DIODE 1N4531	
D002	J2348921M	DIODE 1N4531	
D003	J2348921M	DIODE 1N4531	
D004	J2348921M	DIODE 1N4531	
D020	T531055	DIODE BAT85 SCHOTTKY MULL	
D200	J2348921M	DIODE 1N4531	
D202	J2348921M	DIODE 1N4531	
D203	J2348921M	DIODE 1N4531	
D2700	T531053	DIODE IN4148 MULL/PHIL/ITT	
D300	T531068	DIODE MA723/TP PANASONIC	
D301	T531068	DIODE MA723/TP PANASONIC	
D302	T531068	DIODE MA723/TP PANASONIC	
D504	T431113	DIODE BYD33J MULL BEAB	⚠
D505	T531056	DIODE BYV10-40 ~MULLARD	
D6	J2342834M	D10 BZX79B3V3	
D601	J2348921M	DIODE 1N4531	
D7	J2342834M	D10 BZX79B3V3	
D701	J2336612	RU3AM	
D702	T431113	DIODE BYD33J MULL BEAB	⚠
D703	J2343941M	RGP10G	
D706	T431117F	DIODE BY228 P/F PHILIPS	
D707	T531086F	BYW96E	
D708	J2348921M	DIODE 1N4531	
D709U	J2348921M	DIODE 1N4531	
D710	T431117F	DIODE BY228 P/F PHILIPS	
D713	T431113	DIODE BYD33J MULL BEAB	⚠
D714	T431113	DIODE BYD33J MULL BEAB	⚠
D719	T431113	DIODE BYD33J MULL BEAB	⚠
D732	T531055	DIODE BAT85 SCHOTTKY MULL	
D8	J2342834M	D10 BZX79B3V3	
D901	J2342711M	DIODE EM2A (SANKEN)	
D901BU	J2348921M	DIODE 1N4531	
D902	J2342711M	DIODE EM2A (SANKEN)	
D903	J2342711M	DIODE EM2A (SANKEN)	
D904	J2342711M	DIODE EM2A (SANKEN)	
D905	J2343962M	MPG06G	
D906	J2343962M	MPG06G	
D907	T531053	DIODE IN4148 MULL/PHIL/ITT	
D908	T531056	DIODE BYV10-40 ~MULLARD	
D909	T531053	DIODE IN4148 MULL/PHIL/ITT	
D910	J2343962M	MPG06G	
D911	T431113	DIODE BYD33J MULL BEAB	⚠

	D915	T531068	DIODE MA723/TP PANASONIC
⚠	D917	T431113	DIODE BYD33J MULL BEAB
	D949	J2348921M	DIODE 1N4531
	D950	T431127	BYR29F-700
	D950A	H224081	F9-4-186E ILS
	D951	T431145	BYW29E-200
	D951A	J4520883	M3X12 WITH SPRG WASHER
	D951B	J8821114	NUT 3
	D952	J2349991	DIO-BYW29F-200
	D954	J2348921M	DIODE 1N4531
	D955	J2348921M	DIODE 1N4531
	D957	J2348921M	DIODE 1N4531
	D958	J2348921M	DIODE 1N4531
	D959	J2343962M	MPG06G
	D960	J2343962M	MPG06G
	D961	T531069	SHOTTKY 30V/200mA/BAT254
	D963	J2348921M	DIODE 1N4531
	D965	J2348921M	DIODE 1N4531
	D966	J2348921M	DIODE 1N4531
	D967	T531055	DIODE BAT85 SCHOTTKY MULL
	D968	J2348921M	DIODE 1N4531
	D969	J2348921M	DIODE 1N4531
	D970	J2348921M	DIODE 1N4531
	D971	T531055	DIODE BAT85 SCHOTTKY MULL
	D972	J2348921M	DIODE 1N4531
	D974	J2343962M	MPG06G
	D986	J2348921M	DIODE 1N4531
	DRG ASSY	A527900	A7 UP ISS DRWG ASSY
	E300	E846825	A5 SCREEN LD 2PIN EHUK
	E301	E826923	21WAY SCART WITHOUT LUGS
	E302	E826923	21WAY SCART WITHOUT LUGS
	E303	J2673821	JAK-TCX0191-01A
	E304	OPTION	NOT FITTED
	E4000	E826158	HEADPHONE SKT SCJ-0348-1-C
	E800	E843241	CPT EARTH LEAD~GREENLIGHT
	E803	E846902	A7 CRT BASE LEAD 550mm
	E805	E846901	A7 CRT BASE LEAD 470mm
⚠	E901	J2721792	FUSE HOLDER UL/BEAB
⚠	E902	J2721792	FUSE HOLDER UL/BEAB
⚠	F901	E882368	FUSET3.15AL 250V UL BEABT
⚠	F902	E882359	FUSE GLASS T2.0AL BEABT
	FB001	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB002	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB003	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB004	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB005	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB1	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB2	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB3	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB4	E770091	EMI FILTER MURATA
	FB400	E770091	EMI FILTER MURATA
	FB401	E770091	EMI FILTER MURATA
	FB402	E770091	EMI FILTER MURATA
	FB5	J0195250R	RMC73S 000R
	FB6	E770091	EMI FILTER MURATA
	FB601	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB602	J2123461M	FERRITE BEAD 0.8uH
	FB610	J2123461M	FERRITE BEAD 0.8uH
	FB700	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB701	J2123461M	FERRITE BEAD 0.8uH
	FB703	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB706	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB900	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB901	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB902	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB904	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB906	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB950	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB951	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB952	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB954	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB956	J2123462M	FERRITE BEADS TYPE B2.3UH
	FB957	J2123462M	FERRITE BEADS TYPE B2.3UH
	IC001	T900742	SAA5296AGP/044 PHILIPS
	IC002	E730267	M27C512 V3.B CHK=2192
	IC003	T900726	PC74HCT573T PHILIPS
	IC004	T900868	ST-HC4016 SGS
	IC005	T900876	M24C16 EEPROM
	IC201	J2004461	ICL-TDA3843
	IC202	T900601	TDA 9802 MULTI PLL DMODC
	IC400	T900864	TDA9875A V2
	IC4000	J2020012	ICL-TDA7263M
	IC4000A	H235440	HEATSINK A7
	IC4000B	G884020	SPRING CLIP 56379-MULLARD
	IC4000C	B976404	HEAT SINK COMPOUND 340
	IC501	T900766	TDA8844/N2C
	IC601	T900926	TDA8350Q N6
	IC601A	H235441	HEATSINK A7
	IC601B	G884020	SPRING CLIP 56379-MULLARD
	IC601C	B976404	HEAT SINK COMPOUND 340
	IC602	T900667	LM7818
	IC602A	G884023	SPRING CLIP
	IC602C	B976404	HEAT SINK COMPOUND 340
	IC900	T900452	UC3844 SGS/UNITRODE
⚠	IC901	T548013	CNY17F1/6 SIEMENS BEABT
	IC950	T900646	LM339 QUA0 COMP SGS/MOT
	IC951	T900759	REG L7805CP ISOLATED
	IC951A	G884023	SPRING CLIP
	IC951C	B976404	HEAT SINK COMPOUND 340
	IC952	T900345	REG 7805 SGS/MOTO/NEC
	IC952A	H224075	H/SINK F9-4-220 &TAG COL
	IC954	T900796	&TL431CZ-AP SGS
	IR001	T549018	& IR REC TSOP2838UH1 TEMIC
	J281	J0195250R	RMC73S 000R
	J86	J0195250R	RMC73S 000R
	J900	J0195250R	RMC73S 000R
	L010	J2123103M	LAL 02 AXIAL COIL 10uH
	L011	J2123103M	LAL 02 AXIAL COIL 10uH
	L012	J2123103M	LAL 02 AXIAL COIL 10uH
	L200	J2123781R	FILTER COIL EL101K
	L201	H163007	BTC LINK 50MM(A/INSERTED)
	L202	J2122253M	AXIAL COIL 100uH K TAPE
	L203	L410169	TOKO 292GNS-40112
	L204	J2122956M	COIL LAL 100UH K
	L300	J2122943M	AXIAL COIL 10UH-J
	L301	J2122943M	AXIAL COIL 10UH-J
	L302	J2123103M	LAL 02 AXIAL COIL 10uH
	L303	J2123103M	LAL 02 AXIAL COIL 10uH
	L502	J2122253M	AXIAL COIL 100uH K TAPE
	L700	JBH00039	HC-820KS1 (LHL10)
	L702	L380115	LIN COIL LSLH13JW05SH
	L703	J2123781R	FILTER COIL EL101K
	L751	J2220641	E/W INJECTION COIL
	L752	L380147	&BRIDGE COIL
⚠	L901	L210063	M-FIL B82724-J2142-N1 BEAB
⚠	L902	L210063	M-FIL B82724-J2142-N1 BEAB
	L904	J2125579	CHOKE COIL 47UH
	L905	J2123781R	FILTER COIL EL101K
	L950	JBH00036R	HC-470KSI (LHL10TB)
	LED001	T547050	&SLR37VC3F LED ROHM
	PL300	J2902261	PLG-02P2R5VPWB
	PL304	J2902261	PLG-02P2R5VPWB
	PL4000	J2902263	PLG-04P2R5VPWB
	PL503	J2902265	PLG-06P2RVPWB
⚠	PL601	J2661752	3P PLUG PIN/BASE UL BEAB
	PL701	J2661753	4 PIN PLUG WITH BASE
	PL801	J2902264	PLG-05P 2R5V PWB
⚠	PL900	E825259	2 WAY MAIN HEADER UL BEAB
	PL902	J2661751	2P PIN PLUG & BASE
	Q001	J2326872R	TRS DTC114ES TAPE
	Q003	J2315891R	TRS JC548B
	Q004	J2315891R	TRS JC548B

Q005	J2315891R	TRS JC548B
Q1	J2315891R	TRS JC548B
Q200	T633151	BF240 PHILIPS
Q201	J2315891R	TRS JC548B
Q202	T631300	TRANS UN4213 PANASONIC
Q203	T631300	TRANS UN4213 PANASONIC
Q204	J2315921R	TRS JC558B
Q2700	T631304	BC547B TAPE
Q300	J2315891R	TRS JC548B
Q301	J2315891R	TRS JC548B
Q302	J2315891R	TRS JC548B
Q304	J2315891R	TRS JC548B
Q4000	J2315891R	TRS JC548B
Q500	J2315891R	TRS JC548B
Q503	J2315891R	TRS JC548B
Q505	J2315891R	TRS JC548B
Q508	J2315891R	TRS JC548B
Q601	T636077	&IRFS530A ISOL SAMSUNG
Q601B	J4520889	SCREW
Q601D	J8821114	NUT 3
Q701	T633137	TRANS BF459 MULLARD/SES
Q703	J2315891R	TRS JC548B
Q751	J2315451	TRS-BU2508AF
Q751A	H235305	HEATSINK G7PS 3
Q751B	G884027	SPRING CLIP
Q901	T636077	&IRFS530A ISOL SAMSUNG
Q902	J2315921R	TRS JC558B
Q903	T636072	BUT12AF NON SELECTED
Q903A	H235417	POWER HEATSINK(COPPER)
Q903B	G884027	SPRING CLIP
Q905	T633133	TRANS BF422 BAND MULL/AEG
Q906	J2315891R	TRS JC548B
Q907	J2315891R	TRS JC548B
Q908	J2315891R	TRS JC548B
Q950	J2315891R	TRS JC548B
Q951	T632084	BD438 TRANS'R MOTOROLA
Q952	T631265	BC546B
Q954	T633133	TRANS BF422 BAND MULL/AEG
Q957	T636069	BD909 SGS NON-IS0
Q957A	H234344	POWER HEATSINK G7PS3
Q957B	G311331	M3 FULLNUT
Q957D	F133310	M3X10MM POZI PAN M/C SCRW
Q957E	G560331	M3 SPRING WASHER~TR FAST~
Q959	J2315891R	TRS JC548B
R001	J0700027M	100R 1/16W C/FILM 5%
R002	J0700027M	100R 1/16W C/FILM 5%
R003	J0700027M	100R 1/16W C/FILM 5%
R004	J0700027M	100R 1/16W C/FILM 5%
R005	J0700027M	100R 1/16W C/FILM 5%
R006	J0195875R	RMC73S 2A101JR
R008	J0195912R	RMC73S 2A332JR
R010	E770091	EMI FILTER MURATA
R011	E770091	EMI FILTER MURATA
R012	J0700027M	100R 1/16W C/FILM 5%
R013	J0700027M	100R 1/16W C/FILM 5%
R015	J0700059M	27K 1/16W C/FILM 5%
R016	J0700034M	330R 1/16W C/FILM 5%
R017	J0187060M	RD14S1J621JB
R019	J0700054M	10K 1/16W C/FILM 5%
R020	J0700042M	1K2 1/16W C/FILM 5%
R021	J0700045M	2K2 1/16W C/FILM 5%
R023	J0700027M	100R 1/16W C/FILM 5%
R024	J0700027M	100R 1/16W C/FILM 5%
R025	J0700027M	100R 1/16W C/FILM 5%
R026	J0700027M	100R 1/16W C/FILM 5%
R028	J0195875R	RMC73S 2A101JR
R029	J0195875R	RMC73S 2A101JR
R030	J0195875R	RMC73S 2A101JR
R031	J0700027M	100R 1/16W C/FILM 5%
R032	J0700027M	100R 1/16W C/FILM 5%
R033	J0700027M	100R 1/16W C/FILM 5%
R034	J0700027M	100R 1/16W C/FILM 5%
R037	J0700027M	100R 1/16W C/FILM 5%
R038	J0700027M	100R 1/16W C/FILM 5%
R039	J0700027M	100R 1/16W C/FILM 5%
R044	E770091	EMI FILTER MURATA
R045	E770091	EMI FILTER MURATA
R046	E770091	EMI FILTER MURATA
R047	E770091	EMI FILTER MURATA
R048	E770091	EMI FILTER MURATA
R049	J0195885R	RMC73S 2A271JR
R050	J0195885R	RMC73S 2A271JR
R051	J0195885R	RMC73S 2A271JR
R052	J0195885R	RMC73S 2A271JR
R053	J0195885R	RMC73S 2A271JR
R054	J0195885R	RMC73S 2A271JR
R055	J0195885R	RMC73S 2A271JR
R056	J0195885R	RMC73S 2A271JR
R057	J0195885R	RMC73S 2A271JR
R058	J0195885R	RMC73S 2A271JR
R059	J0195885R	RMC73S 2A271JR
R065	R222330	220R 1/4W DRG NO
R067	J0700054M	10K 1/16W C/FILM 5%
R068	J0700054M	10K 1/16W C/FILM 5%
R069	J0700054M	10K 1/16W C/FILM 5%
R071	J0700054M	10K 1/16W C/FILM 5%
R072	J0700054M	10K 1/16W C/FILM 5%
R073	J0700049M	4K7 1/16W C/FILM 5%
R074	J0700049M	4K7 1/16W C/FILM 5%
R075	J0700027M	100R 1/16W C/FILM 5%
R076	J0700027M	100R 1/16W C/FILM 5%
R077	J0700027M	100R 1/16W C/FILM 5%
R078	J0700027M	100R 1/16W C/FILM 5%
R079	J0195875R	RMC73S 2A101JR
R080	J0700027M	100R 1/16W C/FILM 5%
R081	J0700027M	100R 1/16W C/FILM 5%
R082	J0700054M	10K 1/16W C/FILM 5%
R083	J0700027M	100R 1/16W C/FILM 5%
R084	J0700027M	100R 1/16W C/FILM 5%
R085	J0700027M	100R 1/16W C/FILM 5%
R086	J0700027M	100R 1/16W C/FILM 5%
R087	J0700054M	10K 1/16W C/FILM 5%
R088	J0700054M	10K 1/16W C/FILM 5%
R089	J0700049M	4K7 1/16W C/FILM 5%
R090	J0700059M	27K 1/16W C/FILM 5%
R091	J0700046M	2K7 1/16W C/FILM 5%
R093	J0700054M	10K 1/16W C/FILM 5%
R098	J0195925R	RMC73S 2A103JR
R1	E770091	EMI FILTER MURATA
R100	R247330	27K 1/4W DRG NO
R102	R323330	330R 1/4W DRG NO
R103	J0700027M	100R 1/16W C/FILM 5%
R107	J0700054M	10K 1/16W C/FILM 5%
R109	J0700059M	27K 1/16W C/FILM 5%
R110	J0700027M	100R 1/16W C/FILM 5%
R112	J0700042M	1K2 1/16W C/FILM 5%
R114	J0187038M	RES 75R 1/16W
R115	J0700027M	100R 1/16W C/FILM 5%
R129	J0700054M	10K 1/16W C/FILM 5%
R130	J0700054M	10K 1/16W C/FILM 5%
R131	J0195885R	RMC73S 2A271JR
R132	J0195885R	RMC73S 2A271JR
R133	J0195885R	RMC73S 2A271JR
R134	J0195885R	RMC73S 2A271JR
R135	J0195885R	RMC73S 2A271JR
R136	J0195885R	RMC73S 2A271JR
R137	J0195885R	RMC73S 2A271JR
R138	J0195885R	RMC73S 2A271JR
R140	J0700033M	270R 1/16W C/FILM 5%
R141	J0700033M	270R 1/16W C/FILM 5%
R142	J0700033M	270R 1/16W C/FILM 5%
R143	J0700033M	270R 1/16W C/FILM 5%

R144	J0700033M	270R 1/16W C/FILM 5%
R145	E770091	EMI FILTER MURATA
R156	J0700049M	4K7 1/16W C/FILM 5%
R157	J0700049M	4K7 1/16W C/FILM 5%
R2	E770091	EMI FILTER MURATA
R200	J0700055M	12K 1/16W C/FILM 5%
R201	J0700051M	5K6 1/16W C/FILM 5%
R202	J0700051M	5K6 1/16W C/FILM 5%
R204	R120330	100R 1/4W DRG NO
R205	R120330	100R 1/4W DRG NO
R207	J0700041M	1K 1/16W C/FILM 5%
R208	R110330	10R 1/4W DRG NO
R209	R110330	10R 1/4W DRG NO
R210	J0700027M	100R 1/16W C/FILM 5%
R211	J0700033M	270R 1/16W C/FILM 5%
R212	J0700049M	4K7 1/16W C/FILM 5%
R212A	J0700041M	1K 1/16W C/FILM 5%
R213	J0700027M	100R 1/16W C/FILM 5%
R214	J0187086M	RD14S1J752JB
R215	J0700027M	100R 1/16W C/FILM 5%
R216	J0700038M	680R 1/16W C/FILM 5%
R217	J0700046M	2K7 1/16W C/FILM 5%
R218	J0700046M	2K7 1/16W C/FILM 5%
R219	J0700043M	1K5 1/16W C/FILM 5%
R22	J0195250R	RMC73S 000R
R220	J0700045M	2K2 1/16W C/FILM 5%
R221	J0700038M	680R 1/16W C/FILM 5%
R222	J0700027M	100R 1/16W C/FILM 5%
R223	J0700035M	390R 1/16W C/FILM 5%
R224	J0700046M	2K7 1/16W C/FILM 5%
R225	J0700058M	22K 1/16W C/FILM 5%
R226	J0700058M	22K 1/16W C/FILM 5%
R227	J0700038M	680R 1/16W C/FILM 5%
R228	J0700034M	330R 1/16W C/FILM 5%
R230	J0700047M	3K3 1/16W C/FILM 5%
R26	J0195250R	RMC73S 000R
R27	J0195250R	RMC73S 000R
R2700	R120330	100R 1/4W DRG NO
R3	J0195013R	RMC73 2B102JR
R300	R715330	75R 1/4W DRG NO
R301	J0700054M	10K 1/16W C/FILM 5%
R302	R715330	75R 1/4W DRG NO
R303	J0700052M	6K8 1/16W C/FILM 5%
R304	J0700054M	10K 1/16W C/FILM 5%
R305	J0700067M	100K 1/16W C/FILM 5%
R306	J0700036M	470R 1/16W C/FILM 5%
R307	J0700036M	470R 1/16W C/FILM 5%
R308	J0700067M	100K 1/16W C/FILM 5%
R309	J0700054M	10K 1/16W C/FILM 5%
R310	R120330	100R 1/4W DRG NO
R311	R715330	75R 1/4W DRG NO
R312	R715330	75R 1/4W DRG NO
R313	R715330	75R 1/4W DRG NO
R314	R120330	100R 1/4W DRG NO
R315	R120330	100R 1/4W DRG NO
R316	J0700052M	6K8 1/16W C/FILM 5%
R317	J0700054M	10K 1/16W C/FILM 5%
R318	R715330	75R 1/4W DRG NO
R319	J0700067M	100K 1/16W C/FILM 5%
R320	J0700036M	470R 1/16W C/FILM 5%
R321	J0700036M	470R 1/16W C/FILM 5%
R322	R715330	75R 1/4W DRG NO
R323	J0700067M	100K 1/16W C/FILM 5%
R324	J0700064M	56K 1/16W C/FILM 5%
R325	J0700067M	100K 1/16W C/FILM 5%
R326	J0700027M	100R 1/16W C/FILM 5%
R327	J0700064M	56K 1/16W C/FILM 5%
R328	J0700064M	56K 1/16W C/FILM 5%
R329	J0700027M	100R 1/16W C/FILM 5%
R330	J0700067M	100K 1/16W C/FILM 5%
R331	J0700064M	56K 1/16W C/FILM 5%
R334	R715330	75R 1/4W DRG NO
R335	J0700027M	100R 1/16W C/FILM 5%
R337	J0700038M	680R 1/16W C/FILM 5%
R338	J0700058M	22K 1/16W C/FILM 5%
R339	J0700027M	100R 1/16W C/FILM 5%
R340	J0700054M	10K 1/16W C/FILM 5%
R341	R110330	10R 1/4W DRG NO
R349	J0700027M	100R 1/16W C/FILM 5%
R350	J0700054M	10K 1/16W C/FILM 5%
R351	J0700058M	22K 1/16W C/FILM 5%
R352	J0700038M	680R 1/16W C/FILM 5%
R4	J0195925R	RMC73S 2A103JR
R400	J0700027M	100R 1/16W C/FILM 5%
R4001	J0700054M	10K 1/16W C/FILM 5%
R4002	J0700054M	10K 1/16W C/FILM 5%
R4004	R132330	1K2 1/4W DRG NO
R4005	R417330	47R 1/4W DRG NO
R4006	R921330	910R 1/4W DRG NO
R4007	R132330	1K2 1/4W DRG NO
⚠ R4008	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4009	R417330	47R 1/4W DRG NO
R401	J0700027M	100R 1/16W C/FILM 5%
R4010	J0700064M	56K 1/16W C/FILM 5%
⚠ R4011	R407551	4R7 1/4W FR8225(TDK)~BEAB~
R4014	R526330	560R 1/4W DRG NO
R4015	R526330	560R 1/4W DRG NO
R403	J0700054M	10K 1/16W C/FILM 5%
R408	J0195250R	RMC73S 000R
R410	J0700041M	1K 1/16W C/FILM 5%
R411	J0700041M	1K 1/16W C/FILM 5%
R412	J0700057M	18K 1/16W C/FILM 5%
R413	J0187092M	RD14S1J133JB
R414	J0187092M	RD14S1J133JB
R415	J0700057M	18K 1/16W C/FILM 5%
R416	J0195885R	RMC73S 2A271JR
R417	J0195250R	RMC73S 000R
R418	J0195931R	RMC73S 2A183JR
R419	J0195931R	RMC73S 2A183JR
R449	J0700054M	10K 1/16W C/FILM 5%
R501	J0700035M	390R 1/16W C/FILM 5%
R502	J0700041M	1K 1/16W C/FILM 5%
R503	J0700027M	100R 1/16W C/FILM 5%
R504	J0700027M	100R 1/16W C/FILM 5%
R505	J0700031M	180R 1/16W C/FILM 5%
R508	J0700041M	1K 1/16W C/FILM 5%
R509U	J0700052M	6K8 1/16W C/FILM 5%
R513	J0700041M	1K 1/16W C/FILM 5%
R514	J0700027M	100R 1/16W C/FILM 5%
R515	J0700027M	100R 1/16W C/FILM 5%
R516	J0700027M	100R 1/16W C/FILM 5%
R517	J0700052M	6K8 1/16W C/FILM 5%
R523	J0700067M	100K 1/16W C/FILM 5%
R524	R323330	330R 1/4W DRG NO
R525	J0700058M	22K 1/16W C/FILM 5%
R526	J0700058M	22K 1/16W C/FILM 5%
R532	R128330	180R 1/4W DRG NO
R534	J0700027M	100R 1/16W C/FILM 5%
R536	R120330	100R 1/4W DRG NO
R537	J0700059M	27K 1/16W C/FILM 5%
R538	J0700063M	47K 1/16W C/FILM 5%
R539	J0700056M	15K 1/16W C/FILM 5%
R542	J0195941R	RMC73S 2A473JR
R543	J0700067M	100K 1/16W C/FILM 5%
R544	J0700069M	150K 1/16W C/FILM 5%
R545	R349725	39K MRS16T 1% M/FILM
R549	J0700031M	180R 1/16W C/FILM 5%
R550	R110330	10R 1/4W DRG NO
R551	J0187071M	RES 1K8 1/16W
R552	J0700027M	100R 1/16W C/FILM 5%
R560	J0195947R	RMC73S 2A823JR
R570	J0195250R	RMC73S 000R

R571	J0195250R	RMC73S 000R
R600	R437330	4K7 1/4W DRG NO
R601	R330330	3K 1/4W DRG NO
R602	R100736	1R 1/4W 1% MFR4
R603	R202330	2R2 1/4W DRG NO
R610	R140330	10K 1/4W DRG NO
R612	R447330	47K 1/4W DRG NO
R614	J0113735M	RD14S2H271JB
R619	J0147630	7W 6.8R WIRE WOUND ~PAN~
R623	J0113725M	100R RES CARBON FILM 1/2W
R701	J0140933S	RSL-472J7WS(BSR-Z)
R702	R120330	100R 1/4W DRG NO
R704	J0700027M	100R 1/16W C/FILM 5%
R706U	R100330	1R0 1/4W DRG NO
R707	R437330	4K7 1/4W DRG NO
R709	R319330	39R 1/4W DRG NO
R714	J0113748M	RD14S2H821JB
R715	R140570	10K 1W 5% MO1SL F
R718	R254736	240K 1/4W M/F MFR4 1%
R719	J0119647M	RN14S2B473FB
R724	J0110273S	RSO8B3D153JS
R725	R145549	15K FF84~WELWYN~
R726	J0113778M	RD14S2H153JB
R732	R155330	150K 1/4W DRG NO
R733	R323330	330R 1/4W DRG NO
R735	J0147630	7W 6.8R WIRE WOUND ~PAN~
R736	R638330	6K8 1/4W DRG NO
R737	R232330	2K2 1/4W DRG NO
R739	R822330	820R 1/4W DRG NO
R740	R359725	390K 1/16W MRS16T 1% M/F
R748	R130330	1K 1/4W DRG NO
R749	R437736	4K7 MFR4 +/- 1% M/FILM
R751	J0147630	7W 6.8R WIRE WOUND ~PAN~
R752	R447330	47K 1/4W DRG NO
R759	R437330	4K7 1/4W DRG NO
R764	R658330	680K 1/4W DRG NO
R766	R000621	&RES 1R 1OW VTM CER 5%
R900	J0700034M	330R 1/16W C/FILM 5%
R901	R242571	22K 2W M02S
R902	R536736	5K6 MFR4 1%
R903	J0147054AF	RW99J3D180KAF
R904	R132859	KP292/1 1K2 3W VTM
R905	R150736	100K 1/4W MFR4 1%
R906	R333725	3K3 MRS16T 1% M/FILM
R907	J0700067M	100K 1/16W C/FILM 5%
R908	R148725	18K MRS16T 1% M/FILM
R909	J0700058M	22K 1/16W C/FILM 5%
R910	R000618	0.5R 2W WIRE WOUND 5%
R911	J0700055M	12K 1/16W C/FILM 5%
R912	R319330	39R 1/4W DRG NO
R914	J0700041M	1K 1/16W C/FILM 5%
R916	R546725	56K MRS16T 1% M/FILM
R917	R145725	15K MRS16T 1% M/FILM
R918	J0700042M	1K2 1/16W C/FILM 5%
R919	J0700037M	560R 1/16W C/FILM 5%
R920	R333330	3K3 1/4W DRG NO
R922	J0700029M	150R 1/16W C/FILM 5%
R924	J0700043M	1K5 1/16W C/FILM 5%
R925	J0700056M	15K 1/16W C/FILM 5%
R928	R343570	33K 1W 5% MO1S
R930	R152725	120K 1/16W MRS16T 1% M/F
R947	J0700066M	82K 1/16W C/FILM 5%
R948	J0700041M	1K 1/16W C/FILM 5%
R949	J0700046M	2K7 1/16W C/FILM 5%
R950	R648570	68K 1W 5% MO1S F
R950A	J0100101M	RD14S2B333JB
R951	R142546	RES 12K 1W FA83 WELWYN
R952	J0113772M	RD14S2H822JB
R952A	J0700054M	10K 1/16W C/FILM 5%
R953	J0700046M	2K7 1/16W C/FILM 5%
R955	R457725	470K 1/16W MRS16T 1% M/F
R956	R132330	1K2 1/4W DRG NO
R957	J0700049M	4K7 1/16W C/FILM 5%
R958	J0700041M	1K 1/16W C/FILM 5%
R959	R145725	15K MRS16T 1% M/FILM
R960	J0700049M	4K7 1/16W C/FILM 5%
R961	R832725	8K2 MRS16T 1% M/FILM
R962	J0700067M	100K 1/16W C/FILM 5%
R963	R252725	220K 1/16W MRS16T 1% M/F
R964	R437725	4K7 MRS16T 1% M/FILM
R966	R437725	4K7 MRS16T 1% M/FILM
R967	R000708	11.5K MRS16T 1% 1/16W
R968	R140725	10K MRS16T 1% M/FILM
R969	R140725	10K MRS16T 1% M/FILM
R970	R141725	11K MRS16T 1% M/FILM
R971	J0700054M	10K 1/16W C/FILM 5%
R972	R000709	64.9K MRS16T 1% 1/16W
R973	R941725	91K MRS16T 1% M/FILM
R974	J0147516	RES 1R 5W 7APK
R977	OPTION	NOT FITTED
R981	J0700046M	2K7 1/16W C/FILM 5%
R982	R130330	1K 1/4W DRG NO
R985	R427571	470R 2W 5% M02S F
R986	R526571	560R 2W 5% M02S F
R989	R407542	4R7 1W FF83 WELWYN
R991	J0700054M	10K 1/16W C/FILM 5%
R992	R628858	680R 4W VTM KP292 15mmP
R993	J0700041M	1K 1/16W C/FILM 5%
⚠ R999	R170727	10M 1W VR68 UL BEAB
⚠ RL2700	E171111	RELAY OSA-SS-212DM5 BEAB
SW001	E139506	5 WAY TACT SWITCH
⚠ SW900	J2633391	M/SWITCH (PROMIMET) BEABT
⚠ T701	J2436771	FBT-C87LLI ~BEABT
T702	J2260291U	H DRIVE TRANSFORMER TAW
⚠ T900	L380122	SMT-SLOT FAE42/15 BEABT
TH900	E441044	PTC TYPE 2322-662-96609
U201	E710056	UVE25-EW54D HYP MITS EXP
VR923	J0160421R	RTD-6H201BSS-TAPE(PANA)
VR950	J0160211R	EVND8AA03B13-TAPE(PANA)
W001	EC530403	7/0.2MM S000029
W012	EC520802	7/0.2MM S000029
W013	EC520502	7/0.2 S000010
W014	EC530603	7/0.2MM S000010
W2700	W024001	0.56ML SFT TIN'D COP WIRE
W800	EC5A400A	7/0.2MM S000030
X001	E516030F	12MHz X'TAL NDK 5MM LEG
X201	E518064	MKT40MA100P MURATA
X202	E518069	MKT31.9MA110
X400	E516056F	24.576MHZ CRYSTAL
X501	E516048F	4.43MHZ X'TAL NDK 5MM LEG
X502	J2791502	X'TAL 3.58MHZ NDK
Z308/311U	W470200	1MM 1/D SLEEVING BLACK
Z901BU	J9451136	UL CSA TUBE N08
Z905A	W470200	1MM 1/D SLEEVING BLACK
Z905B	W470200	1MM 1/D SLEEVING BLACK
ZD001	T536179	BZX79C 6V2~PHILIPS~
ZD003	T536225	BZX79B 6V2 ~PHILIPS~
ZD200	T536215	BZX 79C 33V~PHILIPS~
ZD4000	T536177	BZX79C 12V~PHILIPS~
ZD4001	T536177	BZX79C 12V~PHILIPS~
ZD4002	T536171	BZX79C36V~PHILIPS~
ZD4003	T536171	BZX79C36V~PHILIPS~
ZD4004	T536171	BZX79C36V~PHILIPS~
ZD4006	T536215	BZX 79C 33V~PHILIPS~
ZD501	T536186	BZX79C 8V2~PHILIPS~
ZD502	T536186	BZX79C 8V2~PHILIPS~
ZD503	T536186	BZX79C 8V2~PHILIPS~
ZD504	T536284	BZX284-C9V1
ZD505	T536184	BZX79C 9V1~PHILIPS~
ZD506	T536184	BZX79C 9V1~PHILIPS~
ZD507	T536184	BZX79C 9V1~PHILIPS~
ZD508	T536280	BZX284-C6V2

ZD600	T536184	BZX79C 9V1~PHILIPS~
ZD602	T536174	BZX79C 5V1~PHILIPS~
ZD603	T536259	BZX79C56V
ZD610	T536237	BZX79B24V~PHILIPS~
ZD612	T536184	BZX79C 9V1~PHILIPS~
ZD700	T536236	BZX79B22V~PHILIPS~
ZD704	T536246	ZENER 18V 1.3W MULL
ZD705	T536215	BZX 79C 33V~PHILIPS~
ZD706	T536185	BZX79C 5V6~PHILIPS~
ZD717	J2339251M	HZS36-ILT
ZD902	T536246	ZENER 18V 1.3W MULL
ZD903	T536266	BZV85-C27V
ZD904	T536176	BZX 79C10V~PHILIPS~
ZD950	T536207	DIODE BZV10 REF MULLARD
ZD951	OPTION	NOT FITTED
ZD957	T536226	BZX79B6V8
ZD970	J2344122M	PGKE180AG23
ZR706U	B912312	WHITE TAPE N069X12X33

	A528140		**A7 2 DIN ASSY**
	#400	H235424	&2 DIN SKT BRACKET
	#403	G916019	SNAP RIVET
	#404	G916019	SNAP RIVET
	#405	N234038	&SHIELD
⚠	B400	E6550001	A7 DIN BOARD BEAB
	DRG1	A528141/01/01	DIN ASSY DRG A7 SHEET 1
	E400	J2983041	EXT SPK CON WITH SWITCH
	E401	J2983041	EXT SPK CON WITH SWITCH
	MD405	DRG0262	SHIELD MOD DRG
	PL400	J2902263	PLG-04P2R5VPWB
	PL401	J2902262	PLG-03P 2R5V PWB

	A529441		**PFC ASSY**
	#9000	N935165	PFC PCB FRAME
⚠	B9000	PC56101	A7 PFC PCB BEAB
	C9001	C150763	&100NF 20% X2 275V BEABT
	E9000	E843370	PFC MAINS LEAD
	F9000	E882368	FUSET3.15AL 250V UL BEABT
	F900A	J2721792	FUSE HOLDER UL/BEAB
	L9000	L380185	PFC COIL PHIL 42MH 1.2A
	L9000A	N331026	SPEAKER BOSS SPACER
	L9000B	F813308	M3X08 FHTC SCR ~TR FAST~
	PL9000	E825259	2 WAY MAIN HEADER UL BEAB

	C24W410SNA		**FINAL ASSY**
	#2120	X100072	A7 R/C CLE-921A (UK)
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240781F	24" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3100	E511136	15W 8R FOSTER L25-9741
	#4005	X212805	F/F PAINT & PRINT I/H
	#4010	X640281	HITACHI BADGE
	#4041	N285047	ANTI-VIBRATION STRIP~TSA
	#4042	N285047	ANTI-VIBRATION STRIP~TSA
	#4043	N285047	ANTI-VIBRATION STRIP~TSA
	#4044	N283050	FELT STRIP 30X10 TSA
	#4050	X321205	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	G864002	CABLE TIE (TWIST TYPE)
	#4063	J3731082	PURSE LOCK
	#4065	G864006	CABLE TIE T18R
	#4066	J3731082	PURSE LOCK
	#4067	G864006	CABLE TIE T18R
	#4068	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4091	N332070	SPACER
⚠	#4100	E843352	FIL M/PLUG/SOCKET UK BEAB
	#4120	X551791	CONCEALED CONTROL TRIM
	#4130	X263544	CONTROL DOOR
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883625	M6X25 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#6010	G864006	CABLE TIE T18R
	E1	E841052	CPT EARTH BRAID ~DRG~
	E2	H114006	EARTHING SPRING
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846941	SPEAKER LEAD
⚠	L910	L130047	59CM DGC84-098-4** BEAB
	LABEL3	X870291	LABEL
	LABEL4	X870291	LABEL
	LABEL5	X870291	LABEL
	N7	N934066	DEGUASSING COIL HOLDER
⚠	V1	T156020	W56ECK001X03 BEAB

	C24W430N		FINAL ASSY
	#2120	X100072	A7 R/C CLE-921A (UK)
⚠	#3000	X240785F	24 BACKCOVER BEAB
	#3100	E511136	15W 8R FOSTER L25-9741
	#4005	X213134	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321205	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	G864002	CABLE TIE (TWIST TYPE)
	#4063	J3731082	PURSE LOCK
	#4065	G864006	CABLE TIE T18R
	#4066	J3731082	PURSE LOCK
	#4067	G864006	CABLE TIE T18R
	#4068	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4091	N332070	SPACER
⚠	#4100	E843352	FIL M/PLUG/SOCKET UK BEAB
	#4120	X551791	CONCEALED CONTROL TRIM
	#4130	X263544	CONTROL DOOR
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883625	M6X25 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#5000	N936193F	CHASSIS FRAME
	#8110	X711836	STAND ASSEMBLY
	#A03	F813312	M3X12 FHTC SCR ~TR FAST~
	E1	E841052	CPT EARTH BRAID ~DRG~
	E2	H114006	EARTHING SPRING
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846941	SPEAKER LEAD
⚠	L910	L130047	59CM DGC84-098-4** BEAB
	N7	N934066	DEGUASSING COIL HOLDER
	U201	E710068	TUNER U1344/S MKII UK
⚠	V1	T156020	W56ECK001X03 BEAB

	C24W511TNA		**FINAL ASSY**
	#2120	X100072	A7 R/C CLE-921A (UK)
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
⚠	#3000	X240784F	24" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3100	E511136	15W 8R FOSTER L25-9741
	#4005	X212804	F/F PAINT & PRINT I/H
	#4010	X640281	HITACHI BADGE
	#4041	N285047	ANTI-VIBRATION STRIP~TSA
	#4042	N285047	ANTI-VIBRATION STRIP~TSA
	#4043	N285047	ANTI-VIBRATION STRIP~TSA
	#4044	N283050	FELT STRIP 30X10 TSA
	#4050	X321204	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	G864002	CABLE TIE (TWIST TYPE)
	#4063	J3731082	PURSE LOCK
	#4065	G864006	CABLE TIE T18R
	#4066	J3731082	PURSE LOCK
	#4067	G864006	CABLE TIE T18R
	#4068	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4091	N332070	SPACER
⚠	#4100	E843352	FIL M/PLUG/SOCKET UK BEAB
	#4120	X551791	CONCEALED CONTROL TRIM
	#4130	X263544	CONTROL DOOR
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883625	M6X25 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6010	G864006	CABLE TIE T18R
	A01	A528590	C24W511TNA M/BRD A7 DOLBY
	E1	E841052	CPT EARTH BRAID ~DRG~
	E2	H114006	EARTHING SPRING
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846941	SPEAKER LEAD
⚠	L910	L130047	59CM DGC84-098-4** BEAB
	N7	N934066	DEGUASSING COIL HOLDER
⚠	V1	T156020	W56ECK001X03 BEAB

	C28W410SNA		FINAL ASSY
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
⚠	#3000	X240938	28" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X212966	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321205	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#6060	B912319	WHITE GLASS NO69X19X33
	#6061	B912319	WHITE GLASS NO69X19X33
	A01	A529130	28W410SN MAIN PWB ASSY
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E843352	FIL M/PLUG/SOCKET UK BEAB
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T166033	W66QBD240X11 BEAB
	ZV1	B961105	SILCONE ADH 744 310ML

	C28W410TN		FINAL ASSY
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240938	28" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X213111	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321201	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	A01	A528690	C28W410TNA MAIN BOARD
	DW02	A783719/01/07	FINAL ASSEMBLY DRAWING
	DW03	A783740/01/03	PACKAGING DRAWING
	DW04	A783391/01/14	ACCESSORY & LIT ASSY DRG
	DW08	A783811/01/02	RATING PLATE PRINT SPEC
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E846815	FIL M/PLG/SOC UK ~BEAB~
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T166033	W66QBD240X11 BEAB

	C28W411TNA		FINAL ASSY
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240937	28" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X212967	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321204	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E843352	FIL M/PLUG/SOCKET UK BEAB
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD1	DRG0413	MODIFICATION DRAWING
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T166033	W66QBD240X11 BEAB
	ZV1	B961105	SILCONE ADH 744 310ML

	C28W430N		FINAL ASSY
	#2120	JHL01352	R/C CLE942B
⚠	#3000	X240934F	BACK COVER BEAB
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X213133F	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321205	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4082	N332040	SPACER
	#4120	X551792	CONCEALED CONTROL TRIM
	#4130	X263544	CONTROL DOOR
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#5000	N936193F	CHASSIS FRAME
	#5070	G291311	3X12 BT SCREW (BLACK)
	#A03	F813312	M3X12 FHTC SCR ~TR FAST~
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E843352	FIL M/PLUG/SOCKET UK BEAB
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N13	S020151	ALIGNMENT SPEC ASSEMBLY
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
	U201	E710068	TUNER U1344/S MKII UK
⚠	V1	T166033	W66QBD240X11 BEAB

	C28W510SNA		FINAL ASSY
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240938	28" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X212968	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321205	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6060	B912319	WHITE GLASS NO69X19X33
	#6061	B912319	WHITE GLASS NO69X19X33
	#9999	N286011	ANTI-VIBRATION STRIP~TSA
	A01	A529120	28W510SN MAIN PWB ASSY
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E843352	FIL M/PLUG/SOCKET UK BEAB
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD1	DRG0413	MODIFICATION DRAWING
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T166033	W66QBD240X11 BEAB
	ZV1	B961105	SILCONE ADH 744 310ML

	C28W510TN		FINAL ASSY
	#2080	G958044	STAPLE 'C'3/4 INS STEEL
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240938	28" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X213112	FRONT FRAME PAINTED I/H
	#4010	X640281	HITACHI BADGE
	#4050	X321201	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6060	B912319	WHITE GLASS NO69X19X33
	#6061	B912319	WHITE GLASS NO69X19X33
	A01	A528710	C28W510TNA MAIN BOARD
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E846815	FIL M/PLG/SOC UK ~BEAB~
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD1	DRG0413	MODIFICATION DRAWING
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T166033	W66QBD240X11 BEAB
⚠	V1	T166031	Philips CRT
⚠	V1	T166033	LG CRT
⚠	V1	T166037	Panasonic CRT

	C28W511NA		**FINAL ASSY**
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240937	28" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X213115	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321204	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6060	B912319	WHITE GLASS NO69X19X33
	#6061	B912319	WHITE GLASS NO69X19X33
	A01	A529120	28W510SN MAIN PWB ASSY
	E1	E841064	CPT EARTH BRAID
	E2	H114002	CRT EARTHING SPRING
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E843352	FIL M/PLUG/SOCKET UK BEAB
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
	V1	T166033	W66QBD240X11 BEAB
	ZV1	B961105	SILCONE ADH 744 310ML

	C32W1TN		FINAL ASSY
	#1400	J3875771	4 TO 2 LATCH
⚠	#1401	J2956783	CON-CP02PC-M3239A391~BEAB~
	#2120	X100072	A7 R/C CLE-921A (UK)
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240762	& 32" BACKCOVER - BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3100	E511132	10W 8R SPK O/WOLFF
	#4005	X212817	*&F/FRAME PAINT & PRINT
	#4010	X640281	HITACHI BADGE
	#4041	N285045	ANTI-VIBRATION STRIP~TSA
	#4042	N286011	ANTI-VIBRATION STRIP~TSA
	#4043	N286011	ANTI-VIBRATION STRIP~TSA
	#4050	X321201	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	J3731082	PURSE LOCK
	#4063	J3731082	PURSE LOCK
	#4064	G864002	CABLE TIE (TWIST TYPE)
	#4065	G864006	CABLE TIE T18R
	#4067	G864006	CABLE TIE T18R
	#4069	G864006	CABLE TIE T18R
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
⚠	#4100	E846815	FIL M/PLG/SOC UK ~BEAB~
	#4120	X551791	CONCEALED CONTROL TRIM
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6010	G864006	CABLE TIE T18R
	#6015	G864008	CABLE TIE T18L H.S.
	A01	A528130	C32W1TN(A) MAIN BOARD
	E1	E841068	EARTH BRAID 32"
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846942	&SPEAKER LEAD (32")
⚠	L910	L130049	76CM DGC84-098-4** BEAB
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T176001	W76ESF031X13 - BEAB

	C32W510SNA		FINAL ASSY
	#1400	J3875771	4 TO 2 LATCH
⚠	#1401	J2956783	CON-CP02PC-M3239A391~BEAB~
	#1402	H122015	MAINS KNOB SPRING
	#1403	X321205	MAINS KNOB
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240762	& 32" BACKCOVER - BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3100	E511134	C122P01H0112 SPK FOSTER
	#4005	X212995	FRONT FRAME PAINTED
	#401/#401A	J2169513	COIL LX-ZCAT2032
	#4010	X640281	HITACHI BADGE
	#4041	N285045	ANTI-VIBRATION STRIP~TSA
	#4042	N286011	ANTI-VIBRATION STRIP~TSA
	#4043	N286011	ANTI-VIBRATION STRIP~TSA
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	J3731082	PURSE LOCK
	#4063	J3731082	PURSE LOCK
	#4064	G864002	CABLE TIE (TWIST TYPE)
	#4065	G864006	CABLE TIE T18R
	#4067	G864006	CABLE TIE T18R
	#4069	G864006	CABLE TIE T18R
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
⚠	#4100	E843352	FIL M/PLUG/SOCKET UK BEAB
	#4120	X551791	CONCEALED CONTROL TRIM
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6010	G864006	CABLE TIE T18R
	#6015	G864008	CABLE TIE T18L H.S.
	A01	A528210	C32WD2TN2(A)/510SN/511TN
	E1	E841068	EARTH BRAID 32"
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846942	&SPEAKER LEAD (32")
	V1	T176001	W76ESF031X13 BEAB
	L910	L130049	76CM DGC84-098-4** BEAB

	C32W511TNA		FINAL ASSY
	#1400	J3875771	4 TO 2 LATCH
⚠	#1401	J2956783	CON-CP02PC-M3239A391~BEAB~
	#1402	H122015	MAINS KNOB SPRING
	#1403	X321204	MAINS KNOB
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X213121	32" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3100	E511134	C122P01H0112 SPK FOSTER
	#4005	X212992	32" FRONT FRAME PAINTED
	#401/#401A	J2169513	COIL LX-ZCAT2032
	#4010	X640281	HITACHI BADGE
	#4041	N285045	ANTI-VIBRATION STRIP~TSA
	#4042	N286011	ANTI-VIBRATION STRIP~TSA
	#4043	N286011	ANTI-VIBRATION STRIP~TSA
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	J3731082	PURSE LOCK
	#4063	J3731082	PURSE LOCK
	#4064	G864002	CABLE TIE (TWIST TYPE)
	#4065	G864006	CABLE TIE T18R
	#4069	G864006	CABLE TIE T18R
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
⚠	#4100	E843352	FIL M/PLUG/SOCKET UK BEAB
	#4120	X551791	CONCEALED CONTROL TRIM
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6010	G864006	CABLE TIE T18R
	#6015	G864008	CABLE TIE T18L H.S.
	A01	A528210	C32WD2TN2(A)/510SN/511TN
	E1	E841068	EARTH BRAID 32"
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846942	&SPEAKER LEAD (32")
⚠	L910	L130049	76CM DGC84-098-4** BEAB
	MD380	DRG0380	DEG COIL DRESSING DRG
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T176001	W76ESF031X13 - BEAB
⚠	V1	T176006	W76QAG280X11 - BEAB

	C32WD2TN2		FINAL ASSY
	#1400	J3875771	4 TO 2 LATCH
⚠	#1401	J2956783	CON-CP02PC-M3239A391~BEAB~
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
⚠	#3000	X240762	& 32" BACKCOVER - BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3100	E511134	C122P01H0112 SPK FOSTER
	#4005	X212818	32" FRONT FRAME (LG)
	#401/#401A	J2169513	COIL LX-ZCAT2032
	#4010	X640281	HITACHI BADGE
	#4041	N285045	ANTI-VIBRATION STRIP~TSA
	#4042	N286011	ANTI-VIBRATION STRIP~TSA
	#4043	N286011	ANTI-VIBRATION STRIP~TSA
	#4050	X321201	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	J3731082	PURSE LOCK
	#4063	J3731082	PURSE LOCK
	#4064	G864002	CABLE TIE (TWIST TYPE)
	#4065	G864006	CABLE TIE T18R
	#4069	G864006	CABLE TIE T18R
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
⚠	#4100	E846815	FIL M/PLG/SOC UK ~BEAB~
	#4120	X551791	CONCEALED CONTROL TRIM
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6010	G864006	CABLE TIE T18R
	#6015	G864008	CABLE TIE T18L H.S.
	A01	A528210	C32WD2TN2(A)/510SN/511TN
	E1	E841068	EARTH BRAID 32"
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846942	&SPEAKER LEAD (32")
⚠	L910	L130049	76CM DGC84-098-4** BEAB
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T176001	W76ESF031X13 - BEAB

	CL28W410		**FINAL ASSY**
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240938	28" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X213111	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321201	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#6060	B912319	WHITE GLASS NO69X19X33
	#6061	B912319	WHITE GLASS NO69X19X33
	A01	A528700	CL28W410TANA MAIN BOARD
	DW02	A783719/0:	FINAL ASSEMBLY DRAWING
	DW03	A783740/0:	PACKAGING DRAWING
	DW04	A783391/0:	ACCESSORY & LIT ASSY DRG
	DW08	A783811/0:	RATING PLATE PRINT SPEC
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E846916	EUROCORD FILTERED BEAB
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	MD6060	DRG0326	DEG COIL MOD DRG
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T166033	W66QBD240X11 BEAB

	CL32WD2TAN2A		**FINAL ASSY**
⚠	#1401	J2956783	CON-CP02PC-M3239A391~BEAB~
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240762F	32" BACKCOVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3100	E511134	C122P01H0112 SPK FOSTER
	#4003	B986429	C60 W\B 37:1419:C4161
	#4004	B986410	GREY C/M 158 DIC 543~TAM
	#4005	X212818F	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4041	N285045	ANTI-VIBRATION STRIP~TSA
	#4042	N286011	ANTI-VIBRATION STRIP~TSA
	#4043	N286011	ANTI-VIBRATION STRIP~TSA
	#4050	X321201	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4061	G863046	ANODE CLAMP ~RICHCO~
	#4062	J3731082	PURSE LOCK
	#4063	J3731082	PURSE LOCK
	#4064	G864002	CABLE TIE (TWIST TYPE)
	#4065	G864006	CABLE TIE T18R
	#4069	G864006	CABLE TIE T18R
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
⚠	#4100	E846916	EUROCORD FILTERED BEAB
	#4120	X551791	CONCEALED CONTROL TRIM
	#4130	X263541	CONTROL DOOR 32"(SERVICE)
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#4250	F823416	M4X16 PHB TIGHT SCR ~TR~
	#5070	G291311	3X12 BT SCREW (BLACK)
	#6010	G864006	CABLE TIE T18R
	#6015	G864008	CABLE TIE T18L H.S.
	E1	E841068	EARTH BRAID 32"
	E3	J2975131	CON-M103P+04PC-B1015
	E4701	E846942	&SPEAKER LEAD (32")
⚠	L910	L130049	76CM DGC84-098-4** BEAB
	MD380	DRG0380	DEG COIL DRESSING DRG
	SHIELD	N485007	INSULATOR SHIELD
⚠	V1	T176001	W76ESF031X13 - BEAB

	CP28W410TANAB	**FINAL ASSEMBLY**
	#2120	X100105	R/C HANDSET CLE-942
	#2130	JFQ00021	MANG BATT(UM3 HIT 25)2PACK
	#2160	B914225	TAPE CLIPPER 7120
⚠	#3000	X240938F	BACK COVER BEAB
	#3010	G863032	POWER CORD HANGER
	#3020	X870280	SAFETY TEST 25MM X 20MM
	#3060	F823416	M4X16 PHB TIGHT SCR ~TR~
	#4000	X213111F	FRONT FRAME PAINTED
	#4010	X640281	HITACHI BADGE
	#4050	X321201	MAINS KNOB
	#4051	H122015	MAINS KNOB SPRING
	#4060	G863046	ANODE CLAMP ~RICHCO~
	#4061	J3731082	PURSE LOCK
	#4063	G864006	CABLE TIE T18R
	#4064	G864006	CABLE TIE T18R
	#4067	J3731082	PURSE LOCK
	#4070	X425144	&IR LED LENS
	#4071	F813312	M3X12 FHTC SCR ~TR FAST~
	#4080	N332038	SPACER
	#4081	N232044	SPACER
	#4082	N332040	SPACER
	#4120	X551792	&CONCEALED CONTROL TRIM
	#4130	X263541	CONTROL DOOR 32"(SERVICE)
	#4140	J3875771	4 TO 2 LATCH
	#4150	F883630	M6X30 TAPPING SCREW FAST
	#4240	F823412	M4X12 PHB TIGHT SCR ~TR~
	#6060	B912319	WHITE GLASS NO69X19X33
	#6061	B912319	WHITE GLASS NO69X19X33
	#A03	F813312	M3X12 FHTC SCR ~TR FAST~
	E1	E841064	CPT EARTH BRAID
	E4000	E511145	SPEAKER - OLE WOLFF
	E4701	E846940	&SPEAKER LEAD
	E5	E846968	VM LEAD
⚠	E900	E846916	EUROCORD FILTERED BEAB
⚠	L910	L130048	66CM DGC84-098-4** BEAB
	N1	G864006	CABLE TIE T18R
	N10	G864002	CABLE TIE (TWIST TYPE)
	N12	J3731082	PURSE LOCK
	N2	G864006	CABLE TIE T18R
	N3	G864006	CABLE TIE T18R
	N4	G864006	CABLE TIE T18R
	N5	N934066	DEGUASSING COIL HOLDER
	N6	N934066	DEGUASSING COIL HOLDER
	N7	G864006	CABLE TIE T18R
	N8	G864006	CABLE TIE T18R
	SHIELD	N485007	INSULATOR SHIELD
	U201	E710056	UVE25-EW54D HYP MITS EXP
⚠	V1	T166033	W66QBD240X11 BEAB
	ZV1	B961105	SILCONE ADH 744 310ML

HITACHI

Hitachi, Ltd. Tokyo, Japan
International Sales Division
THE HITACHI ATAGO BUILDING,
No. 15 –12 Nishi Shinbashi, 2 – Chome,
Minato – Ku, Tokyo 105-8430, Japan.
Tel: 03 35022111

HITACHI EUROPE LTD.
Dukes Meadow
Millboard Road
Bourne End
Buckinghamshire
SL8 5XF
UNITED KINGDOM
Tel: 01628 643000
Fax: 01628 643400
Email: consumer-service@hitachi-eu.com

HITACHI EUROPE S.A.
364, Kifissias Ave. & 1, Delfon Str.
152 33 Chalandri
Athens
GREECE
Tel: 1-6837200
Fax: 1-6835694
Email: service.hellas@hitachi-eu.com

HITACHI EUROPE GmbH
Munich Office
Dornacher Strasse 3
D-85622 Feldkirchen bei München
GERMANY
Tel: +49 -89-991 80-0
Fax: +49 - 89 - 991 80 -224
Hotline: +49 - 180 - 551 25 51 (12ct/min.)
Email: HSE-DUS.Service@Hitachi-eu.com

HITACHI EUROPE S.A.
Gran Via Carlos III, 101 - 1
08028 Barcelona
SPAIN
Tel: 93 409 2550
Fax: 93 491 3513
Email: rplan@hitachi-eu.com

HITACHI EUROPE SRL
Via T. Gulli n.39
20147 MILAN
ITALY
Tel: 02 487861
Fax: 02 48786381
Servizio Clienti
Tel. 02 38073415
Email: customerservice.italy@hitachi-eu.com

HITACHI EUROPE AB
Box 77
S-164 94 KISTA
SWEDEN
Tel: 08 562 711 00
Fax: 08 562 711 11
Email: csgswe@hitachi-eu.com

HITACHI EUROPE S.A.S
Lyon Office
B.P. 45, 69671 Bron Cedex
FRANCE
Tel: 04 72 14 29 70
Fax: 04 72 14 29 99
Email: france.consommateur@hitachi-eu.com

HITACHI EUROPE LTD.
Norwegian Branch Office
Strandveien 18
1366 Dysaker
NORWAY
Tel: 02205 9060
Fax: 02205 9061
Email csgnor@hitachi-eu.com

ITEM N.V./S.A. (INTERNATIONAL TRADE FOR ELECTRONIC MATERIAL & MEDIA N.V./S.A)
UCO Tower – Bellevue, 17
B – 9050 GENT
BELGIUM (for BENELUX)
Tel: 09 230 48 01
Fax: 09 230 96 80
Email: hitachi.item@skynet.be

www.hitachi-consumer-eu.com

SM00030
Dec 2000